

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Key Features

- With DB9 cables you will no longer sacrifice convenience when it comes to the placement of computer peripherals in your work area! Let us give you the flexibility to add an existing piece of hardware wherever you need it. Our DB9 extension cables can convert your existing connections or replace the cables that restrict you. Each extension cable comes fully shielded to prevent against unwanted EMI/RFI interference, & its fully-molded design delivers excellent strain relief.

Specification

• Details:

Cable:

Length: 65.5ft

Connectors: 2x DB9-Female

Conductors: 28 Awg (7/0.12)

Color: Beige Jacket

Materials:

Contacts: Gold Flash 1u

Shell: Tin-Plated

Wire Insulation: PVC

Foil Sheild: Aluminum Mylar

Jacket: PVC

Insulator Material: Polyester Resin & Glass Fiber Reinforced (UL94V--0)

Electrical:

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Current Rating: 1 Amp

Dielectric Withstanding Voltage: AC 500V (for 1 minute)


Insulation Resistance: 1000MOhms Min. @ 500V DC

Contact Resistance: 15MOhms Max. Mated

Working Temperature: -55 deg. C to 105 deg. C

• Safety: UL94V--0

Technical Drawings / Photos

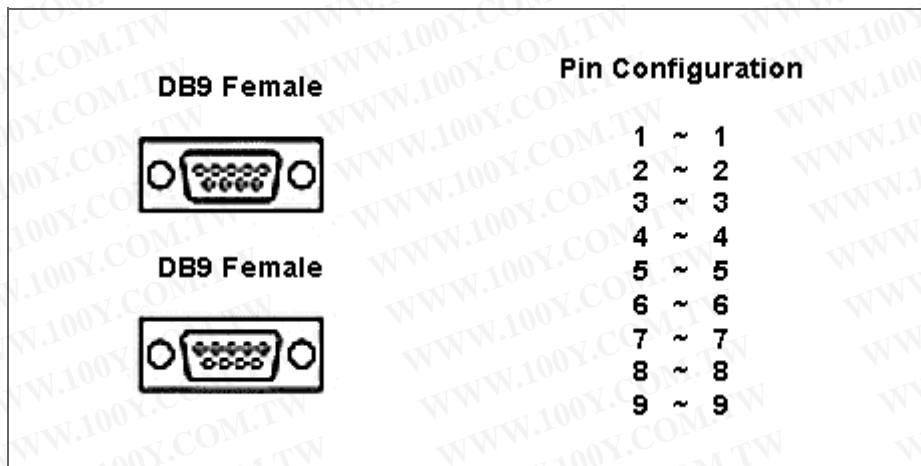

UL Information

• UL 94V-0