

ASA 好幫手全自動電動起子 / 防靜電型 Full-auto shut off electric screwdrivers / ESD type

低壓直流馬達驅動型 (附電源控制器)
Low voltage DC motor driving (with controller)



可訂製ESD防靜電型
ESD type is available for ordering.



特點 Feature

- 符合人因工學及蛋形防滑設計，外形輕便。
- 低噪音，高效率。
- 高精準，大範圍扭力輸出。
- 扭力到達，離合器自動準確跳脫。
- Ergonomics and anti-slip egg-shaped design ensures operator comfort.
- Low noise high efficiency.
- High accuracy and wide large torque range.
- Excellent torque control-Ensure accuracy in fastening with precision designed automatic shut-off clutch.

槓桿式 Lever start type · 下壓式 Push to start type (PS)

機種名 Model No.	輸出扭力範圍 Torque range		無載轉速 No Load Speed (rpm)	通用螺絲 Available screw	
	kgf-cm	lbf-in		機械牙徑 Machine screw ϕ	自攻牙徑 Tapping screw ϕ
ASA-6000	2.2 ~ 12.0	1.9 ~ 10.4	1250	2.0 ~ 3.0mm / 0.08 ~ 0.12in	2.0 ~ 2.6mm / 0.08 ~ 0.10in
ASA-6000PS	2.2 ~ 12.0	1.9 ~ 10.4	1000	2.0 ~ 3.0mm / 0.08 ~ 0.12in	2.0 ~ 2.6mm / 0.08 ~ 0.10in
ASA-6500	4.0 ~ 20.0	3.5 ~ 17.4	1000	2.6 ~ 4.0mm / 0.10 ~ 0.16in	2.3 ~ 3.5mm / 0.09 ~ 0.14in
ASA-6500PS	4.0 ~ 20.0	3.5 ~ 17.4	1000	2.6 ~ 4.0mm / 0.10 ~ 0.16in	2.3 ~ 3.5mm / 0.09 ~ 0.14in
ASA-6800	5.0 ~ 25.0	4.3 ~ 21.7	700	3.0 ~ 5.0mm / 0.12 ~ 0.20in	2.6 ~ 4.0mm / 0.10 ~ 0.16in
ASA-6800PS	5.0 ~ 25.0	4.3 ~ 21.7	700	3.0 ~ 5.0mm / 0.12 ~ 0.20in	2.6 ~ 4.0mm / 0.10 ~ 0.16in

適用電源控制器 Available controller

外觀 Outline	機種名 Model No.	工作電壓(AC) Operating vol.	輸出電壓(DC) Output vol.	體積(mm) Dimension	重量(g/lb) Weight	可操作起子數 Drivable	安規認可 Approval by
	APS-30UA	100 ~ 120V	30V (恆壓constant)	154 x 84 x 52	620 / 1.36	1 screwdriver	
	APS-30UE	220 ~ 240V					
	APT-65	115V 230V	30V / 20V	220 x 118 x 96	3400 / 7.5	1 screwdriver	


電動起子週邊設備 (選購品) Attachment of electric screwdriver (Optional)

外觀 Outline	名稱 Description	規格 Specification																
	彎90°轉接頭 Right angle head	4A9123A (槓桿式系列適用 lever start type series available)																
	扭力護套 Torque cover	4H2053 (槓桿式系列適用 lever start series available) 6H1047 (下壓式系列適用 Push to start series available)																
	彈吊車 Balancer	<table border="1"> <thead> <tr> <th>型號 Model</th> <th>載重 kgs Load</th> <th>lbs</th> <th>伸縮長 Extend L.</th> </tr> </thead> <tbody> <tr> <td>SB-1.2</td> <td>0.5-1.2</td> <td>1.1-2.6</td> <td>1.6 m</td> </tr> <tr> <td>SB-2.0</td> <td>1.0-2.0</td> <td>2.2-4.4</td> <td>1.6 m</td> </tr> <tr> <td>SB-3.5</td> <td>2.0-3.5</td> <td>4.4-6.8</td> <td>1.6 m</td> </tr> </tbody> </table>	型號 Model	載重 kgs Load	lbs	伸縮長 Extend L.	SB-1.2	0.5-1.2	1.1-2.6	1.6 m	SB-2.0	1.0-2.0	2.2-4.4	1.6 m	SB-3.5	2.0-3.5	4.4-6.8	1.6 m
型號 Model	載重 kgs Load	lbs	伸縮長 Extend L.															
SB-1.2	0.5-1.2	1.1-2.6	1.6 m															
SB-2.0	1.0-2.0	2.2-4.4	1.6 m															
SB-3.5	2.0-3.5	4.4-6.8	1.6 m															


工作電壓 Power Source	30VDC
扭力精度 Torque Accuracy	極精準(±3%) High precision(±3%)
扭力調整 Torque Setting	無段式 Stepless
重量 Weight	490g / 1.1lb 535g / 1.18lb(PS)
長度 Length	228mm / 9.0in 237mm / 9.3in(PS)
握持直徑 Grip diameter	34mm / 1.34in 33mm / 1.3in(PS)
適用起子頭 (選購品) Available bit size (optional)	ϕ 5, 6.35(1/4") 六角對邊 hex shank

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

輸出扭力曲線表 Torque Curve

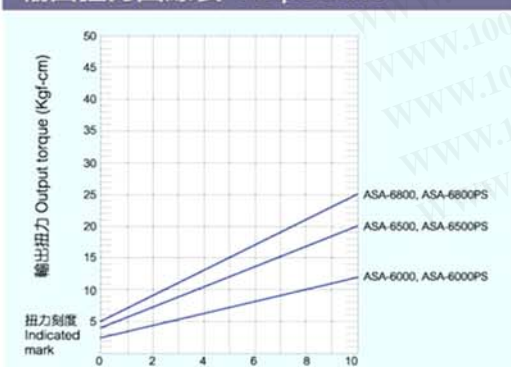

槓桿式 Lever start type

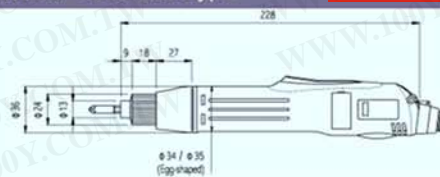

下壓式 Push to start type (PS)

