

Tilt Switch Ball-Rolling Switch AT Series



SPECIFICATION

- Electrical Rating : <6mA 24VDC
- Electrical Life: >50,000 Cycles
- Contact Resistance: 1 Ω
- Solder Temperature: 250°C 3 Seconds
- Ambient Temperature: 0°C~100°C



MATERIAL

- Canister: Copper Gold Plated
- Electrode: Copper Gold Plated
- Rolling Ball: Stainless Steel Gold Plated
- Insulated Piece: Nylon 46(94V-0)



AT407 (Gold Shell Coating)

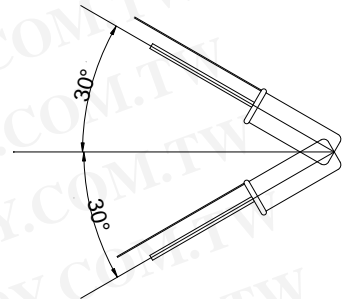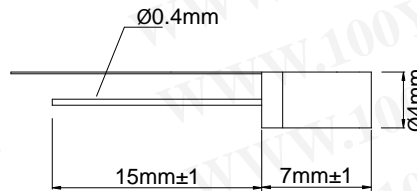

AT409

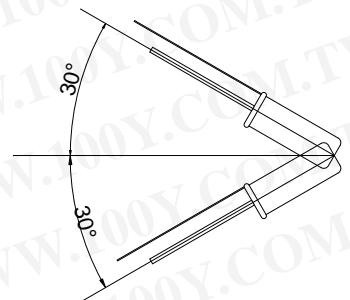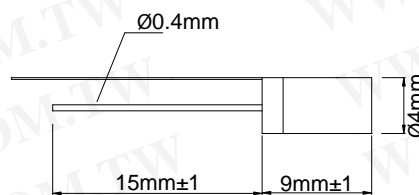



AT411

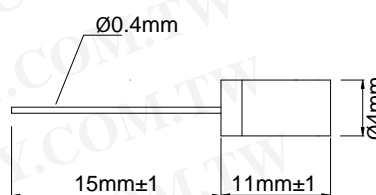



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Tilt Switch Ball Rolling Switch AT Series



AT411-2

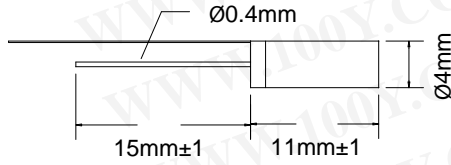



AT411-R2

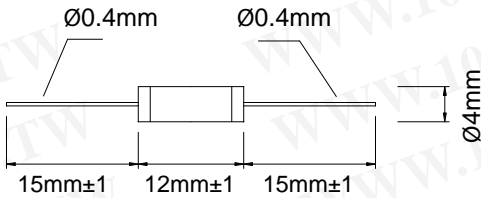

AT514

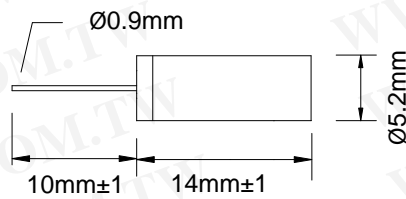

AT514-3

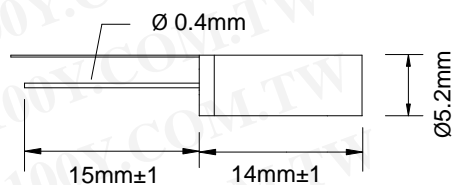

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)