

P2 Relay V23079

- Standard telecom relay (ringing and test access)
- Slim line 15x7.5mm (.590x.295")
- Switching current 5A
- 2 form C bifurcated contacts (2 changeover contacts, 2 CO)
- Immersion cleanable
- High sensitivity for low power consumption 140mW/ 70mW
- Single coil version with surge voltage resistance between contact and coil: 2.5kV (2/10μs) meets the Telcordia Requirement GR-1089, 1.5kV (10/160μs) meets FCC Part 68

Typical applications

Communications equipment linecard application (ringing and test access), PABX, voice over IP, office equipment, measurement and control equipment, automotive equipment as CAN bus, keyless entry, speaker switch, medical equipment, consumer electronics, set top boxes, HiFi



Approvals

UL 508 File No. E 111441, UL 60950,
 IEC/EN60950 IEC Ref. Cert. No. 327
 Technical data of approved types on request

Contact Data

Contact arrangement	2 form C (CO)
Max. switching voltage	220VDC, 250VAC
Rated current	2A
Limiting continuous current, 85°C	2A
Contact material	AgNi, gold-covered
Contact style	bifurcated contact
Min. recommended contact load	10mA at 20mV
Minimum switching voltage	100μV
Initial contact resistance	<50mΩ at 10mA, 20mV
Frequency of operation, without load	50 operations/s
Operate/release time max.	4 ms
Set/reset time max.	4 ms
Bounce time max.	3 ms
Electrical endurance	
at 12V / 10mA	typ. 5x10 ⁷ operations
at 6V / 100mA	typ. 1x10 ⁷ operations
at 60V / 500mA	typ. 5x10 ⁵ operations
at 30V / 1000mA	typ. 1x10 ⁶ operations
at 30V / 2000mA	typ. 2x10 ⁵ operations
Contact ratings, UL	220VDC / 0.24A - 60W 125VDC / 0.24A - 30W 250VAC / 0.25A - 62.5VA 125VAC / 0.5A - 62.5VA 30VDC / 2A - 60W
Mechanical endurance	typ. 100x10 ⁶ operations


Coil Data

Magnetic system	polarized
Coil voltage range	2 to 24VDC
Max. coil temperature	125°C
Thermal resistance	< 125K/W


Coil versions, monostable

Coil code	Rated voltage VDC	Operate voltage VDC	Limiting Voltage VDC	Release voltage VDC	Coil resistance Ω±10%	Rated coil power mW
008	3.00	2.25	6.50	0.30	64	140
016	4.00	3.00	8.70	0.40	114	140
011	4.50	3.38	9.80	0.45	145	140
001	5.00	3.75	10.90	0.50	178	140
002	6.00	4.50	13.00	0.60	257	140
006	9.00	6.75	19.60	0.90	578	140
003	12.00	9.00	26.15	1.20	1029	140
005	24.00	18.00	52.30	2.40	4114	140

All figures are given for coil without pre-energization, at ambient temperature +23°C.
 Other coil voltages on request.

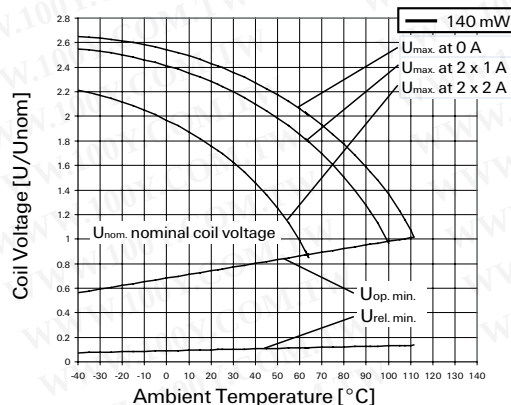

Max. DC load breaking capacity

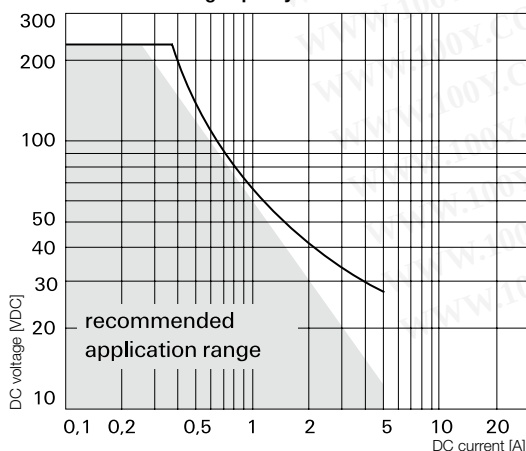


P2 Relay V23079 (Continued)

Coil Data (continued)

Coil versions, bistable

Coil code	Rated voltage VDC	Set voltage VDC	Limiting Voltage VDC	Reset voltage VDC	Coil resistance $\Omega \pm 10\%$	Rated coil power mW
Bistable, 1 coil						
108	3.00	2.25	9.2	-2.25	128	70
111	4.50	3.38	13.85	-3.38	289	70
101	5.00	3.75	15.33	-3.75	357	70
102	6.00	4.50	18.5	-4.50	514	70
106	9.00	6.75	27.75	-6.75	1157	70
103	12.00	9.00	37	-9.00	2057	70
105	24.00	18.00	74	-18.00	8228	70
Bistable, 2 coil						
219	2.00	1.50	4.33	1.50	28	140
218	2.40	1.80	5.2	1.80	41	140
208	3.00	2.25	6.5	2.25	64	140
211	4.50	3.38	9.8	3.38	145	140
201	5.00	3.75	10.9	3.75	178	140
202	6.00	4.50	13	4.50	257	140
206	9.00	6.75	19.6	6.75	578	140
203	12.00	9.00	26.15	9.00	1029	140
205	24.00	18.00	52.3	18.00	4114	140


All figures are given for coil without pre-energization, at ambient temperature +23°C.
Other coil voltages on request.

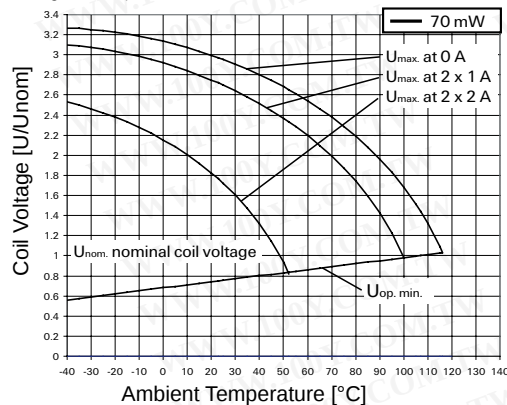

Coil versions, high dielectric version, monostable, overmolded

Coil code	Rated voltage VDC	Operate voltage VDC	Limiting Voltage VDC	Release Voltage VDC	Coil resistance $\Omega \pm 10\%$	Rated coil power mW
008	3.00	2.25	12.00	0.30	45	200
001	5.00	3.75	12.00	0.50	125	200
002	6.00	4.50	12.00	0.60	180	200
006	9.00	6.75	12.00	0.90	405	200
003	12.00	9.00	12.00	1.20	720	200

All figures are given for coil without pre-energization, at ambient temperature +23°C.
Other coil voltages on request.

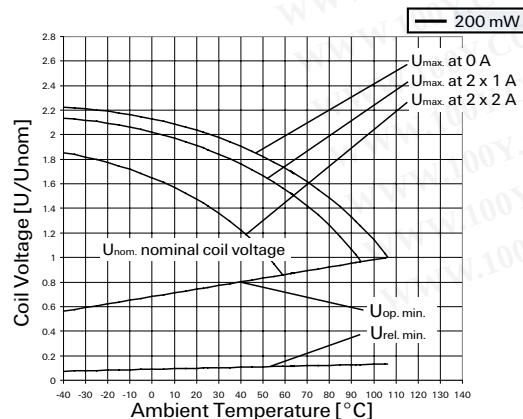

Insulation Data

Initial dielectric strength		
between open contacts	1000V _{rms}	1500V _{rms}
between contact and coil	1500V _{rms}	1500V _{rms}
between adjacent contacts	1000 V _{rms}	1500V _{rms}
Initial surge withstand voltage		
according to Telcordia TR-NWT-001089 (2/10μs)		
between open contacts	2000V	2500V
between contact and coil	2500V	2500V
between adjacent contacts	2500V	2500V
according to (10/700 μs IEC 60950)		
between open contacts	2000V	2500V
between contact and coil	2500V	2500V
between adjacent contacts	2500V	2500V
Initial insulation resistance at 500 Vdc		
	> 10 ⁹ Ω	
Capacitance		
between open contacts	max. 1pF	
between contact and coil	max. 2pF	
between adjacent contacts	max. 1.5pF	
Clearance /creepage		
according to IEC / EN 60950	1.3/2.5mm	

Other Data

Material compliance: EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at www.tycoelectronics.com/customer-support/rohssupportcenter		
Ambient temperature	-40 to +85°C	
Category of environmental protection IEC 61810	RT III - wash tight	
Degree of protection, IEC 60529	IP 67	
Vibration resistance (functional)	35g, 10 to 1000Hz	
Shock resistance (functional) IEC 60068-2-27 (half sine)	50g	
Terminal type	PCB-THT, SMT long and short terminals	
Weight	max. 2.8 g	
Resistance to soldering heat THT IEC 60068-2-20	265°C/10s	
Resistance to soldering heat SMT IEC 60068-2-58	see Resistance to soldering heat	
Moisture sensitive level, JEDEC J-Std-020D	MSL3	
Ultrasonic cleaning	not recommended	
Packaging/unit		
THT	box/2000 pcs.	
SMT	reel/2000 pcs. or 2500 pcs.	


勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

P2 Relay V23079 (Continued)


Terminal assignment

TOP view on component side of PCB


Monostable version



Bistable version, 1-coil



Bistable version, 2-coils




Contacts are shown in reset condition.
Both coils can be used as either set or reset coils.
Contact position might change during transportation and must be reset before use.


PCB layout

TOP view on component side of PCB


THT version

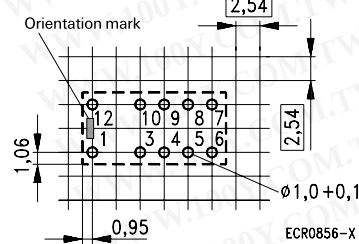

SMT, long terminals




SMT, short terminals




Dimensions

Standard coil


THT version



SMT, long terminals

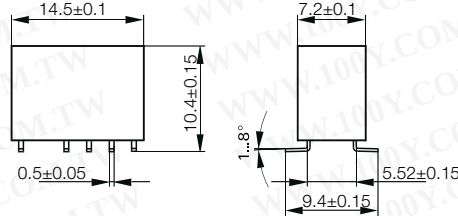


SMT, short terminals

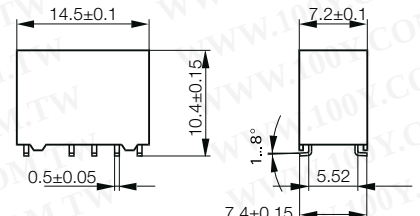


Overmolded coil, high dielectric version


THT version



SMT, long terminals



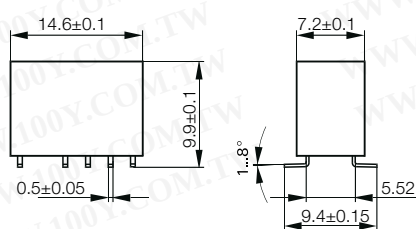


SMT, short terminals


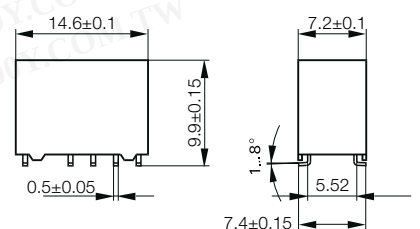


P2 Relay V23079 (Continued)


Processing

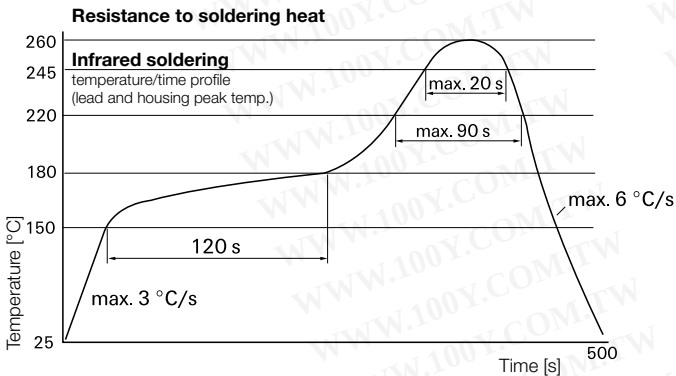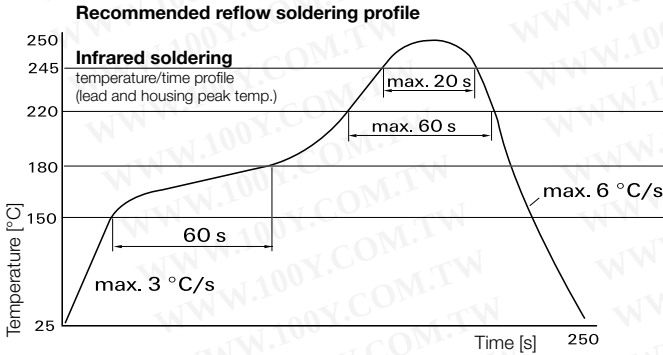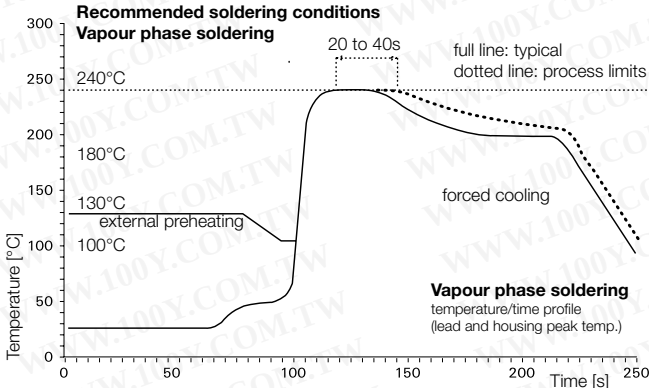

Packing

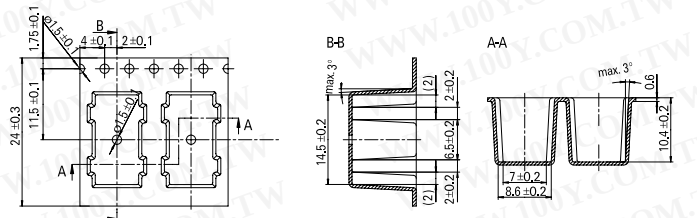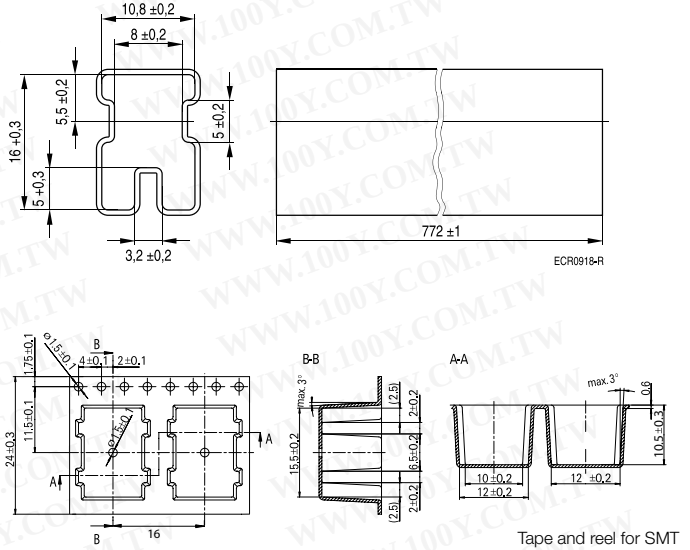

Reel dimensions

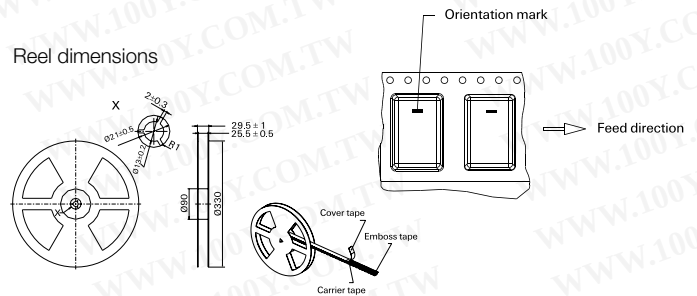

P2 Relay V23079 (Continued)

Product code structure

Typical product code

V23079
A
1
001
B
301

Type

V23079 Signal Relay P2 Series

Version

A THT, monostable

B THT, latching, 2 coils

C THT, latching, 1 coil

D SMT, monostable, long term.

E SMT, latching, 2 coils long term.

F SMT, latching, 1 coil long term.

G SMT, monostable, short term.

H SMT, latching, 2 coils short term.

J SMT, latching, 1 coil short term.

Coil design

1 Standard coil (not for high dielectric version)

2 Overmolded coil

Coil

Coil code: please refer to coil versions table

Version

B Standard version

X High dielectric version

Contacts for standard versions

301 2 form C contacts (2 CO), AgNi +Au

201 2 form C contacts (2 CO), AgPd +Au; on request only

Product code	Coil design	Version	Coil type	Coil voltage	Part number
V23079-A1008-B301	THT	Standard	Monostable	3VDC	2-1393788-2
V23079-A1016-B301				4VDC	2-1393788-9
V23079-A1011-B301				4.5VDC	2-1393788-4
V23079-A1001-B301				5VDC	1393788-3
V23079-A1002-B301				6VDC	1393788-8
V23079-A1006-B301				9VDC	2-1393788-0
V23079-A1003-B301				12VDC	1-1393788-1
V23079-A1005-B301				24VDC	1-1393788-6
V23079-A2008-B301		Overmolded		3VDC	6-1419120-6
V23079-A2011-B301				4.5VDC	3-1393789-9
V23079-A2001-B301				5VDC	3-1393789-5
V23079-A2002-B301				6VDC	3-1393789-6
V23079-A2006-B301				9VDC	3-1393789-8
V23079-A2003-B301				12VDC	3-1393789-7
V23079-B1218-B301		Standard	Bistable, 2 coils	2.4VDC	1422002-8
V23079-B1208-B301				3VDC	4-1393788-1
V23079-B1211-B301				4.5VDC	4-1393788-2
V23079-B1201-B301				5VDC	3-1393788-3
V23079-B1202-B301				6VDC	3-1393788-5
V23079-B1206-B301				9VDC	3-1393788-9
V23079-B1203-B301				12VDC	3-1393788-6
V23079-B1205-B301				24VDC	3-1393788-7
V23079-B2219-B301	Overmolded			2VDC	1-1422002-2
V23079-B2218-B301				2.4VDC	1-1422002-1
V23079-B2208-B301				3VDC	1-1422002-0
V23079-B2201-B301				5VDC	1422002-9
V23079-C1108-B301	Standard	Standard	Bistable, 1 coil	3VDC	5-1393788-3
V23079-C1111-B301				4.5VDC	5-1393788-4
V23079-C1101-B301				5VDC	4-1393788-5
V23079-C1102-B301				6VDC	4-1393788-7
V23079-C1106-B301				9VDC	5-1393788-1
V23079-C1103-B301				12VDC	4-1393788-8
V23079-C1105-B301				24VDC	5-1393788-0

P2 Relay V23079 (Continued)

Product code	Version	Version	Coil type	Coil voltage	Part number	
V23079-D1008-B301	SMT, long pins		Monostable	3VDC	6-1393788-1	
V23079-D1011-B301				4.5VDC	6-1393788-2	
V23079-D1001-B301				5VDC	5-1393788-5	
V23079-D1002-B301				6VDC	5-1393788-6	
V23079-D1006-B301				9VDC	5-1393788-9	
V23079-D1003-B301				12VDC	5-1393788-7	
V23079-D1005-B301				24VDC	5-1393788-8	
V23079-D2008-B301		Overmolded			3VDC	4-1393789-7
V23079-D2011-B301					4.5VDC	4-1393789-8
V23079-D2001-B301					5VDC	4-1393789-3
V23079-D2002-B301					6VDC	4-1393789-4
V23079-D2006-B301					9VDC	4-1393789-6
V23079-D2003-B301					12VDC	4-1393789-5
V23079-E1219-B301			Standard		Bistable, 2 coils	2VDC
V23079-E1218-B301		2.4VDC		1422007-5		
V23079-E1208-B301		3VDC		7-1393788-1		
V23079-E1211-B301		4.5VDC		7-1393788-2		
V23079-E1201-B301		5VDC		6-1393788-8		
V23079-E1202-B301		6VDC		1393789-5		
V23079-E1206-B301		9VDC		1393789-9		
V23079-E1203-B301		12VDC		6-1393788-9		
V23079-E1205-B301		24VDC		7-1393788-0		
V23079-F1108-B301		Bistable, 1 coil		3VDC	7-1393788-5	
V23079-F1111-B301				4.5VDC	1-1393789-4	
V23079-F1101-B301				5VDC	7-1393788-3	
V23079-F1102-B301				6VDC	1-1393789-0	
V23079-F1106-B301				9VDC	1-1393789-2	
V23079-F1103-B301				12VDC	7-1393788-4	
V23079-F1105-B301				24VDC	1-1393789-1	
V23079-G1008-B301	SMT, short pins	Monostable		3VDC	8-1393788-0	
V23079-G1011-B301				4.5VDC	1-1393789-7	
V23079-G1001-B301				5VDC	7-1393788-6	
V23079-G1002-B301				6VDC	1-1393789-5	
V23079-G1006-B301				9VDC	1-1393789-6	
V23079-G1003-B301				12VDC	7-1393788-7	
V23079-G1005-B301				24VDC	7-1393788-8	
V23079-G2008-B301			Overmolded	3VDC	5-1393789-4	
V23079-G2016-B301				4VDC	1393790-5	
V23079-G2011-B301				4.5VDC	5-1393789-5	
V23079-G2001-B301				5VDC	4-1393789-9	
V23079-G2002-B301				6VDC	5-1393789-0	
V23079-G2006-B301				9VDC	5-1393789-3	
V23079-G2003-B301				12VDC	5-1393789-1	
V23079-H1208-B301		Standard	Bistable, 2 coils	3VDC	2-1393789-4	
V23079-H1211-B301				4.5VDC	8-1393788-4	
V23079-H1201-B301				5VDC	2-1393789-0	
V23079-H1202-B301				6VDC	2-1393789-1	
V23079-H1206-B301				9VDC	2-1393789-3	
V23079-H1203-B301				12VDC	8-1393788-3	
V23079-H1205-B301				24VDC	2-1393789-2	
V23079-J1108-B301			Bistable, 1 coil	3VDC	2-1393789-9	
V23079-J1111-B301				4.5VDC	3-1393789-0	
V23079-J1101-B301				5VDC	2-1393789-5	
V23079-J1102-B301				6VDC	2-1393789-6	
V23079-J1103-B301				12VDC	2-1393789-7	
V23079-J1105-B301				24VDC	2-1393789-8	
V23079-G2008-X079		High dielectric	Monostable	3VDC	1422006-5	
V23079-G2001-X071				5VDC	1422006-1	
V23079-G2002-X072	6VDC			1422006-2		
V23079-G2006-X073	9VDC			1422006-3		
V23079-G2003-X074	12VDC			1422006-4		