

Edge Card Connector Slot 2.54mm (0.100")

Material and Finish:

Insulator: Glass-Filled Thermoplastic (PBT) UT94V-0

Contact: Phosphor Bronze or Bronze

Finishes: Tin Plated, Contact Area: Gold Plated

Performance Characteristics:

Contact Rating: 3 Amperes Continuous.

Contact Resistance: 12 Milliohms Max.

Operating Temperature: -55°C~+105°C

Voltage Rating (Sea Level): 1000 Vac

Insulation Resistance: 5000 Megohms Min. After Exposure to Humidity



Vibration Tolerance: 10 to 500 Hertz

Contact Engagement Force: 12.0 Ounces Average Per Pair with 0.062 (1.57) PC Board

Contact Separation Force: 2 Ounces Average Per Pair 0.62 PC Board

Humidity Tolerance: 90%~95% for 96 Hours

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

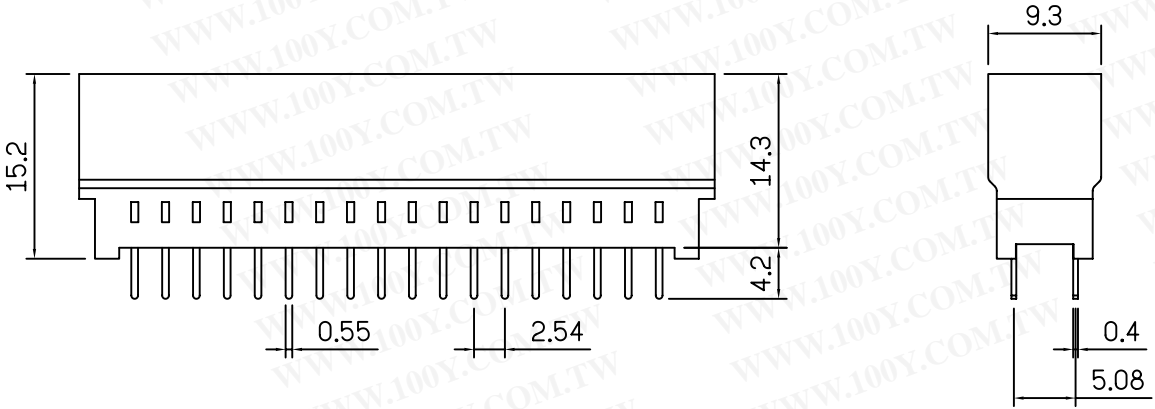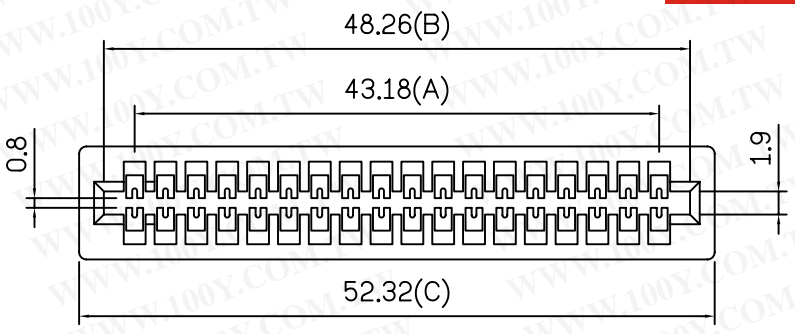

Dimension

Position	6 thru 120
A	2.54 * (Position No. /2) - 2.54
B	2.54 * (Position No. /2) + 2.54
C	2.54 * (Position No. /2) + 6.60