




$A = (\text{NO. OF POSITION PER ROW}) \times 2.54 + 0.50$   
 $B = (\text{NO. OF POSITION PER ROW} - 1) \times 2.54$

**SPECIFICATIONS**

Current Rating: 3 Amp. Max.  
 Withstanding Voltage: 1000V AC R.M.S. /min  
 Insulation Resistance: 5000M ohms min. At 1000V DC  
 Contact Resistance: 30m ohms Max.  
 Operating Temperature: -55° C to +105° C

**MATERIAL&FINISH**

Housing: P. B. T. (UL 94V-0)  
 Color: Black  
 Terminal: Copper Alloy  
 Finish: Gold Plating(t=0.40MM)

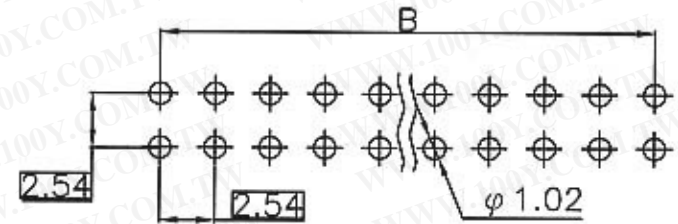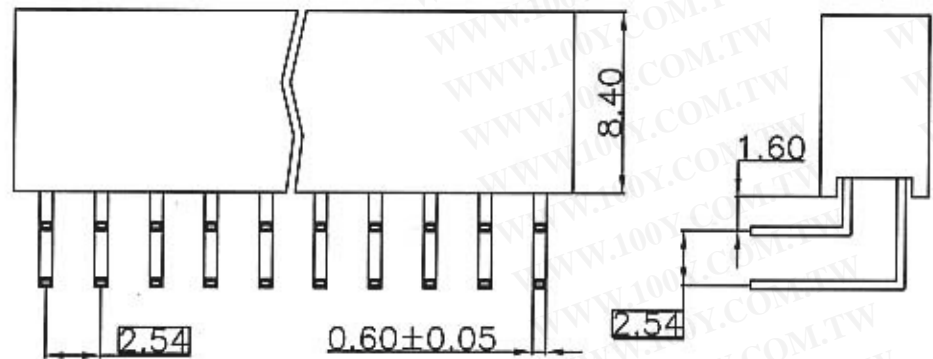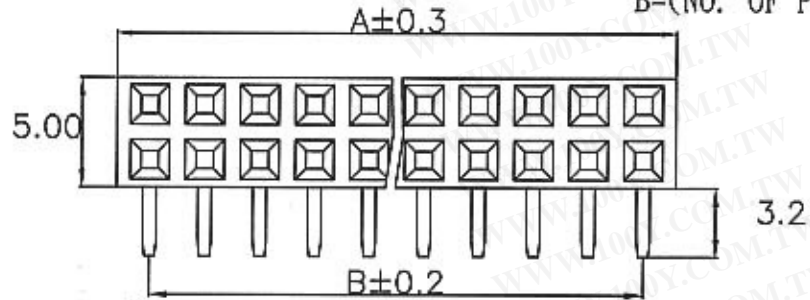

**RECOMMEND P.C.B. LAYOUT  
BOTTOM VIEW**

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

				UNIT		SCALE		PART NAME	
				MM		3:1		2.54mm FEMALE HEADER 90° DUAL ROW H=8.4mm	
DRAWING.		APPROVED		APPD.	CKD.	TOLERANCE		PART NO.	REV.
制表日: 2002/12/04		<i>Jane</i>				± 0.3			A