


Fast-Acting Ferrule Fuses

13/32" x 1-1/2" Midget

2/10-30 Amps

BAF

Dimensional Data

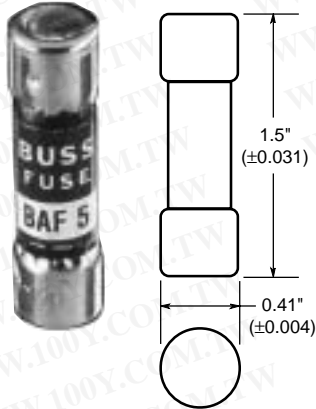

Catalog Symbol: BAF (5AG)

Fast-Acting

2/10 TO 30

UL Recognized, STD. 248-14

0-15/250Vac

(GUIDE # JDYX, FILE # E19180)

CSA CERTIFIED

0-15/250Vac

(CLASS 1422-01, FILE # 53787)

- Fibre tube.
- Nickel plated brass endcaps.

Electrical Ratings (Catalog Symbol and Amperes)

250Vac IR*	250Vac IR*	250Vac IR*	125Vac
BAF-2/10	BAF-1-1/2	BAF-6-1/4	BAF-20
BAF-1/4	BAF-1-8/10 IR	BAF-7 IR	BAF-25 IR
BAF-1/2 IR	BAF-2 100A	BAF-8 200A	BAF-30 10,000A
BAF-6/10 35A	BAF-2-1/2	BAF-9	—
BAF-8/10	BAF-3	BAF-10	—
BAF-1	BAF-4 IR	BAF-12 750A	—
—	BAF-5 200A	BAF-15	—
—	BAF-6	—	—


*All have interrupting rating of 10,000A at 125V.


DC ratings: 3-6A, 150Vdc; 6-1/4-15A, 12Vdc; 10 KAIC.

Carton Quantity and Weight

Ampere Ratings	Carton Qty	Weight Lbs.	Kg.
2/10-30	100	1.3	0.590


Time-Current Characteristic Curves—Average Melt

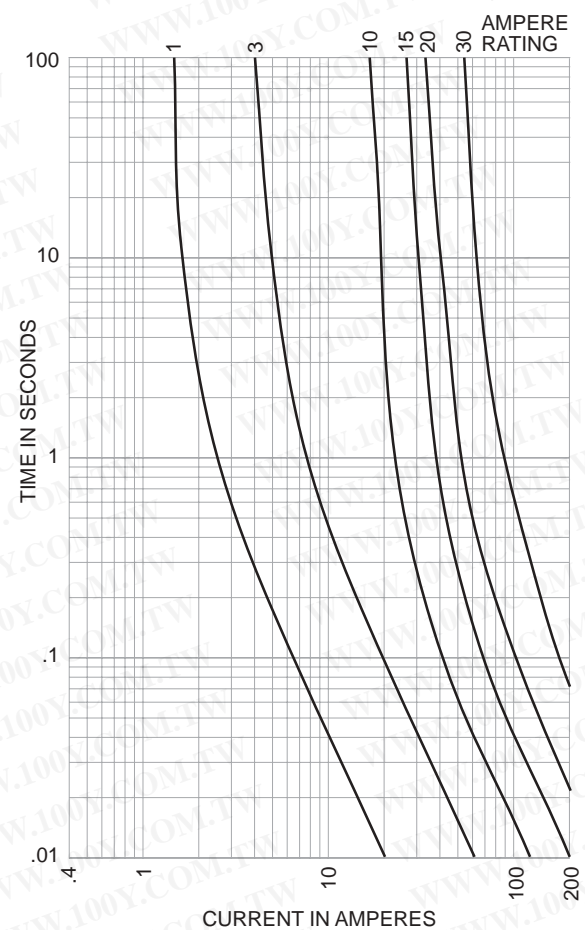



Recommended fuseblocks/fuseholders for 13/32" x 1-1/2" fuses
 See Data Sheets listed below

- Open fuseblocks - 1104, 2104
- Finger-safe fuseholders - 1109, 1102, 1103, 1151
- Panel-mount fuseholders - 2114, 2113, 2108, 2112, 2109, 2140
- In-line fuseholders - 2127, 2126



The only controlled copy of this Data Sheet is the electronic read-only version located on the Bussmann Network Drive. All other copies of this Data Sheet are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.