


Ferrule Type, Fast-Acting Fuses

BAN


For 13/32" x 1-1/2" (10.3mm x 38.1mm)



Dimensional Data

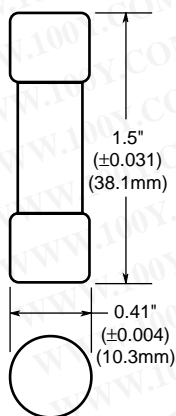

Time-Current Characteristic Curves—Average Melt (Full Size Curves Available)

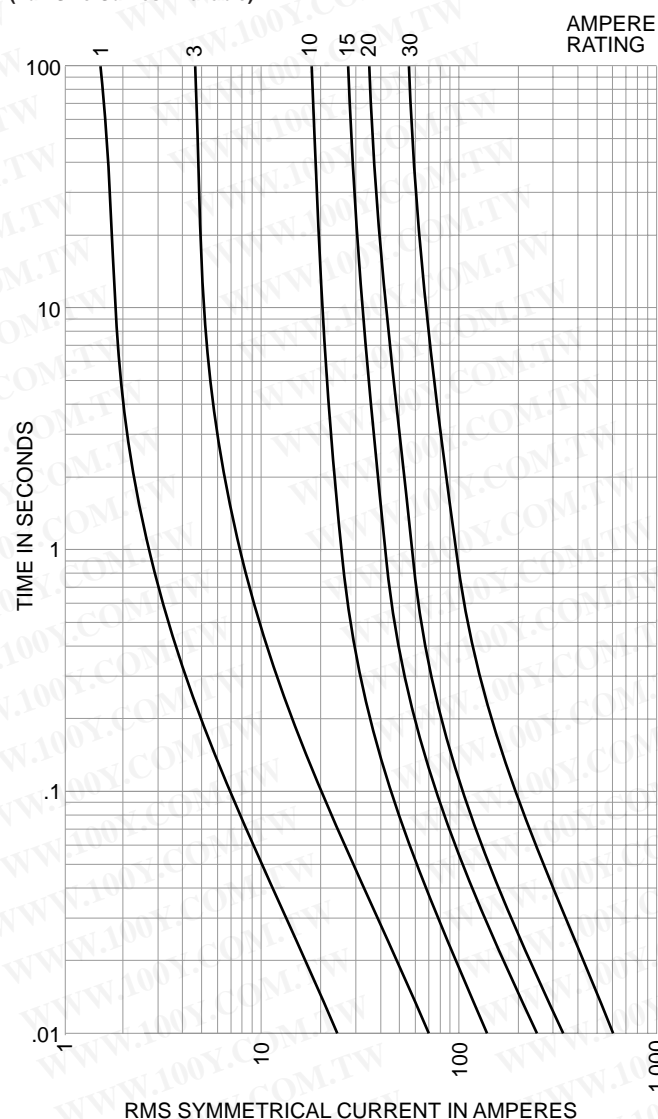

Catalog Symbol: BAN
13/32" x 1-1/2" (10.3mm x 38.1mm) 5AG

Ferrule Type, Fast-Acting

1-30A
250Vac

Body Material: FIBRE TUBE

Ferrule Material: BRONZE

Ferrule Plating: NICKEL

Interrupting Ratings: Military Tested

35A (1.1 - 3.5A)
100A (3.6 - 10A)
200A (10.1 - 15A)
750A (15.1 - 30A)

- Fibre; formerly 5AB.
- Mounts in Buss BM series fuseblocks.

Electrical Ratings (Catalog Symbol and Amperes)

250Vac


BAN-1	BAN-5	BAN-10	BAN-25
BAN-2	BAN-6	BAN-12	BAN-30
BAN-3	BAN-7	BAN-15	—
BAN-4	BAN-8	BAN-20	—

Carton Quantity and Weight

Ampere Ratings	Carton Qty	Weight*	
		Lbs.	Kg.
1-30	100	1.4	635

*Weight per carton.





Recommended fuseblocks/fuseholders for 13/32" x 1-1/2" fuses
See Data Sheets listed below

- Open fuseblocks - 1104, 2104
- Finger-safe fuseholders - 1109, 1102, 1103, 1151
- Panel-mount fuseholders - 2114, 2113, 2108, 2112, 2109, 2140
- In-line fuseholders - 2127, 2126

The only controlled copy of this Data Sheet is the electronic read-only version located on the Bussmann Network Drive. All other copies of this Data Sheet are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw