

PowerMOS transistor

Logic level TOPFET

BUK112-50GL

DESCRIPTION

Monolithic temperature and overload protected logic level power MOSFET in a 5 pin plastic envelope, intended as a low side switch for automotive applications.

FEATURES

- Vertical power DMOS output stage
- Low on-state resistance
- Low operating supply current
- Overtemperature protection
- Overload protection against short circuit load with drain current limiting
- Latched overload protection reset by protection supply
- Protection circuit condition indicated by flag pin
- Off-state detection of open circuit load indicated by flag pin
- 5 V logic compatible input level
- Integral input resistors.
- ESD protection on all pins
- Over voltage clamping

QUICK REFERENCE DATA

SYMBOL	PARAMETER	MAX.	UNIT
V_{DS}	Continuous drain source voltage	50	V
I_D	Continuous drain current	12	A
T_J	Continuous junction temperature	150	°C
$R_{DS(ON)}$	Drain-source on-state resistance	93	mΩ
SYMBOL	PARAMETER	NOM.	UNIT
V_{PS}	Protection supply voltage	5	V

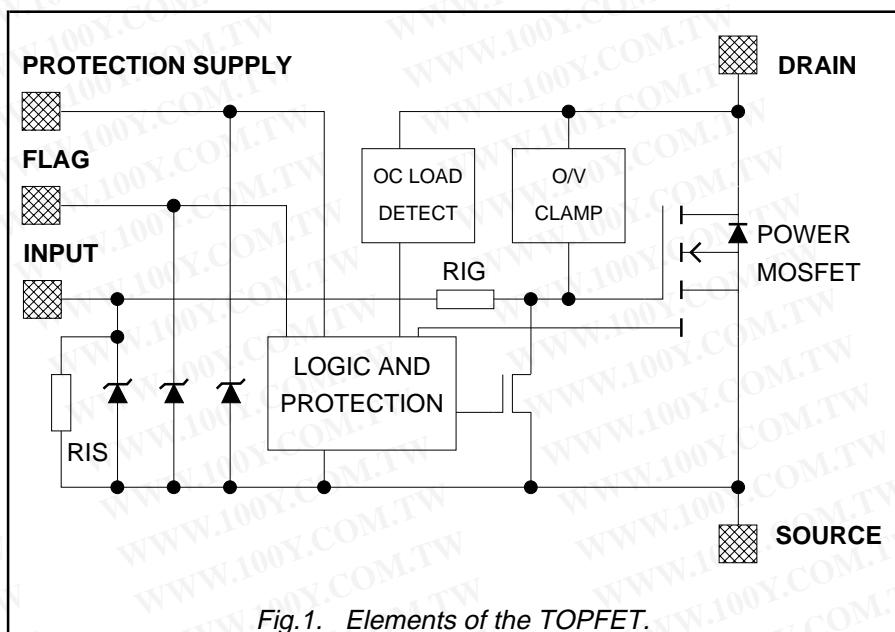
FUNCTIONAL BLOCK DIAGRAM

Fig.1. Elements of the TOPFET.

PINNING - SOT263

PIN	DESCRIPTION
1	input
2	flag
3	drain
4	protection supply
5	source
tab	drain

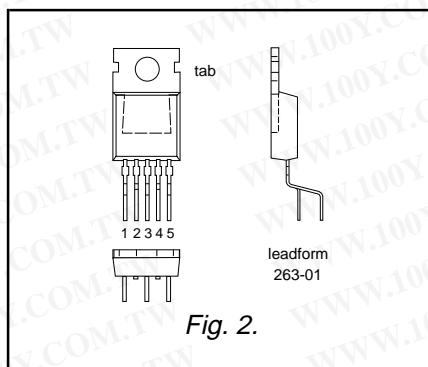
PIN CONFIGURATION

Fig. 2.

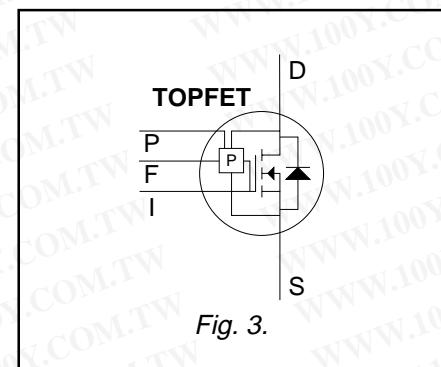
SYMBOL

Fig. 3.

勝特力材料 886-3-5753170
 胜特力电子(上海) 86-21-54151736
 胜特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

PowerMOS transistor

Logic level TOPFET

勝特力材料 886-3-5753170
 胜特力电子(上海) 86-21-54151736
 胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

BUK112-50GL

LIMITING VALUES

Limiting values in accordance with the Absolute Maximum Rating System (IEC 134)

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{DS}	Continuous voltage Drain source voltage ¹	$V_{IS} = 0 \text{ V}$	-	50	V
I_D	Continuous currents Drain current	$V_{PS} = 5 \text{ V}; T_{mb} = 25^\circ\text{C}$	-	self - limited	A
I_I	Input current	$V_{PS} = 0 \text{ V}; T_{mb} = 94^\circ\text{C}$	-5	12	A
I_F	Flag current	-	5	5	mA
I_P	Protection supply current	-	5	5	mA
P_{tot}	Thermal Total power dissipation	$T_{mb} = 25^\circ\text{C}$	-	52	W
T_{stg}	Storage temperature	-	-55	175	°C
T_j	Junction temperature ²	continuous	-	150	°C
T_{sold}	Lead temperature	during soldering	-	260	°C

ESD LIMITING VALUES

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{C1}	Electrostatic discharge capacitor voltages Drain to source	Human body model; $C = 100 \text{ pF}; R = 1.5 \text{ k}\Omega$	-	4.5	kV
V_{C2}	Input, flag or protection to source		-	2	kV

OVERLOAD PROTECTION LIMITING VALUE

With the protection supply connected, TOPFET can protect itself from two types of overload - short circuit load and overtemperature.

For overload conditions an n-MOS transistor turns on between the gate and source to quickly discharge the power MOSFET gate capacitance.

The drain current is limited to reduce dissipation in case of short circuit load. Refer to OVERLOAD CHARACTERISTICS.

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{PSP}	Protection supply voltage ³	for valid protection	4.5	-	V

OVERVOLTAGE CLAMPING LIMITING VALUES

At a drain source voltage above 50 V the power MOSFET is actively turned on to clamp overvoltage transients.

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
E_{DSM}	Non-repetitive clamping energy	$I_{DM} = 6 \text{ A}; T_{mb} = 25^\circ\text{C}$	-	200	mJ
E_{DRM}	Repetitive clamping energy	$I_{DM} = 3.1 \text{ A}; V_{DD} \leq 20 \text{ V}; T_{mb} \leq 120^\circ\text{C}; f = 250 \text{ Hz}$	-	20	mJ

¹ Prior to the onset of overvoltage clamping. For voltages above this value, safe operation is limited by the overvoltage clamping energy.

² A higher T_j is allowed as an overload condition but at the threshold $T_{j(TO)}$ the over temperature trip operates to protect the switch.

³ The minimum supply voltage required for correct operation of the overload protection circuits.

PowerMOS transistor
 Logic level TOPFET

BUK112-50GL

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$R_{th\ j-mb}$	Thermal resistance Junction to mounting base	-	-	-	2.38	K/W
$R_{th\ j-a}$	Junction to ambient in free air	-	60	-	-	K/W

OUTPUT CHARACTERISTICS

 $T_{mb} = 25^\circ C$; $V_{PS} = 0 V$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$V_{(CL)DSS}$	Off-state Drain-source clamping voltage	$I_D = 10 \text{ mA}$; $-40^\circ C \leq T_{mb} \leq 150^\circ C$ $I_{DM} = 0.75 \text{ A}$; $t_p \leq 300 \mu\text{s}$; $\delta \leq 0.01$	50	-	70	V
I_{DSS}	Drain-source leakage current ¹	$V_{IS} = 0 V$; $V_{DS} = 13 V$ $V_{DS} = 50 V$ $T_{mb} = 125^\circ C$; $V_{DS} = 40 V$	-	0.5 1 10	10 20 100	μA μA μA
$R_{DS(ON)}$	On-state Drain-source on-resistance	$t_p \leq 300 \mu\text{s}$; $\delta \leq 0.01$ $I_{DM} = 6 \text{ A}$; $V_{IS} = 4.4 V$; $V_{PS} = 4.5 V$ $T_{mb} = 150^\circ C$	-	70 135	93 165	$\text{m}\Omega$ $\text{m}\Omega$

INPUT CHARACTERISTICS

 $T_{mb} = 25^\circ C$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$V_{IS(TO)}$	Normal operation Input threshold voltage	$V_{DS} = 13 V$; $V_{PS} = 0 V$; $I_D = 1 \text{ mA}$ $-40^\circ C \leq T_{mb} \leq 150^\circ C$	1 0.5	1.5 -	2 2.5	V
I_{IS}	Input current	$V_{IS} = 5 V$; $-40^\circ C \leq T_{mb} \leq 150^\circ C$	200	350	500	μA
$V_{(CL)IS}$	Input clamping voltage	$I_I = 1.5 \text{ mA}$	6	7.1	-	V
R_{IG}	Internal series resistance to gate of power MOSFET		-	1.5	-	$\text{k}\Omega$
I_{ISL}	Overload protection latched Input current	$V_{PS} = 5 V$; $V_{IS} = 5 V$	1.5	3.2	4	mA

REVERSE CHARACTERISTICS

 $T_{mb} = 25^\circ C$

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$-V_{DS}$	Reverse drain voltage ²	$-I_D = 6 \text{ A}$	-	0.8	-	V
$-V_{IS}$	Reverse input voltage	$-I_I = 5 \text{ mA}$	-	0.7	-	V
$-V_{PS}$	Reverse protection pin voltage	$-I_P = 5 \text{ mA}$	-	0.7	-	V
$-V_{FS}$	Reverse flag voltage	$-I_F = 5 \text{ mA}$	-	0.7	-	V

¹ The drain current required for open circuit load detection is switched off when there is no protection supply, in order to ensure a low off-state quiescent current. Refer to OPEN CIRCUIT LOAD DETECTION CHARACTERISTICS.

² Protection functions are disabled during reverse conduction.

**PowerMOS transistor
Logic level TOPFET**

勝特力材料 886-3-5753170
 胜特力电子(上海) 86-21-54151736
 胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

BUK112-50GL

PROTECTION SUPPLY CHARACTERISTICS $T_{mb} = 25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
I_{PS}, I_{PSL}	Normal operation or protection latched	$V_{PS} = 4.5 \text{ V}$ $-40^\circ\text{C} \leq T_{mb} \leq 150^\circ\text{C}$	-	330	400	μA
	Supply current				450	μA
$V_{(CL)PS}$	Clamping voltage	$I_P = 1.5 \text{ mA}$	6	7.1	-	V
V_{PSR}	Overload protection latched	$-40^\circ\text{C} \leq T_{mb} \leq 150^\circ\text{C}$	-	2.1	-	V
	Reset voltage				3	V
t_{pr}	Reset time	$V_{PS} = 0 \text{ V}$ $-40^\circ\text{C} \leq T_{mb} \leq 150^\circ\text{C}$	-	25	-	μs
					150	μs

OPEN CIRCUIT LOAD DETECTION CHARACTERISTICS

An open circuit load condition can be detected while the TOPFET is in the off-state.
 $-40^\circ\text{C} \leq T_{mb} \leq 150^\circ\text{C}; V_{PS} = 5 \text{ V}; V_{DS} = 13 \text{ V}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
I_{DSP}	Off-state drain current ¹	$V_{IS} = 0 \text{ V}$	0.5	1.4	2	mA
I_{DSF}	Off-state drain threshold current	$V_{IS} = 0 \text{ V}; I_F = 100 \mu\text{A}$	0.4	1.1	-	mA
V_{ISF}	Input threshold voltage ²	$I_F = 100 \mu\text{A}; I_D = 100 \mu\text{A}; T_{mb} = 25^\circ\text{C}$	-	1.2	-	V

TRUTH TABLE

For normal, open-circuit load and overload conditions or inadequate protection supply voltage.

CONDITION	PROTECTION	INPUT	FLAG	OUTPUT
Normal on-state	1	1	0	1
Normal off-state	1	0	0	0
Open circuit load	1	1	0	1
Open circuit load	1	0	1	0
Short circuit load	1	1	1	0
Over temperature	1	X	1	0
Low protection supply voltage	0	1	1	1
Low protection supply voltage	0	0	1	0

For protection '0' equals low, '1' equals high.

For input '0' equals low, '1' equals high, 'X' equals don't care.

For flag '0' equals low, '1' equals open or high.

For output switch '0' equals off, '1' equals on.

¹ The drain source current which flows when the protection supply is high and the input is low.² For open circuit load indication, V_{IS} must be less than V_{ISF} .

PowerMOS transistor

Logic level TOPFET

BUK112-50GL

OVERLOAD CHARACTERISTICS

 $T_{mb} = 25^\circ\text{C}$; $V_{PS} = 5\text{ V}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
I_D	Short circuit load protection	$V_{IS} = 5\text{ V}$	12	24	36	A
$P_{D(TO)}$	Drain current limiting	$V_{DS} = 13\text{ V}$ $-40^\circ\text{C} \leq T_{mb} \leq 150^\circ\text{C}$	-	100	-	W
E_{DSC}	Overload power threshold ¹	for protection to operate which determines trip time ²	-	200	-	mJ
I_{DM}	Characteristic energy	$V_{DD} = 13\text{ V}$; $R_L \leq 10\text{ m}\Omega$	-	45	-	A
$T_{j(TO)}$	Overtemperature protection	$I_D \geq 1\text{ A}$	150	185	215	°C

FLAG CHARACTERISTICS

The flag is an open drain transistor which requires an external pull-up circuit.

 $T_{mb} = 25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
V_{FSF}	Flag 'low'	normal operation; $V_{PS} = 5\text{ V}$	-	0.7	-	V
	Flag voltage	$I_F = 100\text{ }\mu\text{A}$ $-40^\circ\text{C} \leq T_{mb} \leq 150^\circ\text{C}$	-	-	0.9	V
I_{FSF}	Flag saturation current	$V_{FS} = 5\text{ V}$	-	10	-	mA
I_{FSO}	Flag 'high'	overload or fault	-	0.1	1	μA
	Flag leakage current	$V_{FS} = 5\text{ V}$ $T_{mb} = 150^\circ\text{C}$	-	1	10	μA
$V_{(CL)FS}$	Flag clamping voltage	$I_F = 100\text{ }\mu\text{A}$	6	6.9	-	V
V_{PSF}	Protection supply threshold voltage ⁴	$I_F = 100\text{ }\mu\text{A}; V_{DS} = 5\text{ V}$ $-40^\circ\text{C} \leq T_{mb} \leq 150^\circ\text{C}$	2.5	3	4	V
R_F	Application information		2	-	4	V
	Suitable external pull-up resistance	$V_{FF} = 5\text{ V}$	-	50	-	kΩ

勝特力材料 886-3-5753170
 胜特力电子(上海) 86-21-54151736
 胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

¹ Refer to figure 15.² Trip time $t_{dsc} \approx E_{DSC} / [P_D - P_{D(TO)}]$. Refer also to figure 15.³ For short circuit load connected after turn-on.⁴ When V_{PS} is less than V_{PSF} the flag pin indicates low protection supply voltage. Refer to TRUTH TABLE.

**PowerMOS transistor
Logic level TOPFET**

BUK112-50GL

SWITCHING CHARACTERISTICS

$T_{mb} = 25^\circ\text{C}$



SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT	
$t_{d\ on}$	Resistive load	$R_L = 4 \Omega; I_D = 3 \text{ A}$	-	0.6	-	μs	
	Turn-on delay time	$V_{IS}: 0 \text{ V} \Rightarrow 5 \text{ V}$		2.8	-	μs	
	Rise time	$V_{IS}: 5 \text{ V} \Rightarrow 0 \text{ V}$		3.5	-	μs	
	Turn-off delay time			3.2	-	μs	
t_f	Fall time			0.6	-	μs	
	Inductive load	$I_D = 3 \text{ A}; V_{DD} = 13 \text{ V};$ with freewheel diode					
	Turn-on delay time	$V_{IS}: 0 \text{ V} \Rightarrow 5 \text{ V}$		0.9	-	μs	
	Rise time	$V_{IS}: 5 \text{ V} \Rightarrow 0 \text{ V}$		1.2	-	μs	
$t_{d\ off}$	Turn-off delay time			6.7	-	μs	
	Fall time			0.6	-	μs	

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

PowerMOS transistor Logic level TOPFET

BUK112-50GL

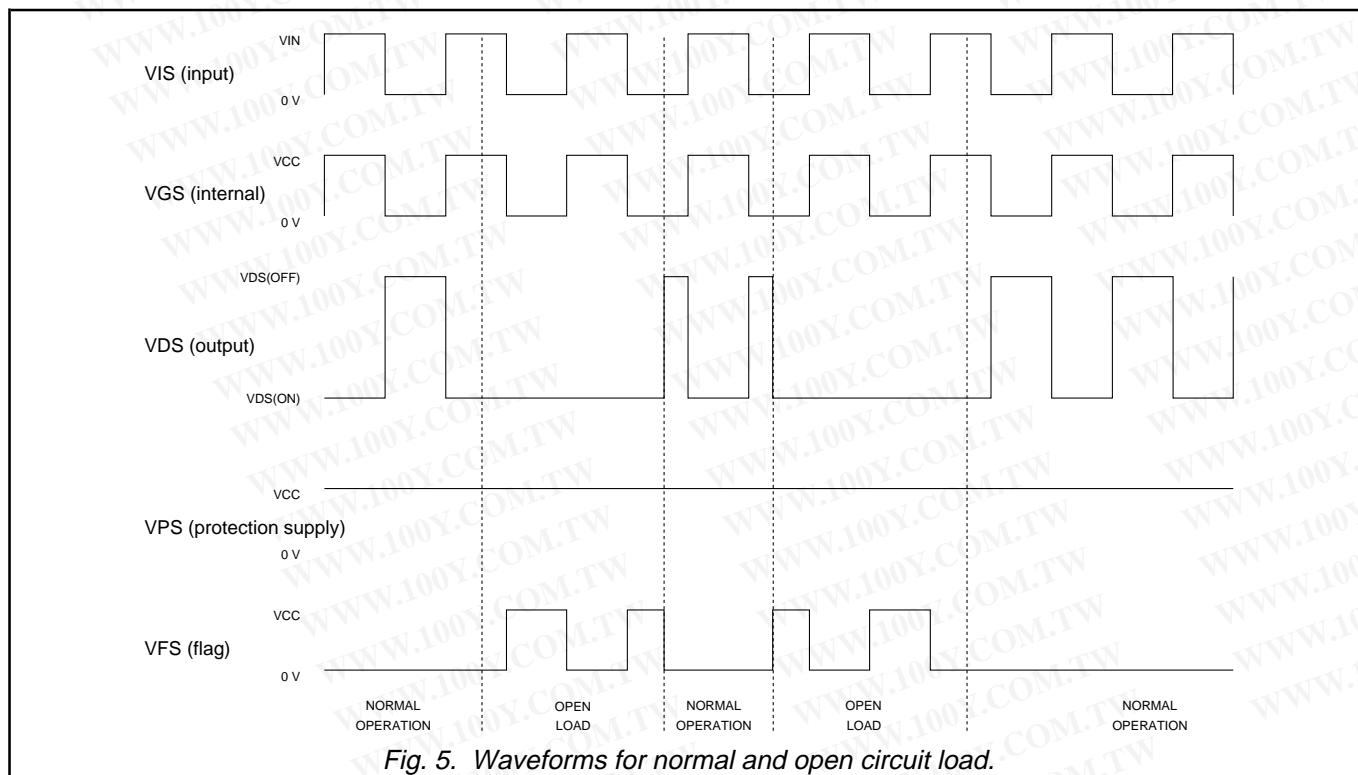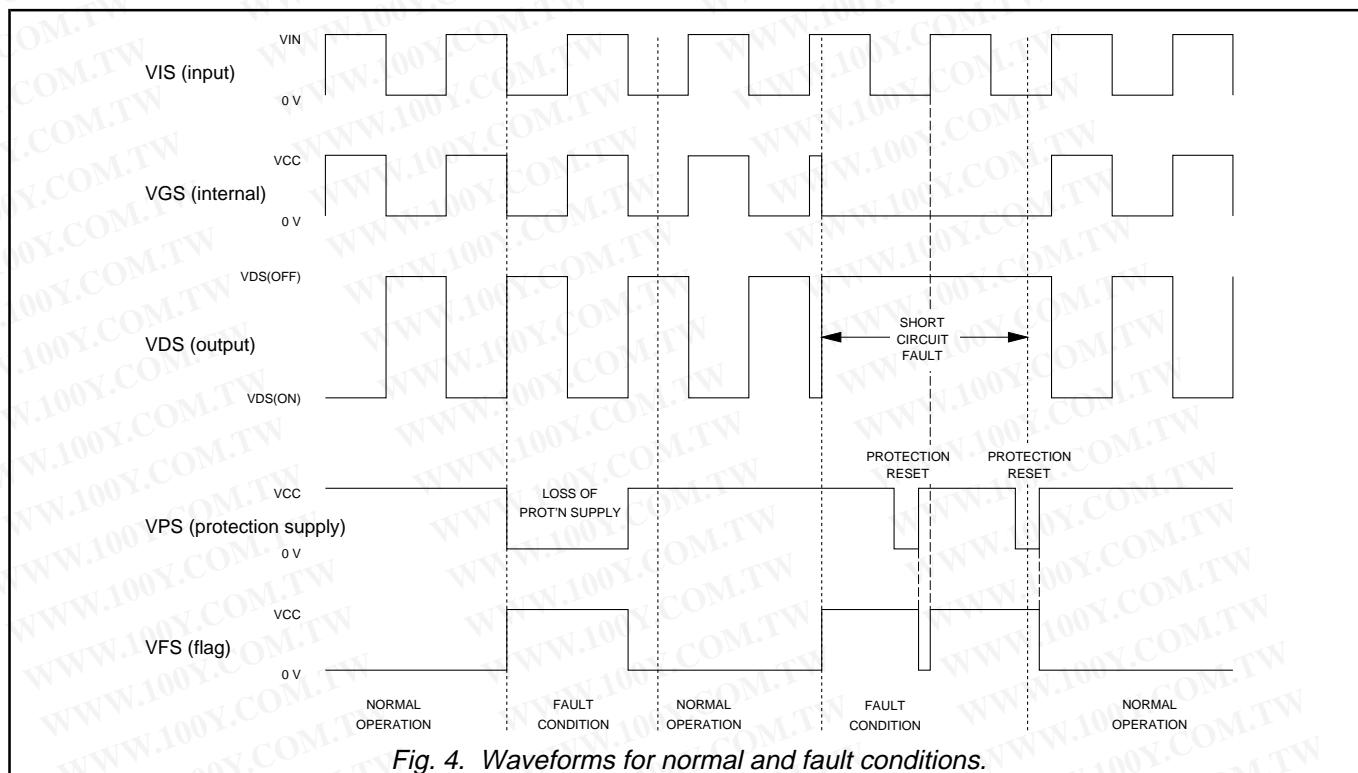

PowerMOS transistor

Logic level TOPFET

BUK112-50GL

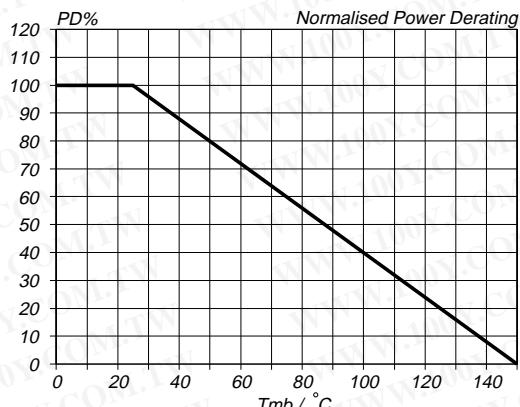


Fig.6. Normalised limiting power dissipation.
 $P_D\% = 100 \cdot P_D/P_D(25^\circ C) = f(T_{mb})$

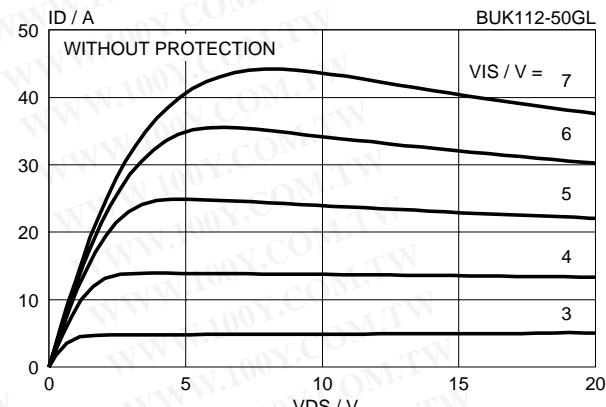


Fig.9. Typical output characteristics, $T_j = 25^\circ C$.
 $I_D = f(V_{DS})$; $t_p = 250 \mu s$; $V_{PS} = 0 V$; parameter V_{IS}

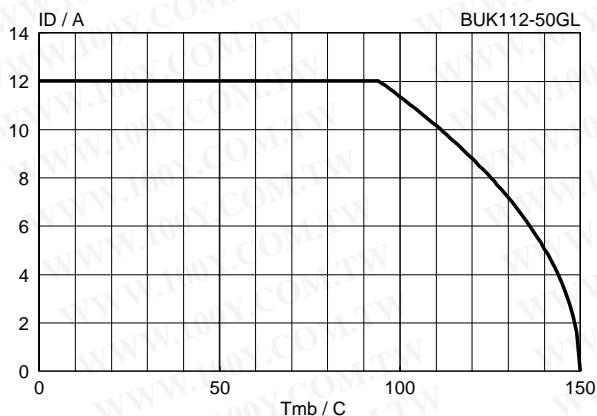


Fig.7. Continuous limiting drain current.
 $I_D = f(T_{mb})$; conditions: $V_{IS} = 5 V$; $V_{PS} = 5 V$

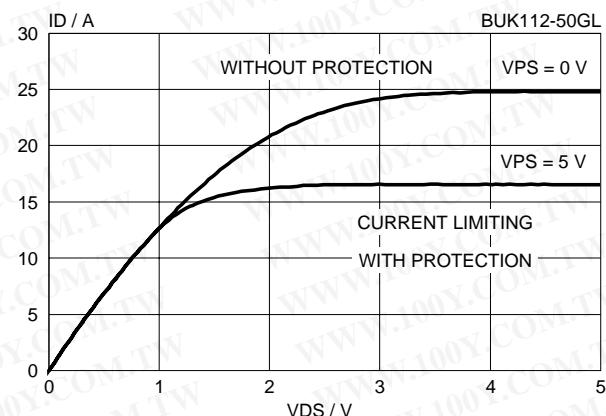


Fig.10. Typical on-state characteristics, $T_j = 25^\circ C$.
 $I_D = f(V_{DS})$; $V_{IS} = 5 V$; $t_p = 250 \mu s$; parameter V_{PS}

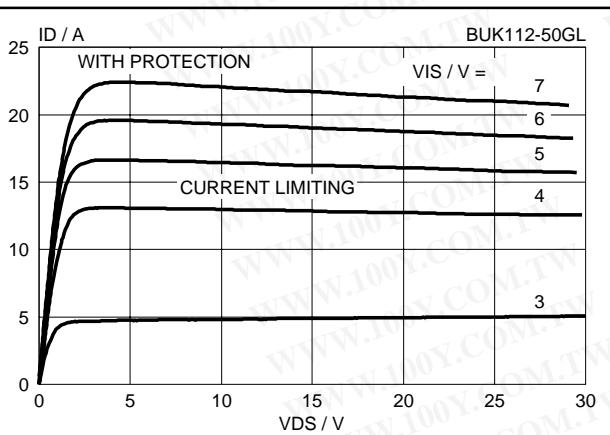


Fig.8. Typical output characteristics, $T_j = 25^\circ C$.
 $I_D = f(V_{DS})$; $t_p = 250 \mu s$; $V_{PS} = 5 V$; parameter V_{IS}

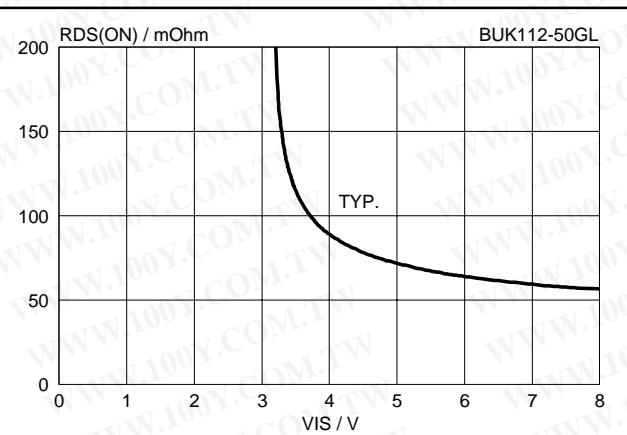


Fig.11. Typical on-state resistance, $T_j = 25^\circ C$.
 $R_{DS(ON)} = f(V_{IS})$; $t_p = 250 \mu s$; parameter V_{IS}

PowerMOS transistor

Logic level TOPFET

BUK112-50GL

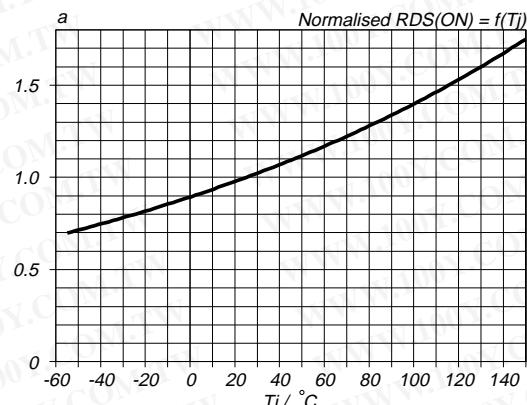


Fig.12. Normalised drain-source on-state resistance.
 $a = R_{DSON}/R_{DSON}25^\circ\text{C} = f(T_j)$; $I_D = 6 \text{ A}$; $V_{IS} \geq 4.4 \text{ V}$

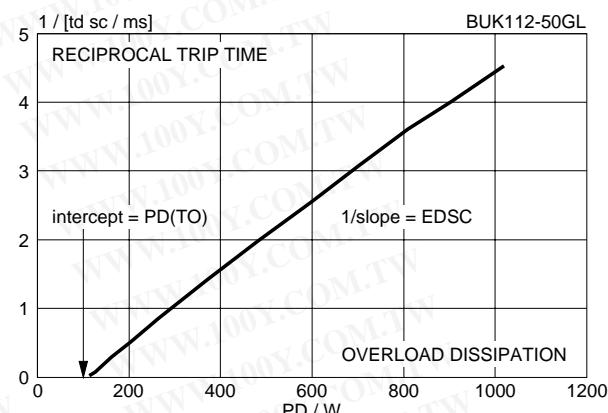


Fig.15. Typical reciprocal overload trip time.
 $1/t_{dsc} = f(P_D)$; conditions: $V_{PS} = 5 \text{ V}$, $T_{mb} = 25^\circ\text{C}$

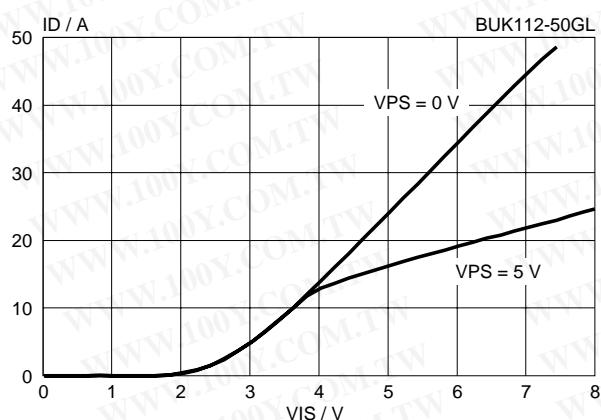


Fig.13. Typical transfer characteristics, $T_j = 25^\circ\text{C}$.
 $I_D = f(V_{IS})$; conditions: $V_{DS} = 10 \text{ V}$; $t_p = 250 \mu\text{s}$

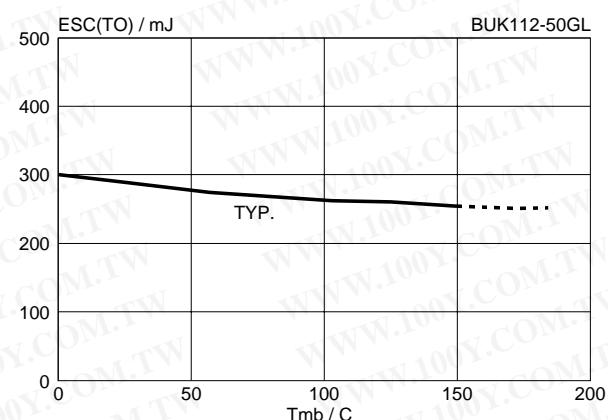


Fig.16. Typical overload protection energy.
 $E_{SC(TO)} = f(T_{mb})$; $V_{DD} = 13 \text{ V}$; $V_{PS} = 5 \text{ V}$, $V_{IS} = 5 \text{ V}$

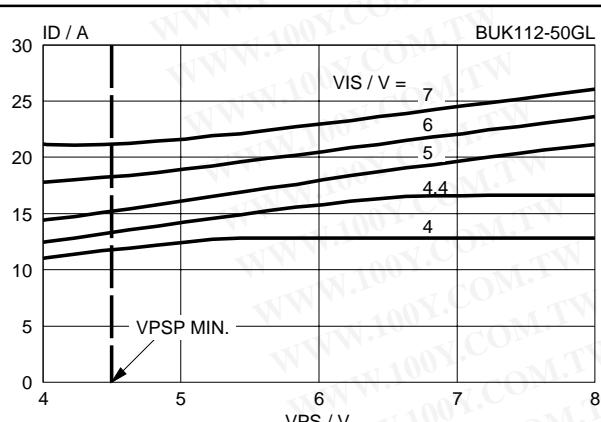


Fig.14. Typical output current limiting, $T_j = 25^\circ\text{C}$.
 $I_D = f(V_{PS})$; $t_p = 250 \mu\text{s}$; $V_{DS} = 10 \text{ V}$; parameter V_{IS}

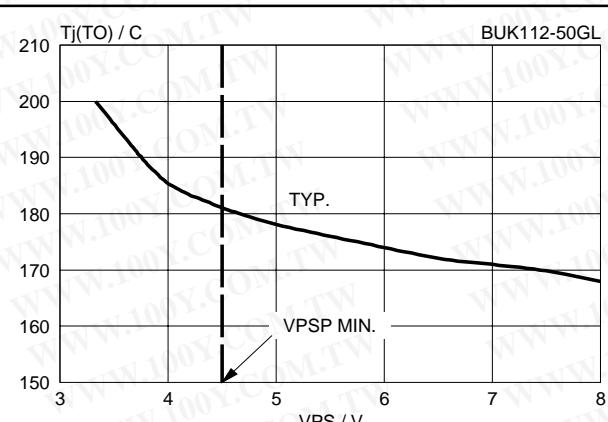


Fig.17. Typical overtemperature protection threshold.
 $T_{j(TO)} = f(V_{PS})$; $V_{IS} = 5 \text{ V}$; $I_D \geq 1 \text{ A}$

PowerMOS transistor
Logic level TOPFET

BUK112-50GL

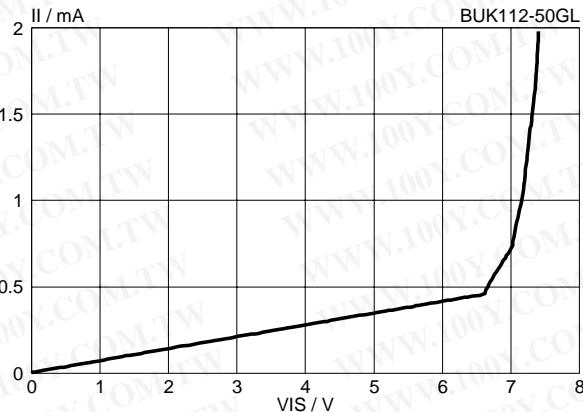


Fig. 18. Typical DC input characteristic.
 $I_I = f(V_{IS})$ normal operation; $T_j = 25^\circ\text{C}$

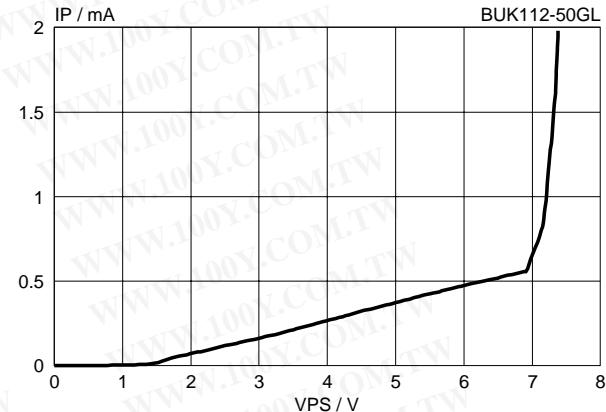


Fig. 21. Typical protection supply characteristics.
 $I_P = f(V_{PS})$; normal or overload operation; $T_j = 25^\circ\text{C}$

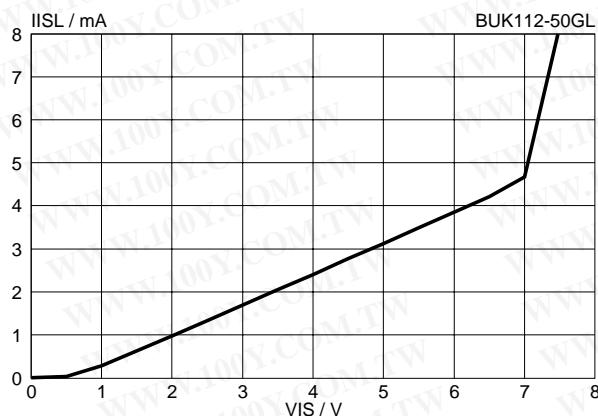


Fig. 19. Typical DC input characteristic, $T_j = 25^\circ\text{C}$.
 $I_{ISL} = f(V_{IS})$ overload protection latched; $V_{PS} = 5\text{V}$

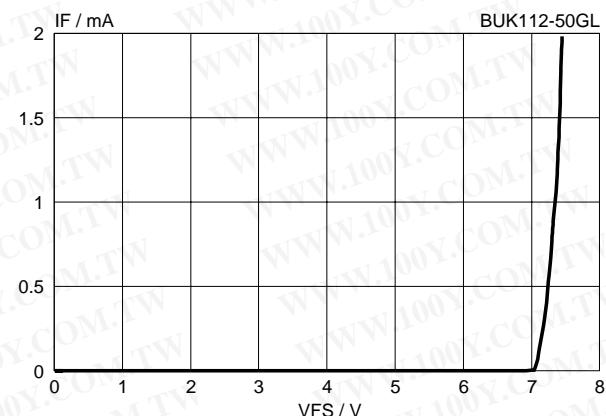


Fig. 22. Typical flag high characteristic, $T_j = 25^\circ\text{C}$.
 $I_F = f(V_{FS})$; refer to TRUTH TABLE

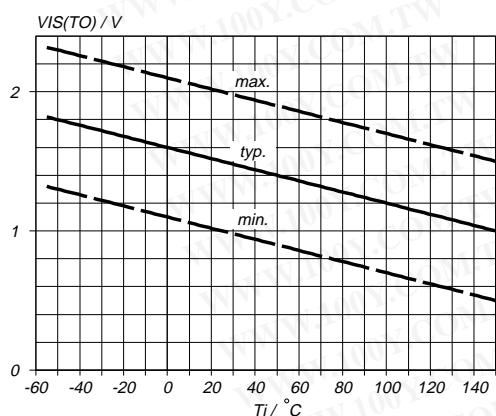


Fig. 20. Input threshold voltage.
 $V_{IS(TO)} = f(T_j)$; conditions: $I_D = 1\text{ mA}$; $V_{DS} = 5\text{ V}$

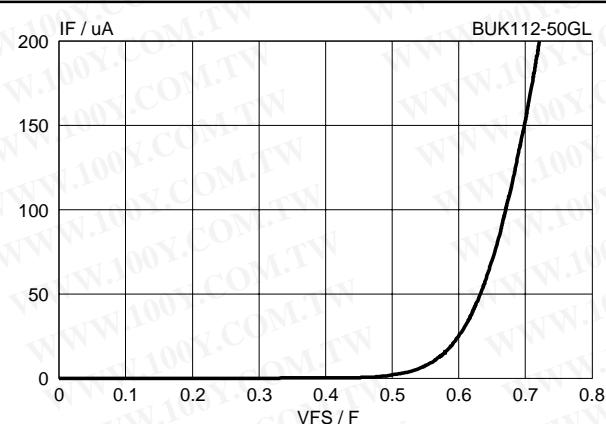


Fig. 23. Typical flag low characteristic, $T_j = 25^\circ\text{C}$.
 $I_F = f(V_{FS})$; $V_{PS} = 5\text{ V}$; refer to TRUTH TABLE

PowerMOS transistor

Logic level TOPFET

BUK112-50GL

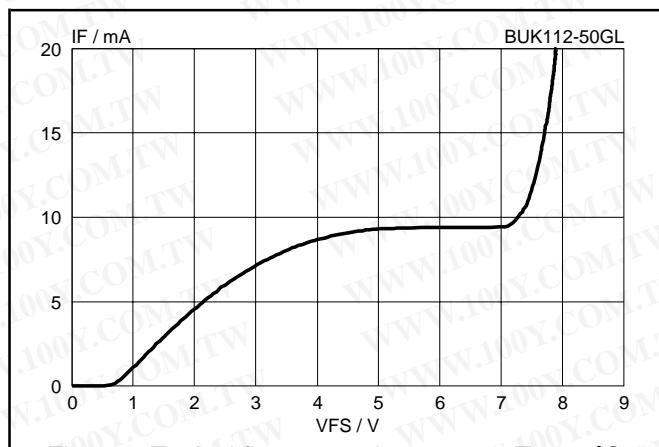


Fig.24. Typical flag saturation current, $T_j = 25^\circ\text{C}$.
 $I_F = f(V_{FS})$; flag 'low'; external $R_F = 0 \text{ k}\Omega$; $V_{PS} = 5 \text{ V}$

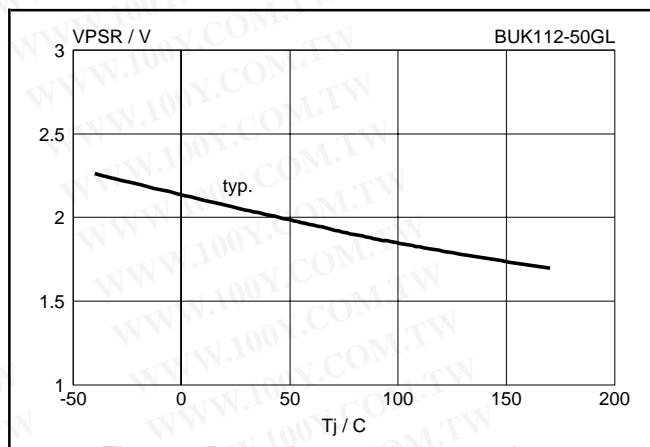


Fig.27. Protection supply reset voltage.
 $V_{PSR} = f(T_j)$

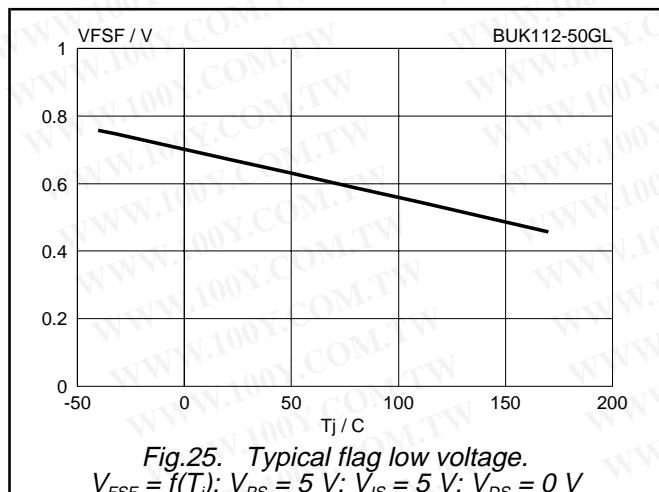


Fig.25. Typical flag low voltage.
 $V_{FSF} = f(T_j)$; $V_{PS} = 5 \text{ V}$; $V_{IS} = 5 \text{ V}$; $V_{DS} = 0 \text{ V}$

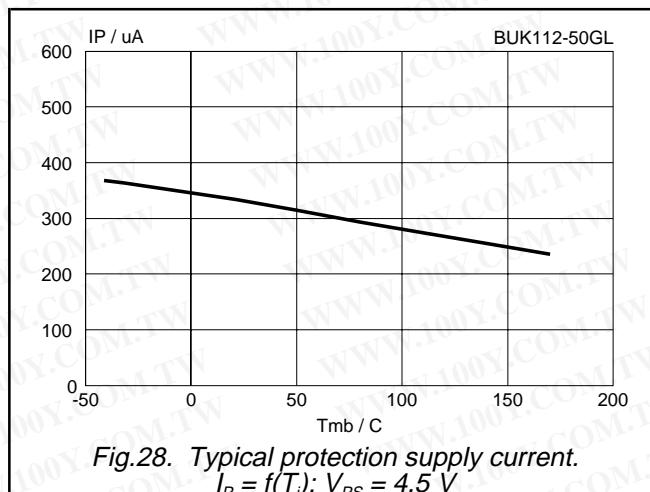


Fig.28. Typical protection supply current.
 $I_P = f(T_j)$; $V_{PS} = 4.5 \text{ V}$

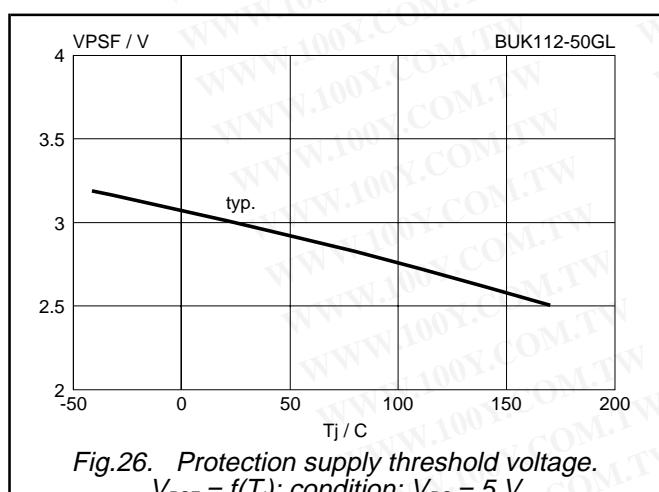


Fig.26. Protection supply threshold voltage.
 $V_{PSF} = f(T_j)$; condition: $V_{DS} = 5 \text{ V}$

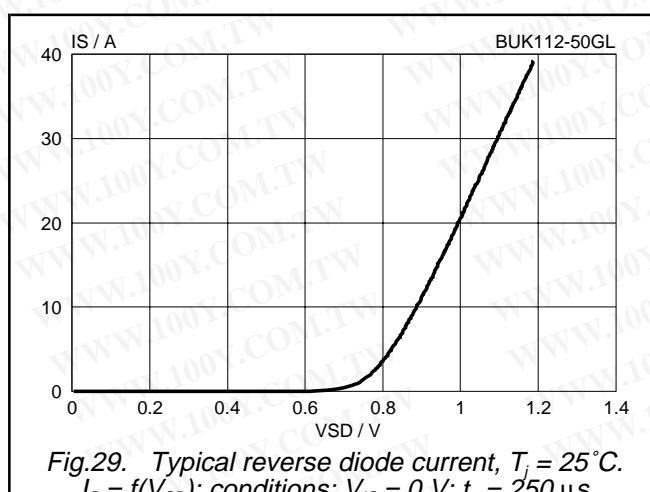


Fig.29. Typical reverse diode current, $T_j = 25^\circ\text{C}$.
 $I_S = f(V_{SD})$; conditions: $V_{IS} = 0 \text{ V}$; $t_p = 250 \mu\text{s}$

勝特力材料 886-3-5753170

胜特力电子(上海) 86-21-54151736

胜特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

PowerMOS transistor

Logic level TOPFET

勝特力材料 886-3-5753170
 胜特力电子(上海) 86-21-54151736
 胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

BUK112-50GL

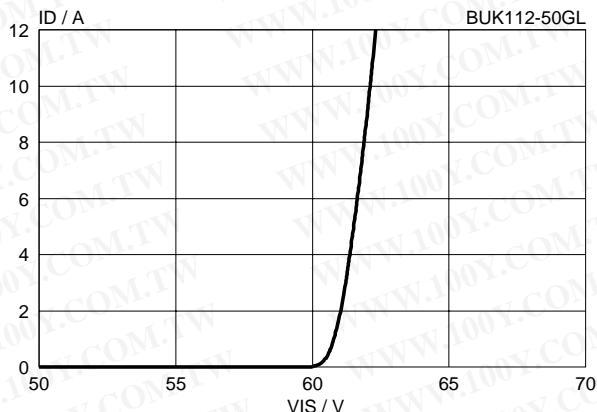


Fig.30. Typical clamping characteristics, 25°C.
 $I_D = f(V_{DS})$; conditions: $V_{IS} = 0$ V; $t_p \leq 50$ μ s

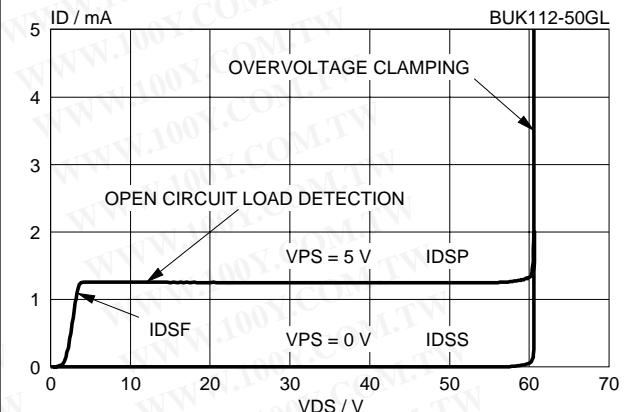


Fig.33. Typical off-state characteristics, $T_j = 25$ °C.
 $I_D = f(V_{DS})$; $V_{IS} = 0$ V; parameter V_{PS}

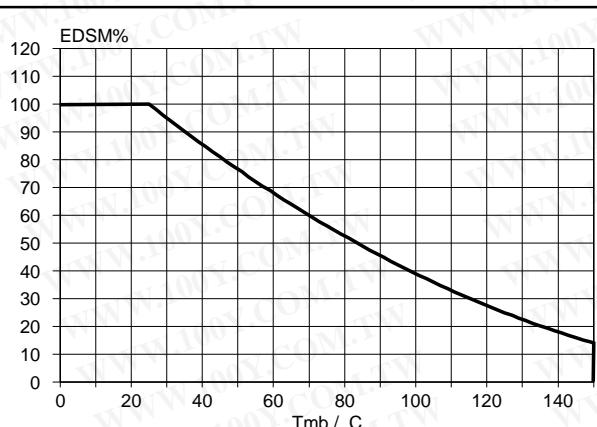


Fig.31. Normalised limiting clamping energy.
 $E_{DSM}\% = f(T_{mb})$; conditions: $I_D = 6$ A

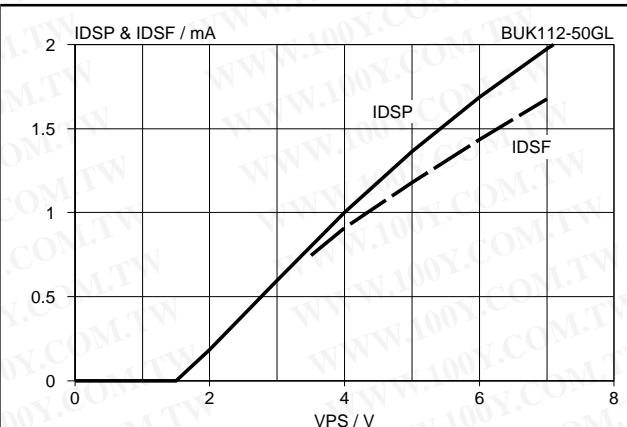


Fig.34. Typical open circuit load detect currents.
 I_{DSP} & $I_{DSF} = f(V_{PS})$; $V_{IS} = 0$ V; $V_{DS} \geq 5$ V; $T_j = 25$ °C

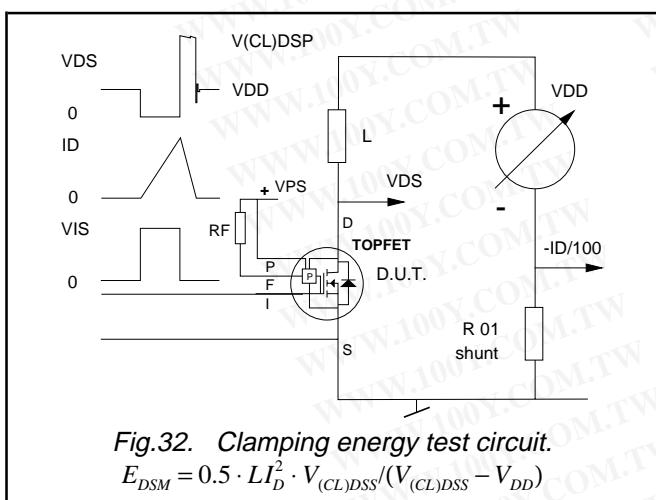


Fig.32. Clamping energy test circuit.
 $E_{DSM} = 0.5 \cdot L I_D^2 \cdot V_{(CL)DSS} / (V_{(CL)DSS} - V_{DD})$





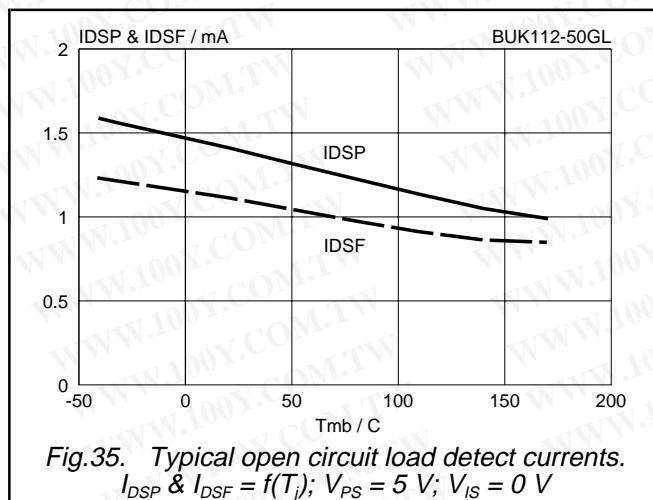


Fig.35. Typical open circuit load detect currents.
 I_{DSP} & $I_{DSF} = f(T_j)$; $V_{PS} = 5$ V; $V_{IS} = 0$ V

PowerMOS transistor

Logic level TOPFET

BUK112-50GL

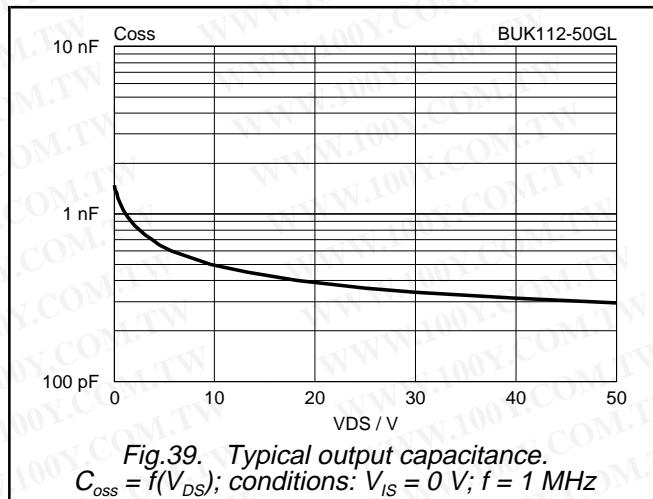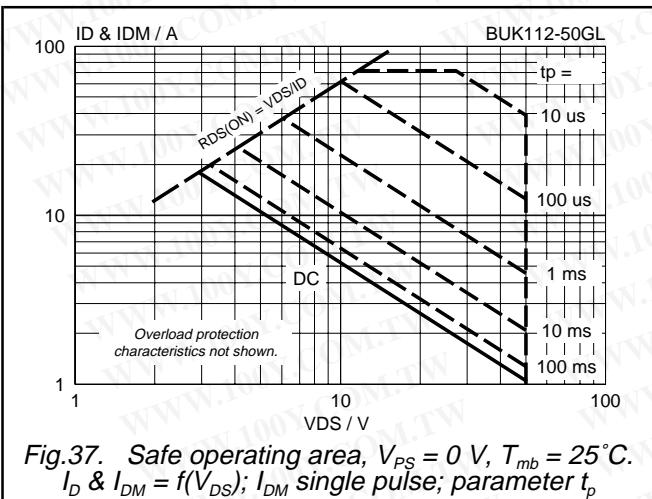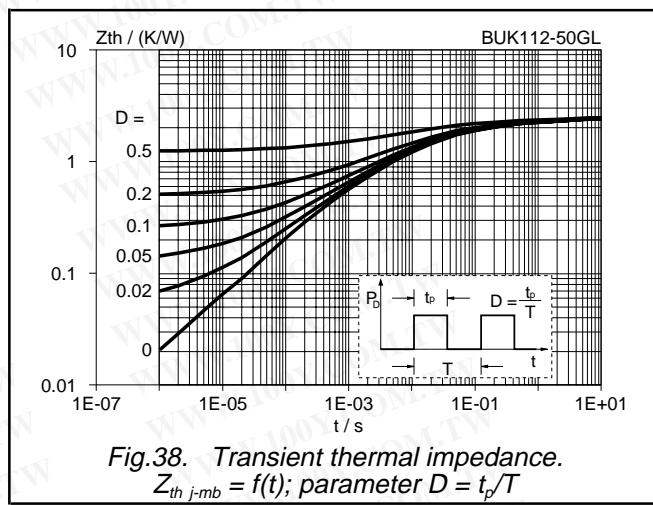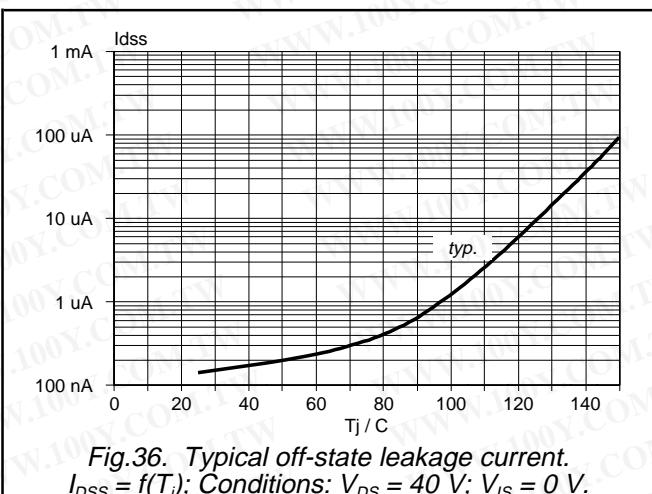


勝特力材料 886-3-5753170
 胜特力电子(上海) 86-21-54151736
 胜特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

PowerMOS transistor Logic level TOPFET

BUK112-50GL

APPLICATION INFORMATION

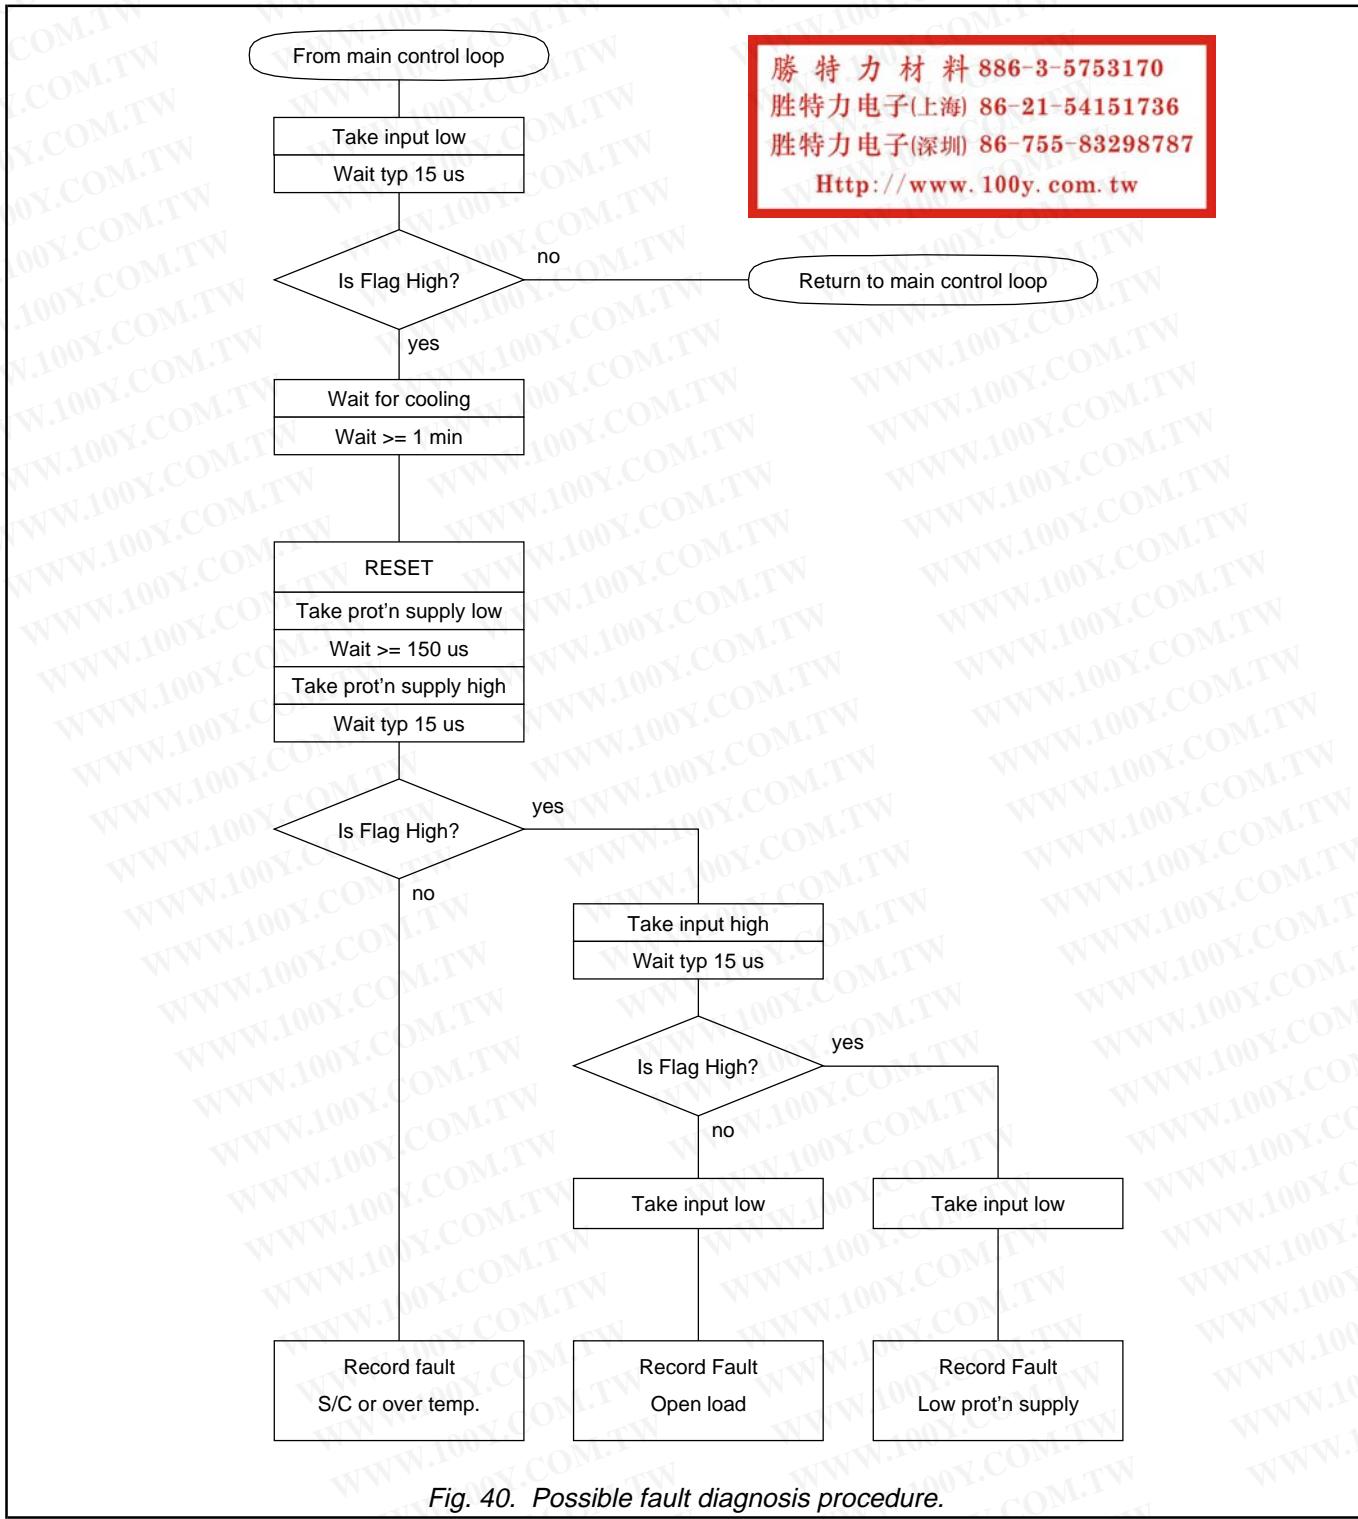



PowerMOS transistor Logic level TOPFET

BUK112-50GL

MECHANICAL DATA

Dimensions in mm

Net Mass: 2 g

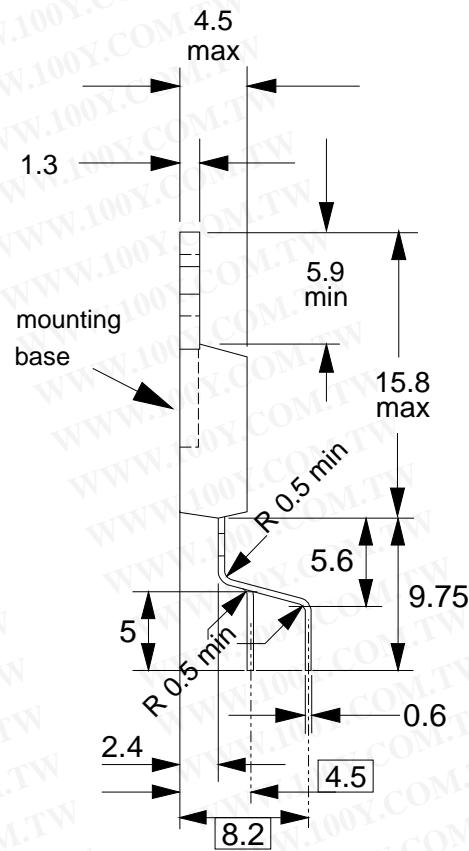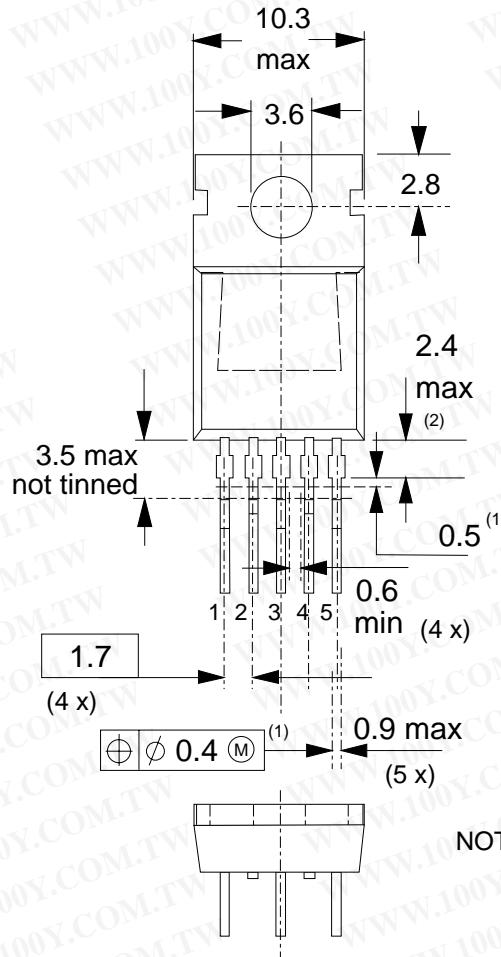

NOTES (1) positional accuracy of the terminals is controlled in this zone only.

(2) terminal dimensions in this zone are uncontrolled.

Fig.41. SOT263 leadform 263-01;
pin 3 connected to mounting base.

Note

1. Refer to mounting instructions for TO220 envelopes.
2. Epoxy meets UL94 V0 at 1/8".

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

**PowerMOS transistor
Logic level TOPFET****BUK112-50GL****DEFINITIONS**

Data sheet status	
Objective specification	This data sheet contains target or goal specifications for product development.
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.
Product specification	This data sheet contains final product specifications.
Limiting values	
Limiting values are given in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of this specification is not implied. Exposure to limiting values for extended periods may affect device reliability.	
Application information	
Where application information is given, it is advisory and does not form part of the specification.	
© Philips Electronics N.V. 1996	
All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.	
The information presented in this document does not form part of any quotation or contract, it is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent or other industrial or intellectual property rights.	

LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)