

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Specifications

Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C




Materials

Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0

P.B.T

Recommended P.C.Board

Hole Layout

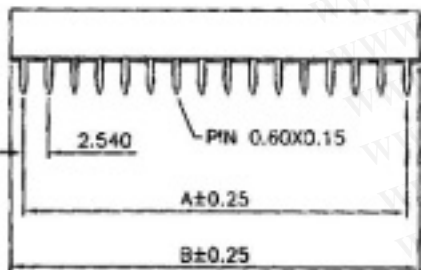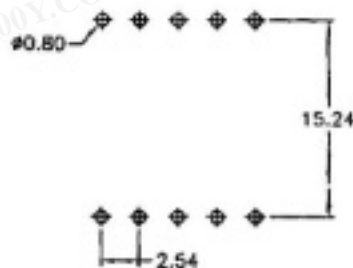

UNIT

SCALE

PART NAME

MM

2:1

2.54mm I.C. SOCKET DIP
Row Spacing: 15.24mm W/ Bar

制表日: 2002/05/09

DRAWING.

APPROVED

APPD.

CKD.

TOLERANCE

± 0.3

PART NO.

REV.

A