


# Ceramic Disc Capacitor

## Class 1 Temperature Compensation

### Features

- Linear Temperature coefficient of capacitance
- High Stability of capacitance
- Low loss at wide range of frequency

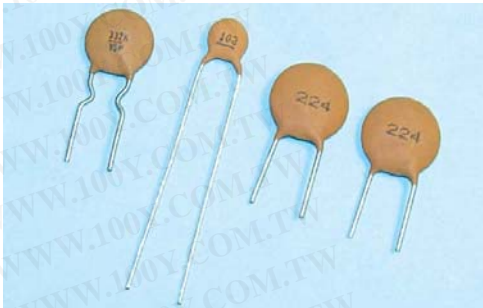

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

Specification	
Operating Temperature Range	-25°C to +85°C
Rated Working Voltage	DC 50V, 500V
Test Voltage	3 times of the rated voltage
Capacitance	Within the tolerance at 1MHz, 1±0.2 Vrms, 25°C
Q Factor	At 1Mhz: 1±0.2 Vrms, 25°C C > 30pF ..... Q > 1,000 C < 30pF ..... Q ≥ 400+20°C (C: Rated capacitance)
Insulation Resistance	10,000M ohm min.

Rated Volt. (VDC)	Temp. Char.	Capacitance		Dimensions (mm)		
		Range (pF)	Tolerance	D max	T max	F
50	CH 0±60 PPM/°C (NPO)	0.5 ~ 47	±0.5pF (under 10 pF)	5.5	3.5	5.0
		50 ~ 75		6.5		
		82 ~ 100		7.5		
		120 ~ 150	±5% & ±10% (Over 10 pF)	8.5		5.0, 10.0
		180 ~ 270		10.5		
		300 ~ 390		12.5		
50	SL +350 ~ -1000 PPM/°C	10 ~ 120	±5% & ±10%	5.5	3.5	5.0
		150 ~ 240		6.5		
		270 ~ 330		7.5		
		360 ~ 470		8.5		
		500 ~ 820		10.5		

## Class 2 High Dielectric Constant

### Features

- Large capacitance in small size
- Non liner temperature coefficient of capacitance

Specification	
Rated Working Voltage	DC 50V, 500V

Test Voltage 2.5 times of the rated voltage  
 Capacitance Within the tolerance at 1MHz,  $1 \pm 0.2$   
 $V_{rms}$ , 25°C  
 Dissipation Factor Y5P, Z5U :  $\tan \delta < 2.5\%$   
 Z5V :  $\tan \delta < 5\%$   
 Insulation Resistance 10,000M ohm or 200M ohm  $\mu F$ ,  
 whichever is the smaller

Rated Volt. (VDC)	Temp. Char.	Capacitance		Dimensions (mm)		
		Range (pF)	Tolerance	D max	T max	F
50	B $\pm 10\%$ (Y5P)	100 ~ 2000	$\pm 10\%$ & $\pm 20\%$	5.5	3.5	5.0
		2000 . 2700		6.5		
		3000 . 3300		7.5		
		3900 . 4700		8.5		
		5600 . 6800		10.5		
		10000 . 2200 .				
		3300 . 4700 .		5.5		
		5000 . 4600 .				
		6800 . 8200		6.5		
		10000 . 12000 .		7.5		
50	E $\pm 22 \sim 56\%$ (Z5U)	15000 . 18000 .	$\pm 20$ & $+80-20\%$	8.5	3.5	5.0
		20000 . 22000 .		10.5		
		4700 . 5000 .		5.5		
		10000 . 15000 .		6.5		
		18000 . 20000 .		7.5		
		20000 . 30000 .		8.5		
		33000 . 40000		10.5		
50	F $\pm 22 \sim 82\%$ (Z5V)	20000 . 20000 .	$+80-20\%$	7.5	3.5	5.0
		30000 . 33000 .		8.5		
		40000		10.5		

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

### Class 3 Semi Conductive Type

#### Features

- Linear Temperature coefficient of capacitance
- Stable capacitance change over the specified temperature
- Low loss at wide range of frequency
- Cost saving by replacing film capacitors.
- Ultra large capacitance in small size

Operating Temperature Range	-10°C to +85°C
Rated Working Voltage	DC 16V, 25V, 50V
Test Voltage	2 times of the rated voltage
Dissipation Factor	At 1Mhz: 0.1 Vrms, 25°C
Factor (tan δ)	
FY	16V 7.5%max
FY. RY	25/50 5%max
Insulation Resistance	(at 25°C)
	16V, 100M ohm μF or M ohm μf whichever is less
	25V/50V, 1000M ohm μF or 20 M ohm μF whichever is less

Rated Volt. (VDC)	Temp. Char.	Capacitance		Dimensions (mm)		
		Range (pF)	Tolerance	D max	T max	F
50	FY +22 ~ 82%	20000 ~ 100000	±20% & +80-20%	5.5	3.5	5.0
		20000 ~ 220000		10.5		
		22000		5.5		
		33000 ~ 100000		6.5		
50	(Y5V)	200000 ~ 220000	±20% & +80-20%	10.5	3.5	5.0
		22000		5.5		
		33000 ~ 47000		6.5		
		100000		5.5		
50	RY ±15% (Y5R)	6800 ~ 10000	±10 & ±20%	5.5	3.5	5.0
		15000 ~ 22000		6.5		
		33000 ~ 47000		7.5		
		68000 ~ 100000		8.5		
50		68000 ~ 10000	±10 & ±20%	5.5	3.5	5.0
		15000 ~ 22000		6.5		
		33000 ~ 47000		8.5		
		68000		10.5		

勝 特 力 材 料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)