


Pin Type	Interface Dim L	Pin Type	REV	MODIFICATION	DATE	DRAW
Detect	3.5 mm	25,26	B	EN-02-0130	1/16	JACK
General	4.25 mm	All Other Pins	C	EN-02-0318	3/18	JACK
Power	5.0 mm	1,13,38,50	D	EN-02-0330	3/28	JACK

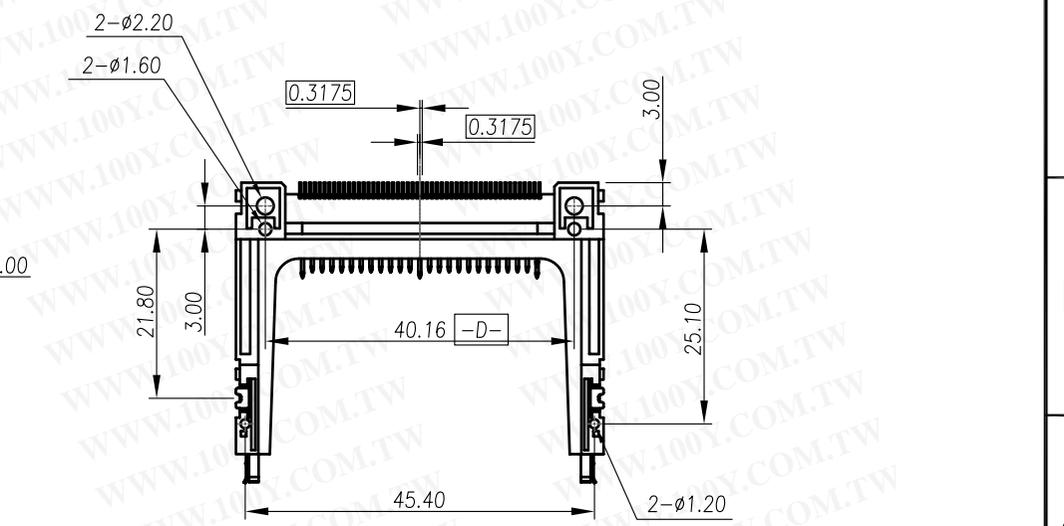

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


Ordering Information:

CFC M D - 3 50 XX W 1 1 0

Pin No. TYPE 2 Color: W-White. 1 : REVERSE TYPE


Contact Area Plating: STAND OFF 1 : 2mm
15--15U" Gold Plating.

DIMENSION IN mm [Inch]		PROD. SPEC. SP0025	TITLE	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PKG. SPEC. PPP-CFC-003	CF TYPE2 ,50PIN SMT REVERSE TYPE	CUSTOMER DRAWING
.X±0.30	X.*± 1*	APPROVE	FILE NO. KFP-025	DWG NO. CFCMD-350XXW110
.XX±0.20	.X.*± 0.5*	CHECK	SIZE A4	PROJ. SHEET 1 / 2
.XXX±0.10	.XX.*± 0.25*	DRAW	SCALE 1:1	REV D

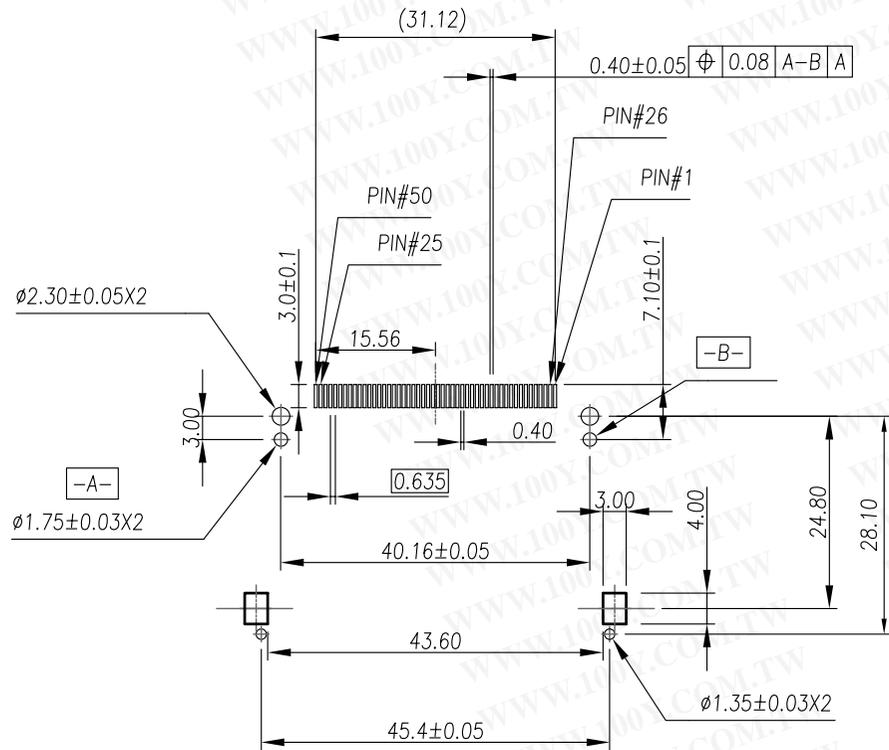

P.C.B Layout

REV	MODIFICATION	DATE	DRAW
B	EN-02-0130	1/16	JACK
C	EN-02-0318	3/18	JACK
D	EN-02-0330	3/28	JACK

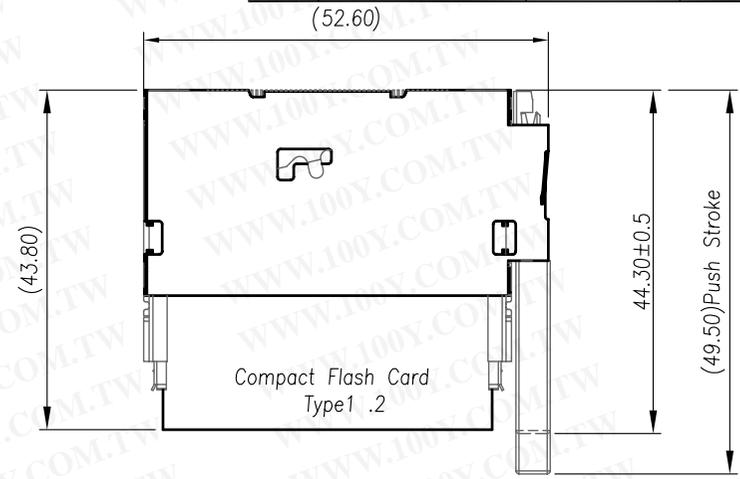

Compact Flash Card
Type1 .2

Header With Ejector

SPECIFICATIONS:

- HOUSING : High Temperature Plastic, UL 94V-0
- CONTACT : Copper Alloys
- VOLTAGE RATING : 100VAC
- CURRENT RATING : 0.5A
- CONTACT RESISTANCE:40 m Ohm max.
- INSULATION RESISTANCE:1000M Ohm max.
- DIELECTRIC STRENGTH : 500VAC/1min
- OPERATION TEMPERATURE : -40°C~85°C

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Ordering Information:

CFC M D - 3 50 XX W 1 1 0
 TYPE 2 Pin No. Color: W-White. 1 : REVERSE TYPE
 STAND OFF 1 : 2mm

Contact Area Plating: 15--15U" Gold Plating.

DIMENSION IN mm [Inch]		PROD. SPEC. SP0025	TITLE	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PKG. SPEC. PPP-CFC-003	CF TYPE2 ,50PIN SMT REVERSE TYPE	CUSTOMER DRAWING
.X±0.30	X.*± 1*	APPROVE	FILE NO. KFP-025	DWG NO. CFCMD-350XXW110
.XX±0.20	.X.*± 0.5*	CHECK	SIZE A4	PROJ. SHEET 2 / 2
.XXX±0.10	.XX.*± 0.25*	DRAW	SCALE 1:1	REV D