



NO.CHM-6021-#

Female Plug

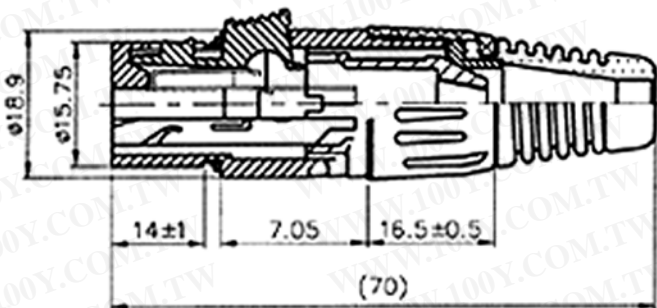

NO.CHM-6021A-#

Male Plug

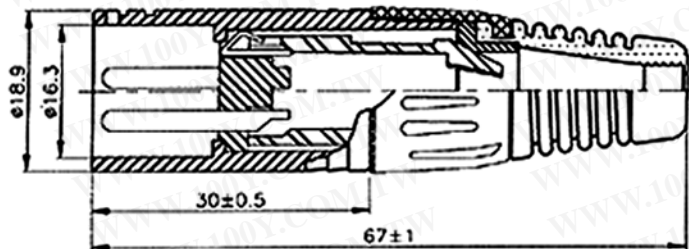

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

General Performance Characteristics

❖ Number of Contacts	3	4	5	6	7
Contact Arrangement Configuration					
Rated Current / Voltage (AC)	10A/133V	10A/133V	7.5A/133V	7.5A/133V	5A/133V
Insulation Resistance	2000 M Ω min. at 500VDC				
Contact Resistance (m Ω max.) at DC1A	10	13	15	15	15
Wire Accommodation Reference AWG	#14	#16	#18	#18	#20
Stranded Wire O. D. (max.)	2.1mm	1.6mm	1.4mm	1.4mm	1.0mm
Wire Cross Section (max.)	2.0mm ²	1.4mm ²	0.9mm ²	0.9mm ²	0.5mm ²