



# CCD Monochrome Video Camera Specifications

## CS8430i (EIA)

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

### Contents

1. PRODUCT DESCRIPTION .....	1
2. FEATURES .....	1
3. CONFIGURATION.....	1
4. SPECIFICATION.....	2
5. APPEARANCE.....	5

**TOSHIBA TELI CORPORATION**

## **1. PRODUCT DESCRIPTION**

Model CS8430i is a miniature camera featuring compact and light eight. The CS8430i camera is designed mainly for factory automation, machine vision, and image measurement application.

## **2. FEATURES**

- \* Compact and light weight
- \* Available External sync-operation
- \* Equipped with an electronic shutter for fast moving subjects for better definition picture.

## **3. CONFIGURATION**


- (1) Camera body ..... 1
- (2) Accessory
  - Operation Manual(English) ..... 1
  - Operation Manual(Japanese) ..... 1

勝特力材料 886-3-5753170  
胜特力电子(上海) 86-21-54151736  
胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## 4.SPECIFICATION

(1) TV system	Based on EIA standard
(2) Image sensor	Interline CCD
Active pixel	768(H) × 494(V)
Chip size	6.35 μm × 7.4 μm
Active image area	4.8mm(H) × 3.6mm(V) (equivalent to Type 1/3 normal optical image size respectively)
(3) Number of scanning lines	525 lines
(4) Scanning system	2:1 interlace
(5) Sync system	Internal/External(Automatic change over)
(6) Scanning frequencies	
Horizontal drive(H)	15.734 kHz
Vertical drive(V)	59.94Hz
(7) Aspect ratio	4 : 3
(8) Sensitivity	Standard : 100 lx at F5.6, 3200K, Gain : FIX, Gamma=1.0 50% Output : 0.8 lx at F1.4, Gain : max Minimum : 0.3 lx at F1.4, Gain : max, Gamma=1.0,Output:25%
(9) Video output	VS(Video + SYNC) : 1.0V(p-p)/75 Ω
(10) Resolution	Horizontal direction : 570 TV lines Vertical direction : 485 TV lines (350 TV lines)
(11) S/N(luminance)	56dB(p-p)/rms or more(Gain : FIX, Gamma=1.0)
(12) Gamma correction	1.0
(13) Sensitivity setting	The following modes can be set using the internal switch. (Factory setting: MANU) FIX(FIX Gain) : Standard sensitivity setting. MGC(Manual Gain Control) : Sensitivity can be set manually.
(14) White clip	Clip level should be set for 1.0V at factory, excluding SYNC tip.
(15) Input signal	
*External sync pulses	
HD,VD and SYNC	4.0 ± 2.0 V(p-p)
VS	1.0 V(p-p)(SYNC 0.3V(p-p))
Input impedance	75 Ω /HIGH selection can be made using the internal switch. (Factory setting: HIGH)
Pulse polarity	Negative polarity
Pulse width	HD : 6.4 ± 3 μsec VD : 150 to 800 μsec
Frequency	Horizontal(f <sub>H</sub> ) : 15.734 kHz ± 2% Vertical(f <sub>V</sub> ) : 2f <sub>H</sub> /525
Number of scanning lines	525 lines

Phase between HD/VD The phase relation between HD and VD should be as shown below.

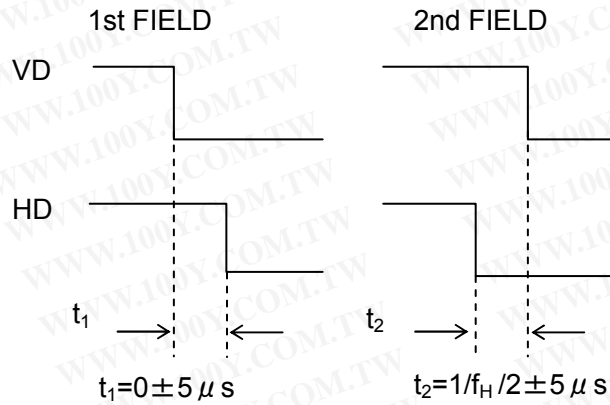

(16) Output signal

\*HD/VD pulses

Pulse level 4.5V(p-p) / not impedance  
 Interlace 2:1  
 Polarity Negative  
 Pulse width HD :  $6.36 \pm 0.1 \mu sec$   
 VD :  $572 \pm 1 \mu sec$   
 Frequency Horizontal( $f_H$ ) :  $15.73426 kHz \pm 100ppm$   
 Vertical( $f_V$ ) :  $2f_H/525$   
 Number of scanning lines 525 lines

(17) Electronic shutter


ON/OFF selectable Shutter speed  
 1/60, 1/100, 1/250, 1/500, 1/1000, 1/2000, 1/4000, 1/10000 sec.

(18) CCD operation mode

Field or frame store mode can be selected as necessary. (initially preset frame mode in factory)

(19) Spectral response

Refer below.

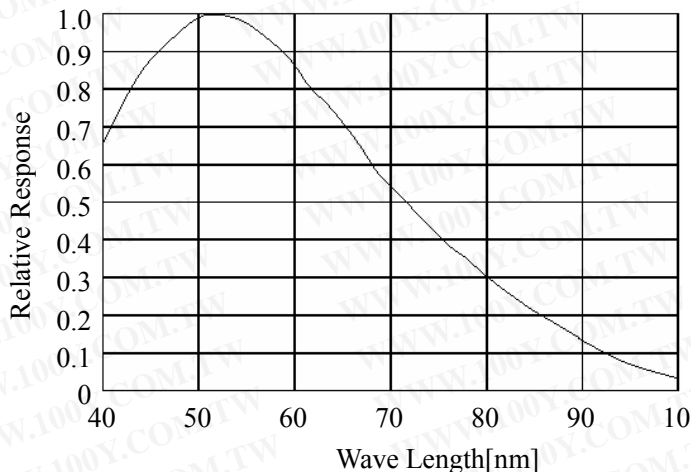

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

D4134626A

- (20) Power source DC12V  $\pm$  10% within 10mV(p-p) ripple
- (21) Power consumption approx. 210mA
- (22) Ambient condition
- Temperature 0°C to + 40°C
- Humidity less than 90%
- (23) Lens mount C-mount
- (24) Dimensions 31(W)  $\times$  29(H)  $\times$  70(D) mm refer to page 5
- (25) Weight approx. 80 g
- (26) DC IN/SYNC connector pin assignment

Camera connector : HR10A-10P-12P (Maker : Hirose denki)

Pin No.	External synchronization		Internal synchronization
	HD and VD	VS/SYNC	
1	GND	GND	GND
2	+12V	+12V	+12V
3	Video output (GND)	Video output (GND)	Video output (GND)
4	Video output (signal)	Video output (signal)	Video output(signal)
5	HD input (GND)		HD output (GND)
6	HD input (signal)		HD output (signal)
7	VD input (signal)	VS/SYNC input (signal)	VD output (signal)
8			
9			
10	GND	GND	GND
11	+12V	+12V	+12V
12	VD input (GND)	VS/SYNC (GND)	VD output (GND)


\* HD, VD output is available for internal switch selection.

\* Design and specifications are subject to change without notice.

**勝特力材料 886-3-5753170**  
**勝特力电子(上海) 86-21-54151736**  
**勝特力电子(深圳) 86-755-83298787**  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## 5. APPEARANCES

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

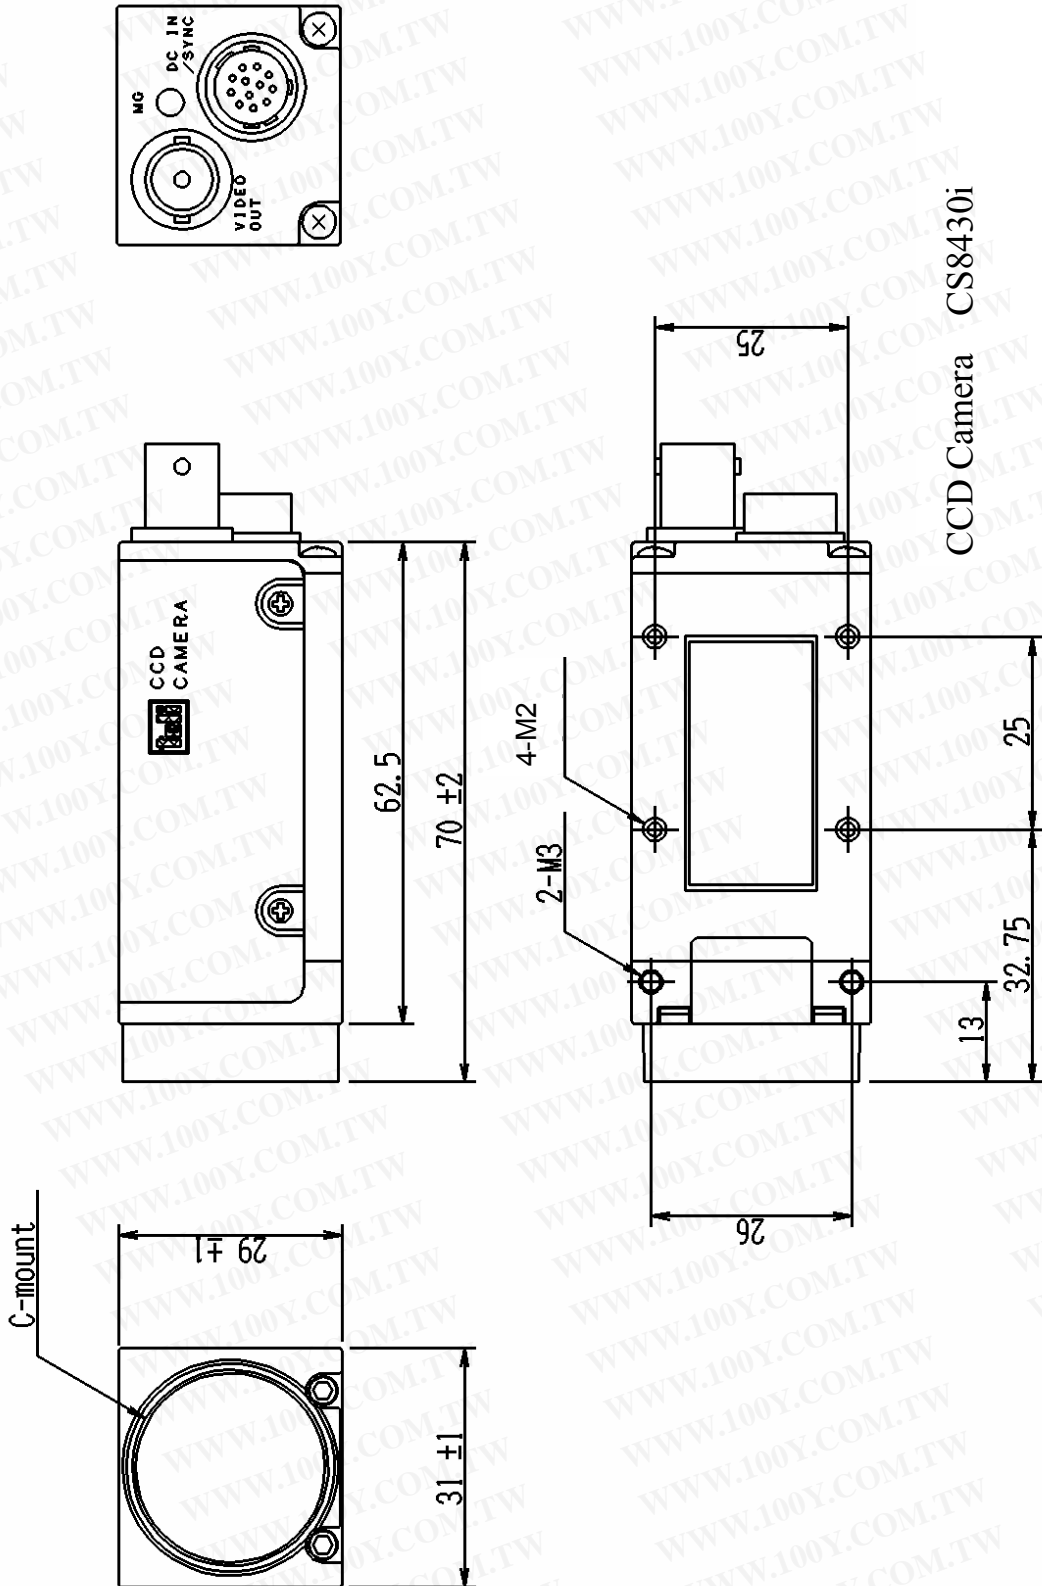



## TOSHIBA TELI CORPORATION

---

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)