


D-SUB Standard Right Angle Machine Pin Female

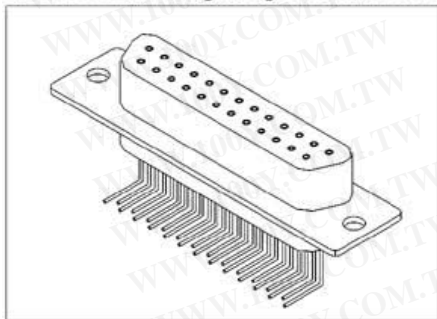

POSITION	A	B	C	D
9	16.30	24.99	30.81	19.28
15	24.60	33.32	39.14	27.51
25	38.30	47.04	53.04	41.30
37	54.80	63.50	69.32	57.70
50	52.43	61.11	66.90	55.30

MATERIAL:

Housing : 30% Glass filled PBT UL94V-0.

Contacts: Brass.

Electrical Characteristics:

Current Rating: 1 AMP

Insulator Resistance: 5000MΩ min.
at DC 500V.

Contact Resistance : 20mΩ max. at DC 100mA.

Operating Temperature : -55°C~+105°C.

ORDERING INFORMATION:

S: Machine Pin Female

No. of Positions

F1:7.2mm





F2:9.4mm

勝特力材料 886-3-5753170


勝特力电子(上海) 86-21-54151736

勝特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

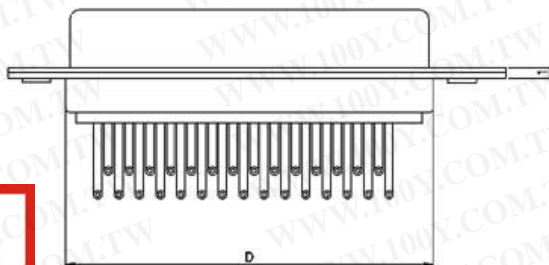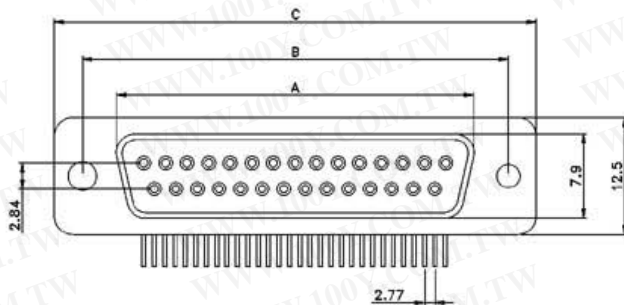

	F1	F2
X	7.2	9.4



UNIT : mm