


2.54mm IDC Card Edge Connector




勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

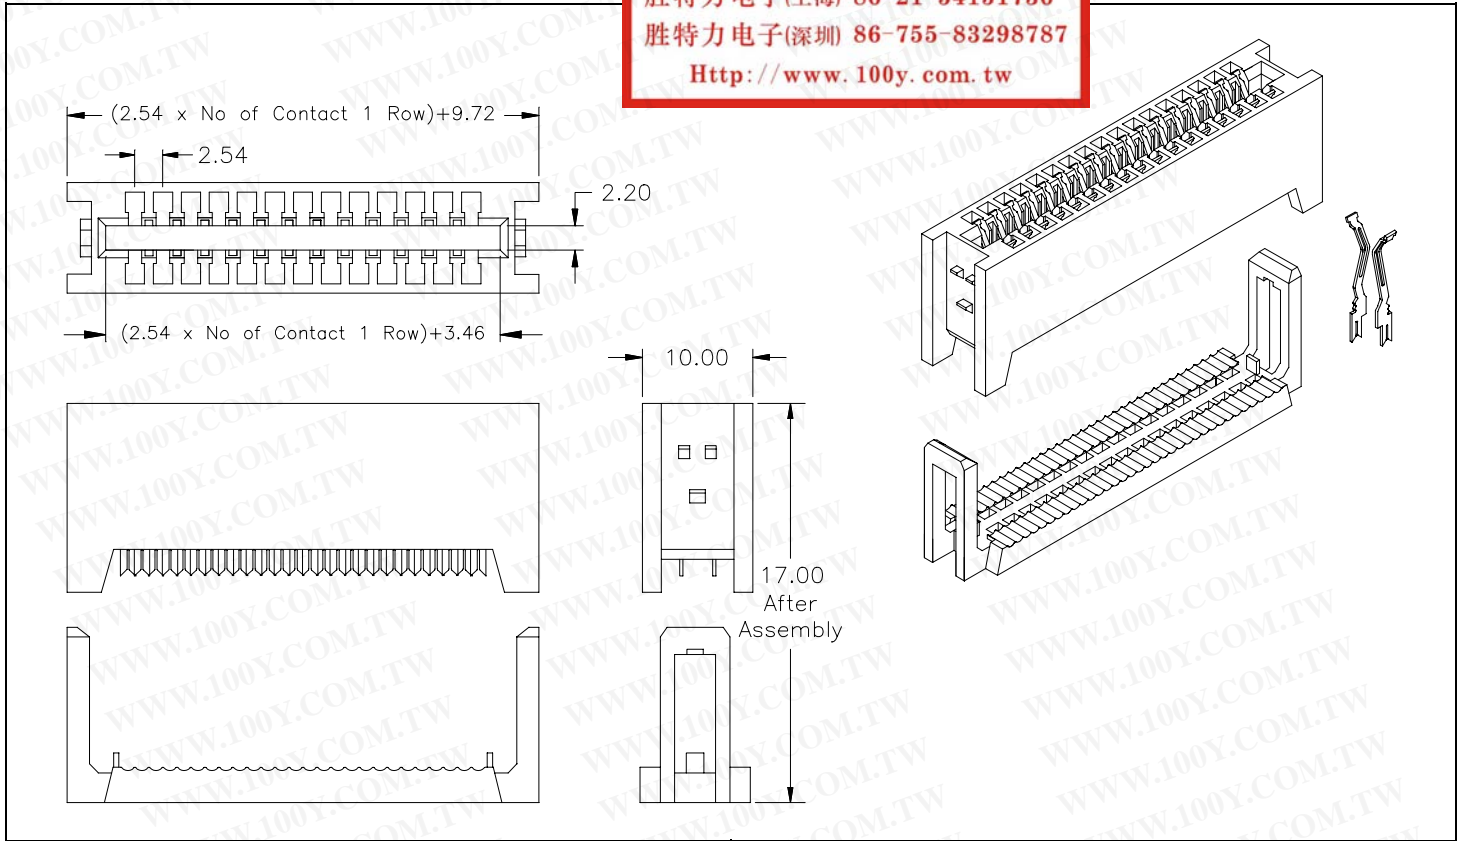

SPECIFICATIONS

Current rating	3 A
Insulator resistance	5000 MΩ min.
Contact resistance	20 mΩ max.
Dielectric withstanding	AC 500 V
Operating temperature	- 40° to +105°C
Contact material	Phosphor Bronze
Insulator material	P.B.T. UL 94 V-0

Recommended PCB dimensions

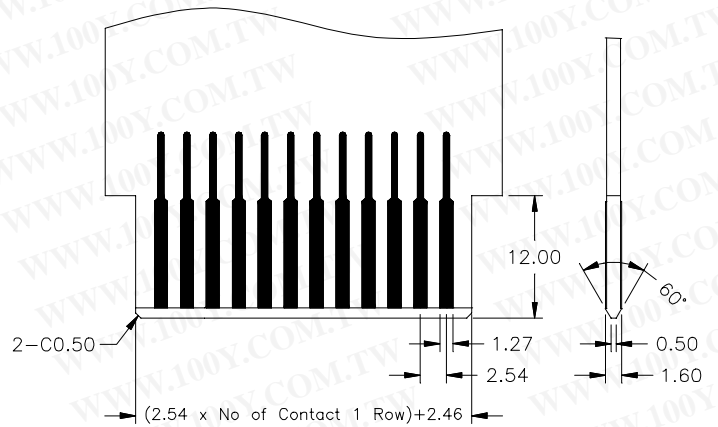

APPLICATION AND FEATURES

- Hi-rel dual beam contact for reliable PCB connections
- Accepts PCB thickness of 1.40 to 1.60mm
- Insulation displacement termination for 1.27mm flat cable

How to order

IDC - xxx - W100 - 01

Nbr of contacts

010; 014; 016; 020
026; 034; 040; 050
060; 062; 064

Plating

01 = tin/gold
 others on request