





MATERIAL

Insulator: Polyphenylene Sulphide(PPS) UL94V-0
 Color: Black
 Contact: Inner Clip-Beryllium Copper .Gold Plating
 Outer Sleeve-Brass. Tin Plating

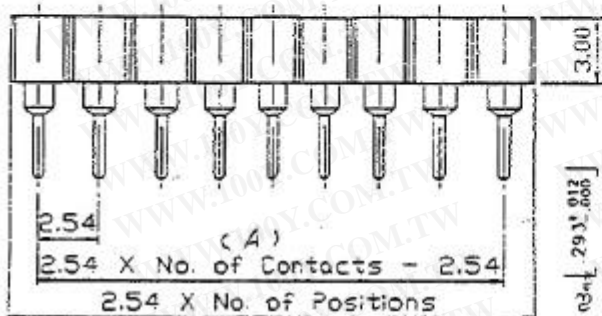

PIN	DIM.(mm)		PIN	DIM.(mm)	
	A	B		A	B
1		2.54	21	50.80	53.34
2	2.54	5.08	22	53.34	55.88
3	5.08	7.62	23	55.88	58.42
4	7.62	10.16	24	58.42	60.96
5	10.16	12.70	25	60.96	63.50
6	12.70	15.24	26	63.50	66.04
7	15.24	17.78	27	66.04	68.58
8	17.78	20.32	28	68.58	71.12
9	20.32	22.86	29	71.12	73.66
10	22.86	25.40	30	73.66	76.20
11	25.40	27.94	31	76.20	78.74
12	27.94	30.48	32	78.74	81.28
13	30.48	33.02	33	81.28	83.82
14	33.02	35.56	34	83.82	86.36
15	35.56	38.10	35	86.36	88.90
16	38.10	40.64	36	88.90	91.44
17	40.64	43.18	37	91.44	93.98
18	43.18	45.72	38	93.98	96.52
19	45.72	48.26	39	96.52	99.06
20	48.26	50.80	40	99.06	101.60



勝特力材料 886-3-5753170
 胜特力电子(上海) 86-21-54151736
 胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

UNIT MM (INCH)		SCALE		PART NAME	
		2:1		2.54mm SIP Socket Machine Pin /Dual Row	
APPD.	CKD.	TOLERANCE		PART NO.	REV.
		± 0.3			

制表日: 2003/08/26

DRAWING. APPROVED
Jane

1 2 3 4 5 6 7 8