



勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

- Triac Output
- Printed Circuit Board Mount
- Internal Snubber
- Zero Voltage Switching

The D2W Series features an epoxy-coated package that provides exceptional environmental protection. Pinouts are compatible with Series 6 and OAC type I/O modules.

Manufactured in Crydom's ISO 9001 Certified facility for optimum product performance and reliability.

CURRENT DERATING CURVE

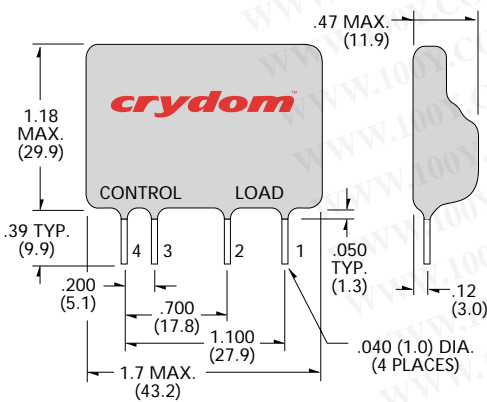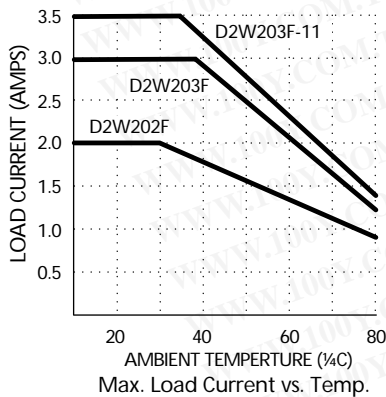

PIN 1: AC LOAD
 PIN 2: AC LOAD
 PIN 3: +DC CONTROL
 PIN 4: -DC CONTROL

All dimensions are in inches (millimeters)

MODEL NO.	D2W202F	D2W203F	D2W203F-11
INPUT SPECIFICATIONS ①			
Control Voltage Range	3-32 Vdc	3-32 Vdc	3-32 Vdc
Nominal Input Impedance	1500 Ohm	1500 Ohm	1500 Ohm
Typical Input Current @ 5 Vdc	3.0 mA _{dc}	3.0 mA _{dc}	3.0 mA _{dc}
Must Turn On Voltage	3.0 Vdc	3.0 Vdc	3.0 Vdc
Must Turn Off Voltage	1.0 Vdc	1.0 Vdc	1.0 Vdc

OUTPUT SPECIFICATIONS ①			
Operating Voltage Range (47-63 Hz)	24-280 Vrms	24-280 Vrms	24-280 Vrms
Load Current Range	.06-2.0 Arms	.06-3.0 Arms	.06-3.5 Arms
Transient Over-Voltage	600 Vpk	600 Vpk	600 Vpk
Max. Surge Current, (16.6ms)	28 Apk	70 Apk	80 Apk
Min. Off-State dv/dt @ Max. Rated Voltage ③	200 V/μsec	200 V/μsec	200 V/μsec
Max. Off-State Leakage @ Rated Voltage	8 mA _{Arms}	8 mA _{Arms}	8 mA _{Arms}
Max. On-State Voltage Drop @ Rated Current	1.4 Vpk	1.4 Vpk	1.4 Vpk
Max. Turn-On Time	1/2 cycle	1/2 cycle	1/2 cycle
Max. Turn-Off Time	1/2 cycle	1/2 cycle	1/2 cycle
Power Factor (Min.) With Max. Load	0.5	0.5	0.5

GENERAL SPECIFICATIONS			
Dielectric Strength ②	4000 Vrms		
Insulation Resistance (Min.) @ 500 Vdc ②	10 ⁹ Ohm		
Max. Capacitance	10 pF		
Ambient Operating Temperature Range	-30 to 80¼C		
Ambient Storage Temperature Range	-30 to 125¼C		

MECHANICAL SPECIFICATIONS			
Weight: (typical)	0.6 oz. (17 g)		
Encapsulation:	Thermally Conductive Epoxy		

© 2003 CRYDOM CORP, Specifications subject to change without notice.

- GENERAL NOTES**
- ① All parameters at 25°C unless otherwise specified.
 - ② Dielectric and insulation resistance are measured between input and output.
 - ③ Off-State dv/dt test method per EIA/NARM standard RS-443.

APPROVALS

UL E116950
 CSA LR81689

