

DIN TYPE(3 ROW)/歐式插座



Material:

Insulator: Glass-filled thermoplastic PBT UL94V-0 rates

Contacts: Male-Brass / Female-Phosphor Bronze

Plating: full gold or selected gold in mating area.

100u"min.tin-lead on termination area.

with entire contact under-plated 50u"min. Nickel

Electrical:

Contact Resistance: 30 milliohms Max at 1 AMP DC


Insulator Resistance: 1000 magohms at 500 VDC

Dielectric Withstanding Voltage: 1000 VAC/rms 60Hz For 1 minute

Current Rating: 2 AMP

Volatge Rating: 250 VAC/rms 60Hz

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

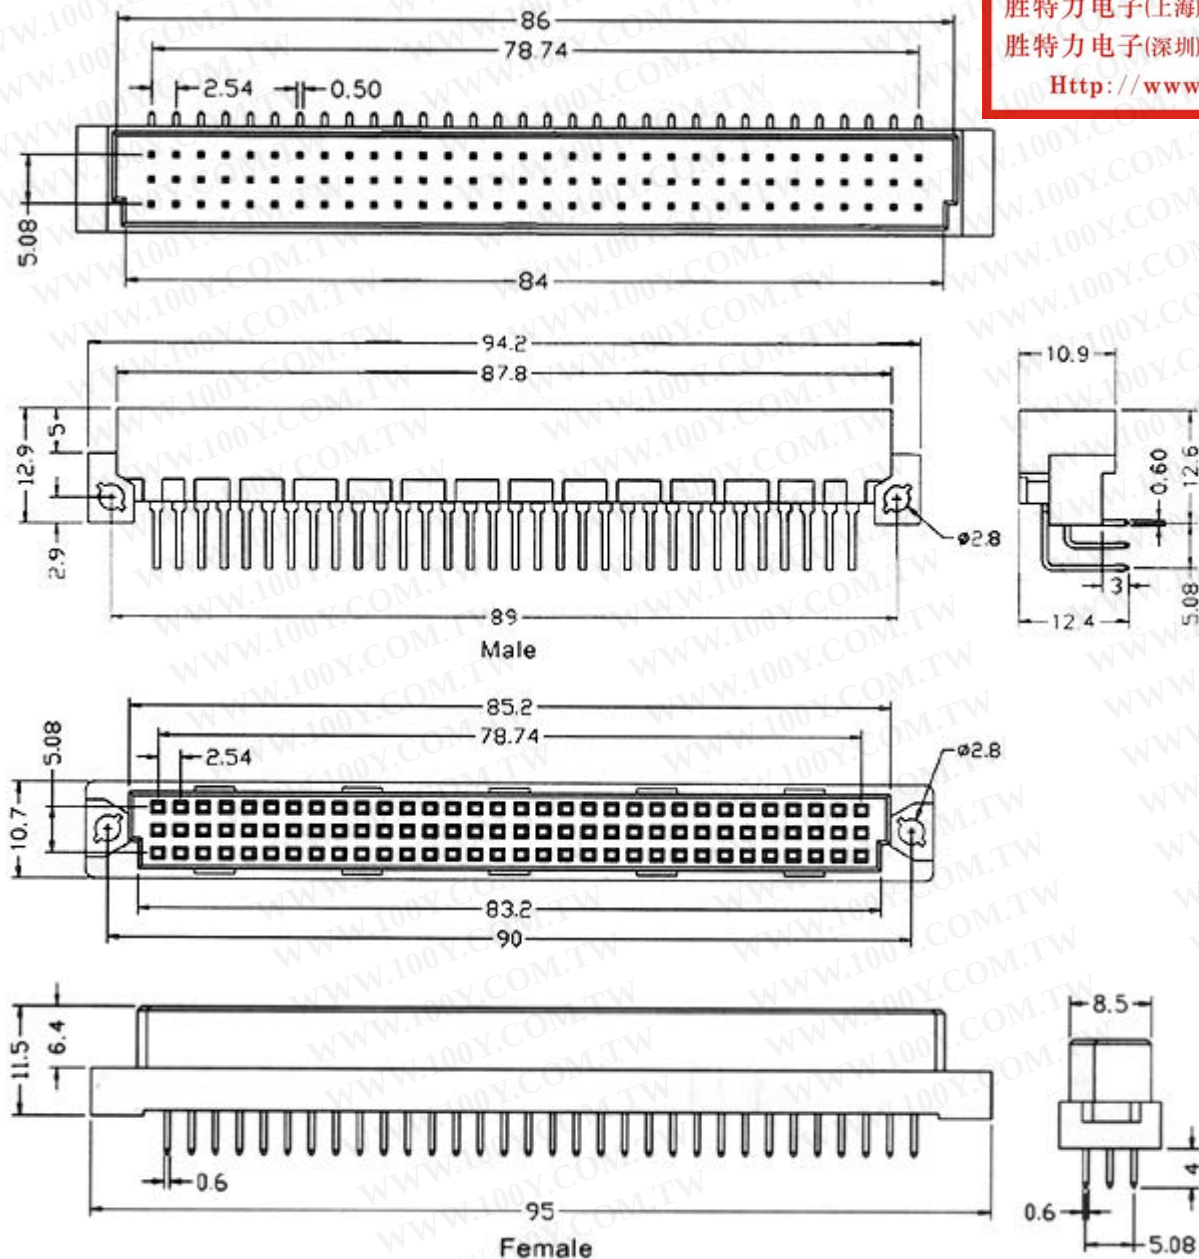

Pitch	Positions	Xlength	1	2	W1	W2
2.54mm	96	Male	3.0			
	64					
5.08mm	48	Female	4.0		13.0	17.0
	32					