


DIN41612 HALF R TYPE MALE (3ROW 180°)

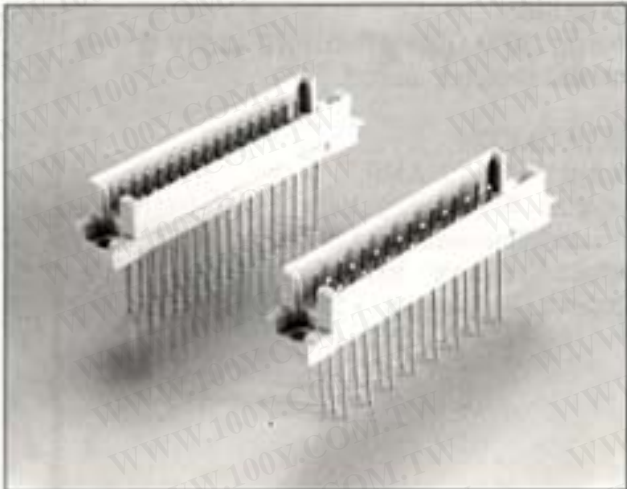





MATERIAL

- *Housing : 30% Glass Filled PBT UL94V-0,
- *Contact : Brass.

SPECIFICATION

- *Current Rating : 2 AMP.
- *Dielectric Withstanding Voltage : AC 1000V For 1 minute.
- *Insulator Resistance : 1000M Ω min. at DC 500V.
- *Contact Resistance : 30m Ω max. at DC 100mA.
- *Operation Temperature : - 55°C to + 105°C.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

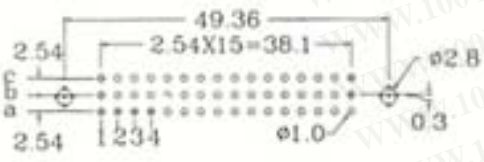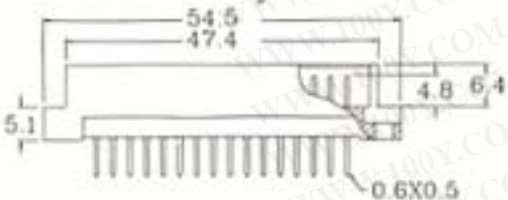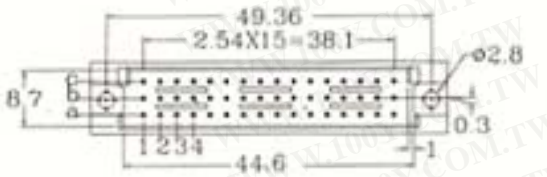

P.C. Board Layout

UNIT : mm

X length (PIN CODE #)	1	2	3	4
	4.0	13	2.5	17
Position	Rows with Contacts	Contact Arrange		
48	a b c			
32	a - c			
16	a - -			
24	a b c			
16	a - c			
08	a - -			