

# BOX HEADER 2.0mm SMD

## MATERIAL

Insulator: NYLON-6T G.F

Contact Pin: Brass Square Pin

Plated: Gold plated

Tin plated

勝特力材料 886-3-5753170

勝特力电子(上海) 86-21-54151736

勝特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)


## SPECIFICATION

Current Rate: 1 AMP

Insulation Resistance: 5000M  $\Omega$  Min at DC 500V

Contact Resistance 20m $\Omega$  Max at dc 100mA

Operation Temperature: -55°C ~ +105°C

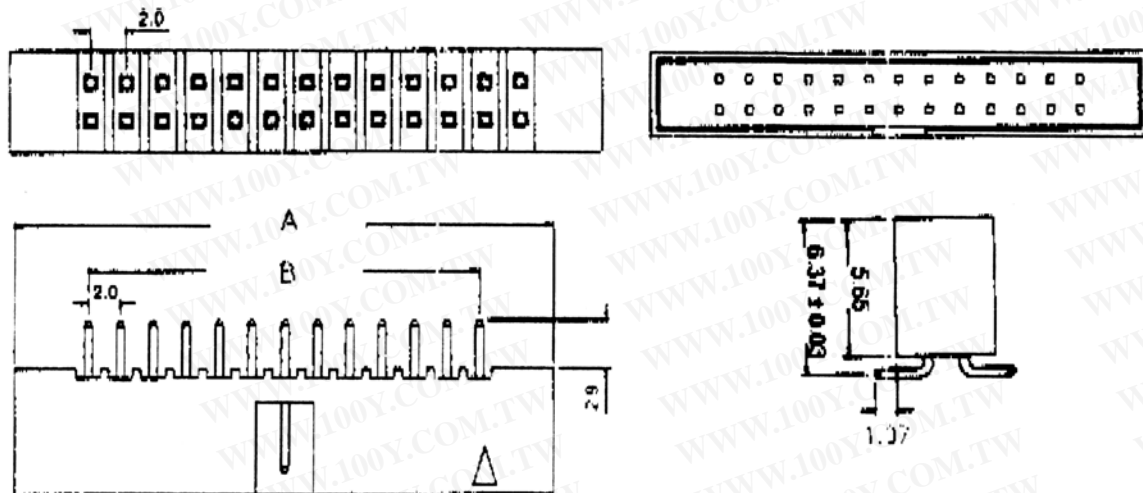

SMT

PIN	A	B
10	17.05	8.00
12	19.03	10.00
20	27.14	18.00
26	33.09	24.00
40	47.26	38.00
44	51.25	42.00
50	57.29	48.00