

BOX HEADER 2.0mm


MATERIAL

Insulator: NYLON-6T G.F
 Contact Pin: Brass Square Pin
 Plated: Gold plated
 Tin plated

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

SPECIFICATION

Current Rate: 1 AMP
 Insulation Resistance: 5000M Ω Min at DC 500V
 Contact Resistance 20m Ω Max at dc 100mA
 Operation Temperature: -55 $^{\circ}$ C ~ +105 $^{\circ}$ C

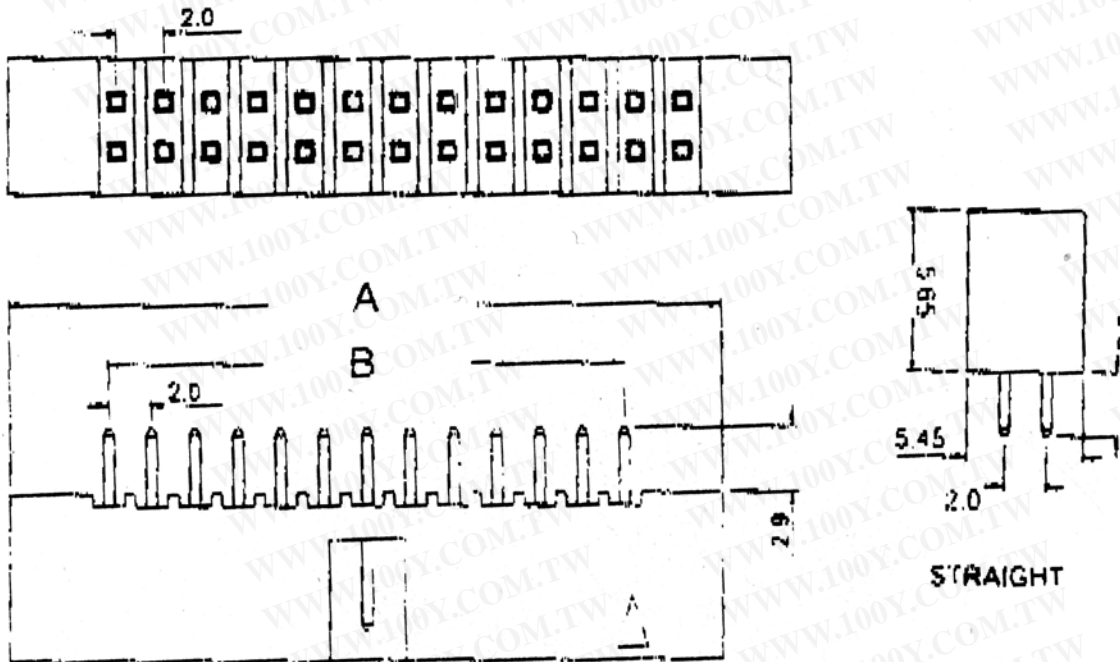

PIN	A	B
10	17.05	8.00
12	19.03	10.00
20	27.14	18.00
26	33.09	24.00
40	47.26	38.00
44	51.25	42.00
50	57.29	48.00