

- Plug-in output relay for AC/DC loads
- 1,2 A continuous current, 8 A/10 ms
- 0...240 VAC nominal load voltage
- Integrated status LED
- Works correctly from zero load upwards
- For resistive and inductive loads
- Immune to disturbances on signal lines
- Shielded signal cabling not required
- cULus tested (UL and CSA)
- CE (EMC and LVD tested)

勝特力材料 886-3-5753170
勝特力電子(上海) 86-21-54151736
勝特力電子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Input voltage	nominal	24 VDC
Input current at	typical	12 mA
nominal voltage	maximum	15 mA
Input voltage	minimum	18 VDC
range (abs.)	maximum	32 VDC
Input impedance	typical	2 k Ω
Switch-on voltage	typical	16 VDC
	maximum	18 VDC
Switch-off voltage	typical	14 VDC
	minimum	12 VDC

Load voltage	minimum	0 VAC/VDC
	nominal	240 VAC/250 VDC
(absolute)	maximum	265 VAC/300 VDC
Load current	maximum	1,2 A
Load current 10 ms	maximum	8 A
Voltage drop at max. load	typical	1,5 V
Switch-on delay	typical	0,3 ms
	maximum	0,5 ms
Switch-off delay	typical	0,3 ms
	maximum	0,5 ms
Inductive load, cos ϕ		0,3...1/240 VAC 1,2 A

Breakdown voltage	minimum	4000 VAC rms
Resistance	minimum	$10^{10} \Omega$
Material of casing	thermoplastic	UL 94 V-0
Weight	typical	40 g
Air/creepage distance	minimum	8 mm
Capacitance I/O	typical	3 pF

Technical drawing of the DELCON 1000Y connector, showing side and front views with dimensions.

Side View Dimensions:

- Overall height: 47
- Width of the top section: 12,5
- Height of the bottom section: 5,08

Front View Dimensions:

- Overall width: 43
- Height of the top section: 7,62
- Height of the bottom section: 5,08
- Height of the bottom section (with pin): 7,62
- Height of the bottom section (with pin): 10,16
- Height of the bottom section (with pin): 6

Connector Details:

- Brand: DELCON
- Made in Finland
- Website: www.delcon.fi
- CE Marking
- UL Marking (C-ULUS)
- Pin numbers: 1, 2, 3, 4, 5

1


Temperature derating

Allowed load is derated to 1/3 linearly from +30 °C to +70 °C ambient temperature. When relays are mounted together as a bank the maximum load current for long period of time should be restricted in total to 50 % of the current from the curve. I.e. all relays at 50 % load continuously or 50 % of the relays at 100 % load continuously or all relays at 100 % load 50 % of the time. This restriction does not apply if there is at least 12,5 mm gap between relays.

Temperature

range:

Storage: -40 °C...+70 °C
Operation: -25 °C...+70 °C

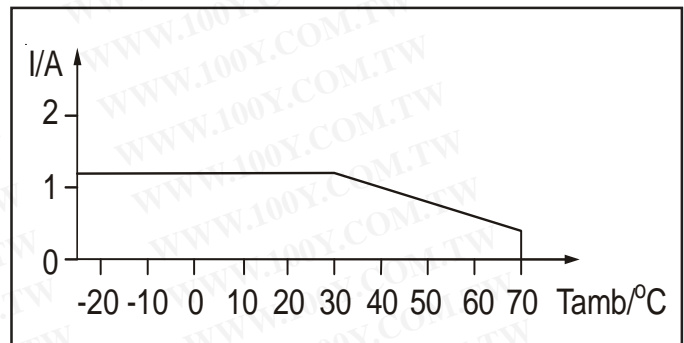

Derating curve for the relay.

Derating when switching inductive loads

This relay is ment for resistive and inductive loads. The surge current is not allowed to exceed the specification. For reasons of heat dissipation, when the load will be switched frequently, the average current over a reasonable time should not exceed the specification for continuous operation.

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Fusing

To protect relay against short circuit and overload a fast fuse with the correct rating for the load and the capacity of the relay should be chosen, for instance from the Wickman 193 range. Note that when overload current is not large it is possible that the fuse will not protect the relay because of the tolerance on the fuse rating.

Approvals



UL-file E 162828



The relay fulfils EMC-directive 89/336/EEC requirements. Product has been tested according generic standards EN50081-2 and EN50082-2. The relay fulfils also requirements of the low voltage directive 73/23/EEC.

Guarantee

The solid state I/O relays and accessories made by Delcon Oy are guaranteed free from design and manufacturing defects for a period of three years from the shipping date. For electromechanical relays the guarantee is one year. The guarantee liability is limited to replacement of defective material and related shipping charges. Defective products must be returned to the factory for evaluation. This guarantee does not cover damage due to incorrect use or electrical overload.