

勝特力材料 886-3-5753170
 胜特力电子(上海) 86-21-54151736
 胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



Monolithic CMOS Analog Multiplexers

General Description

Maxim's DG508A and DG509A are monolithic CMOS analog multiplexers (muxes): the DG508A is a single 8-channel (1-of-8) mux, and the DG509 is a differential 4-channel (2-of-8) mux.


Both devices guarantee break-before-make switching. Maxim guarantees these muxes will not latch up if the power supplies are turned off with the input signals still present. Maxim also guarantees continuous operation when these devices are powered by supplies ranging from $\pm 4.5V$ to $\pm 18V$.

The DG508A/DG509A are plug-in upgrades for the industry-standard DG508A/DG509A, respectively. Maxim's parts have lower on resistance, faster enable switching times, and significantly lower leakage currents. The DG508A/DG509A also consume significantly lower power, making them ideal for portable equipment.

Applications

- Control Systems
- Data Logging Systems
- Aircraft Heads-Up Displays
- Data-Acquisition Systems
- Signal Routing

Typical Operating Circuits

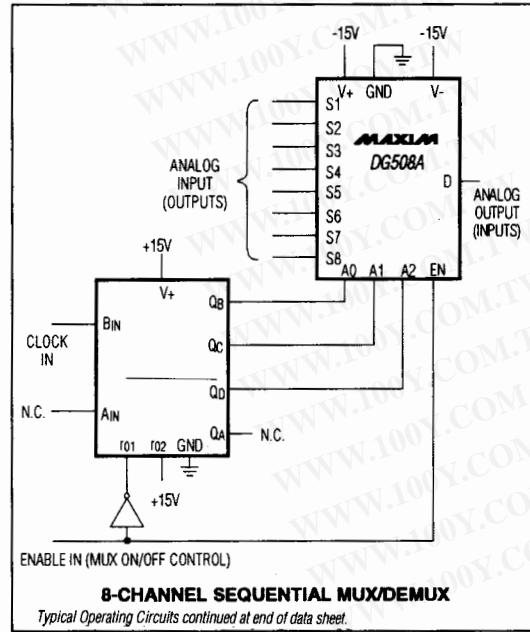

Features

- ♦ Improved Second Source
- ♦ Operate from $\pm 4.5V$ to $\pm 18V$ Supplies
- ♦ Symmetrical, Bidirectional Operation
- ♦ Logic and Enable Inputs, TTL and CMOS Compatible
- ♦ Latchup-Proof Construction
- ♦ Monolithic, Low-Power CMOS Design


Ordering Information

PART	TEMP. RANGE	PIN-PACKAGE
DG508ACJ	0°C to +70°C	16 Plastic DIP
DG508ACWE	0°C to +70°C	16 Wide SO
DG508AC/D	0°C to +70°C	Dice*
DG508ABK	-20°C to +85°C	16 CERDIP
DG508ADJ	-40°C to +85°C	16 Plastic DIP
DG508ADY	-40°C to +85°C	16 Narrow SO
DG508AEWE	-40°C to +85°C	16 Wide SO
DG508AAK	-55°C to +125°C	16 CERDIP

Ordering Information continued at end of data sheet.

*Contact factory for dice specifications.

Pin Configurations

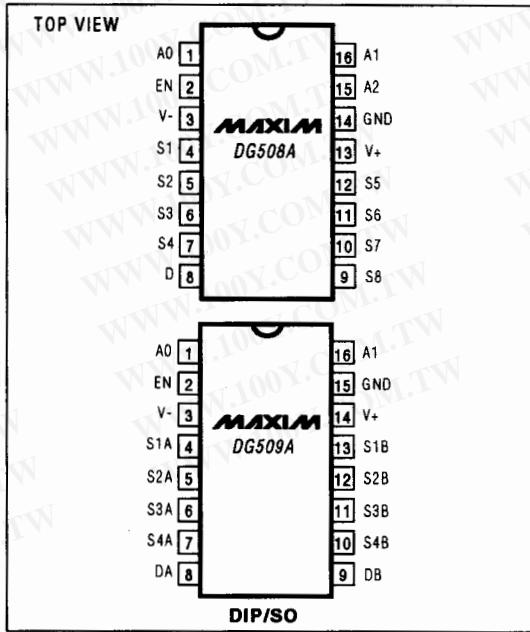

DG508A/DG509A

DG508A/DG509A

Monolithic CMOS Analog Multiplexers

ABSOLUTE MAXIMUM RATINGS

Voltage Referenced to V-

V+	+44V
GND	+25V
Digital Inputs, Vs and Vd (Note 1)	-2V to (V+ + 2V) or 20mA, whichever occurs first
Current (any terminal, except S or D)	30mA
Continuous Current, S or D	20mA
Peak Current, S or D (pulsed at 1ms, 10% duty cycle max)	40mA
Continuous Power Dissipation ($T_A = +70^\circ\text{C}$)	
Plastic DIP (derate 10.53mW/ $^\circ\text{C}$ above $+70^\circ\text{C}$)	842mW
Narrow SO (derate 8.70mW/ $^\circ\text{C}$ above $+70^\circ\text{C}$)	696mW
Wide SO (derate 9.52mW/ $^\circ\text{C}$ above $+70^\circ\text{C}$)	762mW
CERDIP (derate 10.00mW/ $^\circ\text{C}$ above $+70^\circ\text{C}$)	800mW

Note 1: Signals on S-, D-, or IN- exceeding V+ or V- will be clamped by internal diodes. Limit forward diode current to maximum current ratings.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum ratings conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS

($V_+ = 15\text{V}$, $V_- = -15\text{V}$, GND = 0V, $T_A = +25^\circ\text{C}$, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	DG508AA			DG508AD/E/B/C			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
SWITCH									
Analog-Signal Range	VANALOG		-15	15	-15	15	1	1	V
Drain-Source On Resistance (Note 4)	rDS(ON)	Sequence each switch on, $V_D = 10\text{V}$, $I_S = -200\mu\text{A}$	170	300	170	350	130	350	\Omega
		$V_D = -10\text{V}$, $I_S = -200\mu\text{A}$	130	300	130	350	130	350	
Greatest Change in Drain-Source On Resistance Between Channels	$\Delta r_{DS(ON)}$	$\Delta r_{DS(ON)} = \left(\frac{r_{DS(ON)\max} - r_{DS(ON)\min}}{r_{DS(ON)}} \right),$ $-10\text{V} \leq V_S \leq 10\text{V}$	6		6		6		%
Source-Off Leakage Current	I _{S(OFF)}	VEN = 0V	V _S = 10V, V _D = -10V	0.002	0.5	0.002	1	1	nA
			V _S = -10V, V _D = 10V	-0.5	-0.005	-1	-0.005	-1	
Drain-Off Leakage Current	I _{D(OFF)}	VEN = 0V	V _D = 10V, V _S = -10V	0.01	2	0.01	5	5	nA
			V _D = -10V, V _S = 10V	-2	-0.015	-5	-0.015	-5	
			V _D = 10V, V _S = -10V	0.005	2	0.005	5	5	
			V _D = -10V, V _S = 10V	-2	-0.008	-5	-0.008	-5	
Drain-On Leakage Current	I _{D(ON)}	(Note 2)	Sequence each switch on, VAL = 0.8V, VAH = 2.4V	V _{S(all)} = V _D = 10V	0.015	2	0.015	5	nA
				V _{S(all)} = V _D = -10V	2	-0.03	-5	-0.03	
				V _{S(all)} = V _D = 10V	0.007	2	0.007	5	
				V _{S(all)} = V _D = -10V	-2	-0.015	-5	-0.015	

勝特力材料 886-3-5753170
 胜特力电子(上海) 86-21-54151736
 胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

DG508A/DG509A

Monolithic CMOS Analog Multiplexers

ELECTRICAL CHARACTERISTICS (continued)

($V_+ = 15V$, $V_- = -15V$, GND = 0V, $T_A = +25^\circ C$, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	DG508AA DG509AA			DG508AD/E/B/C DG509AD/E/B/C			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
LOGIC INPUT									
Logic Input Current, Input Voltage High	IAH	VA = 2.4V	-10	-0.002	-10	-0.002	μA	μA	μA
		VA = 15V	0.006	10	0.006	10			
Logic Input Current, Input Voltage Low	IAL	All VA = 0V	VEN = 2.4V	-10	-0.002	-10	-0.002	μA	μA
		VEN 0V	0.006	10	0.006	10			
DYNAMIC									
Multiplexer Switching Time	t _{transition}	Figure 1	0.6	1.0	0.6	1.0	0.6	1.0	μs
Break-Before-Make Interval	t _{open}	Figure 3	0.2	0.2	0.2	0.2	0.2	0.2	μs
Enable Turn-On Time	t _{on} (EN)	Figure 2	0.4	1.0	0.4	1.5	0.4	1.5	μs
Enable Turn-Off Time	t _{off} (EN)	Figure 2	0.2	0.7	0.2	1.0	0.2	1.0	μs
Off Isolation (Note 3)	OIRR	VEN = 0V, RL = 1kΩ, CL = 15pF, VS = 7VRMS, f = 500kHz	68	68	68	68	68	68	dB
Source-Off Capacitance	C _{S(off)}	VS = 0V, VEN = 0V, f = 140kHz	5	5	5	5	5	5	pF
Drain-Off Capacitance	DG508A DG509A	C _{D(off)}	VS = 0V, VEN = 0V, f = 140kHz	25	25	25	25	25	pF
			VS = 0V, VEN = 0V, f = 140kHz	12	12	12	12	12	pF
SUPPLY									
Positive Supply Current	I ₊	VEN = 2.4V, all VA = 0V or 2.4V	0.02	0.2	0.02	0.2	0.02	0.2	mA
Negative Supply Current	I ₋	VEN = 2.4V, all VA = 0V or 2.4V	-0.1	-0.01	-0.1	-0.01	-0.1	-0.01	mA
Positive Supply Current in Standby	I ₊	VEN = 0V, all VA = 0V or 2.4V	0.02	0.2	0.02	0.2	0.02	0.2	mA
Negative Supply Current in Standby	I ₋	VEN = 0V, all VA = 0V or 2.4V	-0.1	-0.01	-0.1	-0.01	-0.1	-0.01	mA
Power-Supply Range for Continuous Operation (Notes 4, 5)	V ₋ , V ₊		±4.5	±18.0	±4.5	±18.0	±4.5	±18.0	V

DG508A/DG509A

Monolithic CMOS Analog Multiplexers

ELECTRICAL CHARACTERISTICS (continued)

(V₊ = 15V, GND = 0V, T_A = T_{MIN} to T_{MAX}, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	DG508AA			DG508AD/E/B/C			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
SWITCH									
Analog-Signal Range	V _{ANALOG}		-15	15	-15	15			V
Drain-Source On Resistance	R _{D(S)}	Sequence each switch on, V _{AL} = 0.8V, V _{AH} = 2.4V	V _D = 10V, I _S = -200μA	400		400	450		Ω
			V _D = -10V, I _S = -200μA		400		450		
Source-Off Leakage Current	I _{S(OFF)}	V _{EN} = 0V	V _S = 10V, V _D = -10V		50		50		nA
			V _S = -10V, V _D = 10V	-50		-50			
Drain-Off Leakage Current	I _{D(OFF)}	V _{EN} = 0V	V _D = 10V, V _S = -10V		200		100		nA
			V _D = -10V, V _S = 10V	-200		-100			
DG508A	DG508A	V _{S(all)} = V _D = 10V	V _D = 10V, V _S = -10V		100		100		nA
			V _D = -10V, V _S = 10V	-100		-100			
DG509A	DG509A	V _{S(all)} = V _D = -10V	V _D = 10V, V _S = 10V		200		100		nA
			V _D = -10V, V _S = -10V	-200		-100			
Drain-On Leakage Current	ID(ON) (Note 2)	Sequence each switch on, V _{AL} = 0.8V, V _{AH} = 2.4V	V _{S(all)} = V _D = 10V		100		100		nA
			V _{S(all)} = V _D = -10V	-100		-100			
LOGIC INPUT									
Logic Input Current, Input Voltage High	I _{AH}	V _A = 2.4V V _A = 15V	V _A = 2.4V		-30		-30		μA
			V _A = 15V		30		30		
Logic Input Current, Input Voltage Low	I _{AL}	All V _A = 0V	V _{EN} = 2.4V	-30		-30			μA
			V _{EN} 0V	-30		-30			

Note 2: I_{D(ON)} is leakage from driver into "on" switch.


Note 3: Off isolation = $20\log \frac{|V_S|}{|V_D|}$,

V_S = input to "off" switch,
V_D = output due to V_S.


Note 4: Electrical characteristics (such as on resistance) will change when power supplies other than ±15V are used.

Note 5: For designs requiring single 5V or dual ±5V operation, refer to Maxim's improved MAX338 and MAX339. Minimum operating voltage for DG508ADY and DG509ADY is ±9V.

Functional Diagrams

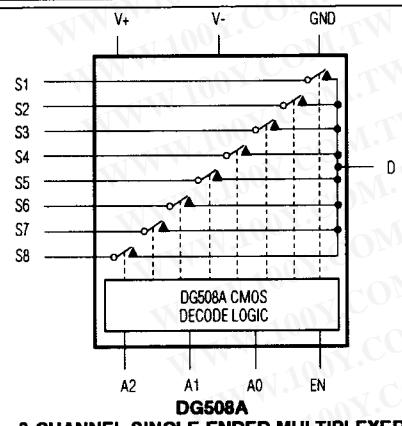

8-CHANNEL SINGLE-ENDED MULTIPLEXER

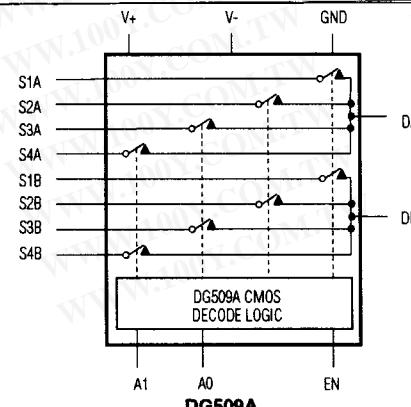

DIFFERENTIAL 4-CHANNEL MULTIPLEXER

Monolithic CMOS Analog Multiplexers

Test Circuits/Timing Diagrams

DG508A/DG509A

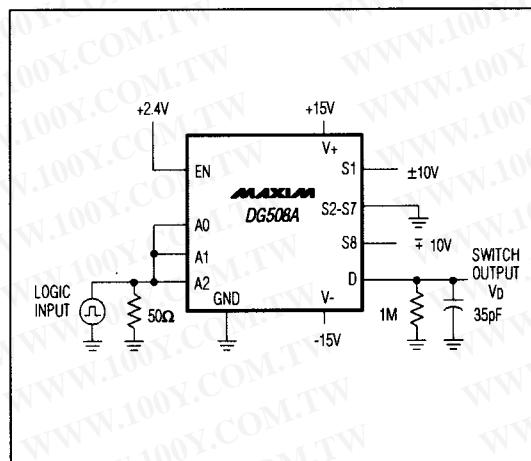


Figure 1a. Switching-Time Test Circuit

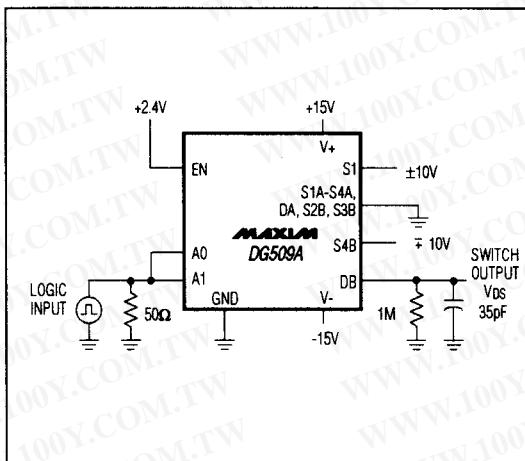


Figure 1b. Switching-Time Test Circuit

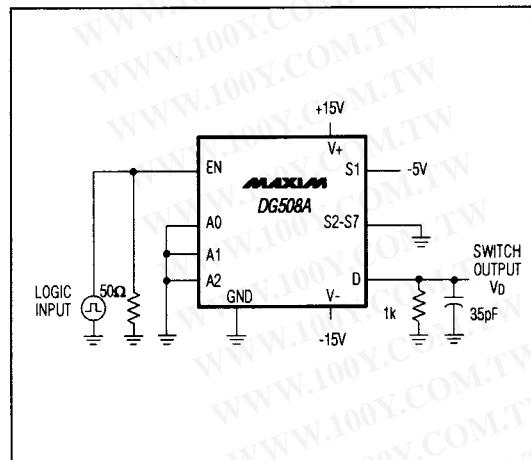


Figure 2a. DG509A Enable-Time Test Circuit

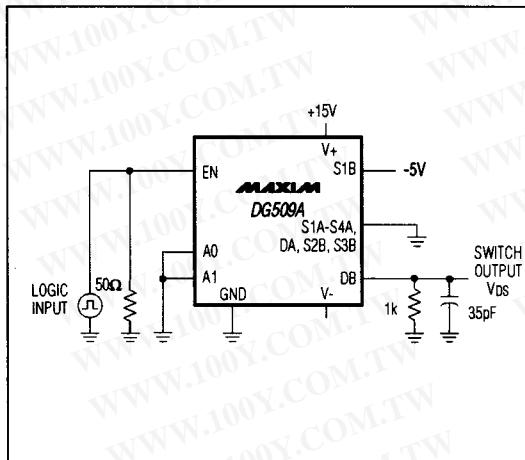


Figure 2b. DG509A Enable-Time Test Circuit

DG508A/DG509A

Monolithic CMOS Analog Multiplexers

Test Circuits/Timing Diagrams (continued)

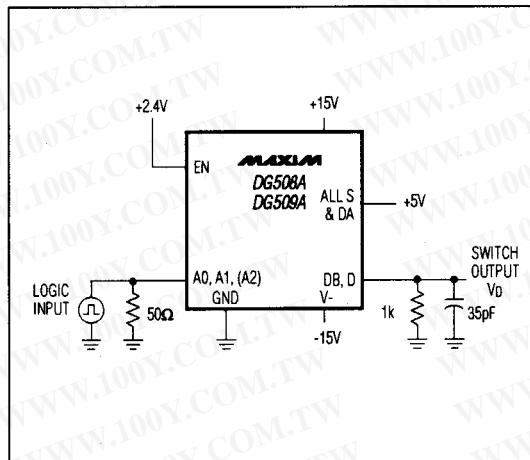


Figure 3. Break-Before-Make Test Circuit

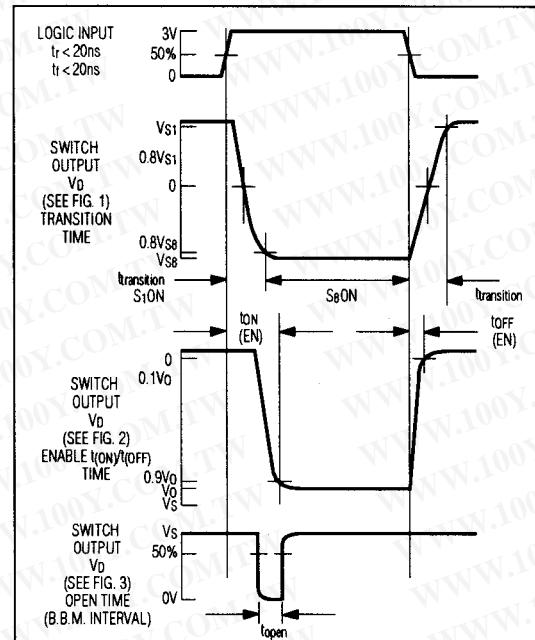


Figure 4. Timing Diagram for Figures 1, 2, and 3

Table 1a. DG508A Truth Table

A2	A1	A0	EN	ON SWITCH
X	X	X	0	NONE
0	0	0	1	1
0	0	1	1	2
0	1	0	1	3
0	1	1	1	4
1	0	0	1	5
1	0	1	1	6
1	1	0	1	7
1	1	1	1	8

X = Don't Care


Table 1b. DG509A Truth Table

A1	A0	EN	ON SWITCH
X	X	0	NONE
0	0	1	1
0	1	1	2
1	0	1	3
1	1	1	4

X = Don't Care

Monolithic CMOS Analog Multiplexers

Typical Operating Circuits (continued)

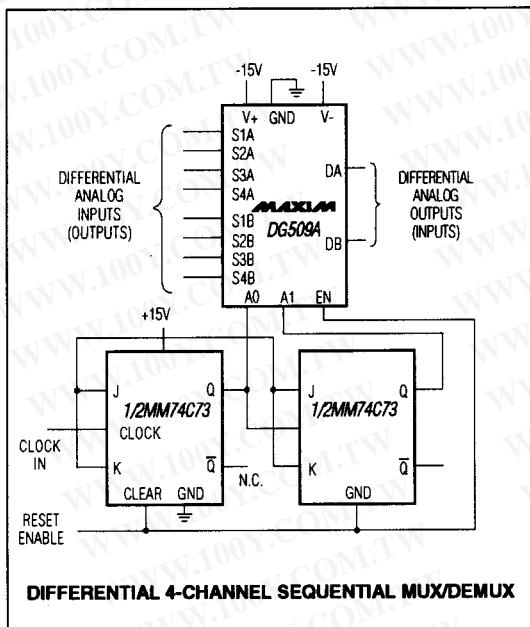

DIFFERENTIAL 4-CHANNEL SEQUENTIAL MUX/DEMUX

Ordering Information (continued)

PART	TEMP. RANGE	PIN-PACKAGE
DG509ACJ	0°C to +70°C	16 Plastic DIP
DG509ACWE	0°C to +70°C	16 Wide SO
DG509AC/D	0°C to +70°C	Dice*
DG509ABK	-20°C to +85°C	16 CERDIP
DG509ADJ	-40°C to +85°C	16 Plastic DIP
DG509ADY	-40°C to +85°C	16 Narrow SO
DG509AEWE	-40°C to +85°C	16 Wide SO
DG509AAK	-55°C to +125°C	16 CERDIP

*Contact factory for dice specifications.

DG508A/DG509A

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

Monolithic CMOS Analog Multiplexers

DG508A/DG509A

Chip Topographies

