

POSITION	A	B	C
14M	25.50	36.00	43.90
24M	36.30	46.80	54.70
36M	49.30	59.70	67.70
50M	64.40	74.90	82.80

SPECIFICATION

Electric

Current Rating: 1Amp

Contact Resistance: 25 Milliohm Max.

Insulation Resistance: 1000 Megohm Max. At 500V DC

Dielectric Withstanding Voltage: 1000V AC/Minute.

Operating Temperature: -55° C to +105° C



Material

Insulator: PBT, UL94V-0

Contact: Copper Alloy

Shell: Steel, Nickel Over Copper Plated

Hood: Steel, Nickel Over Copper Plated

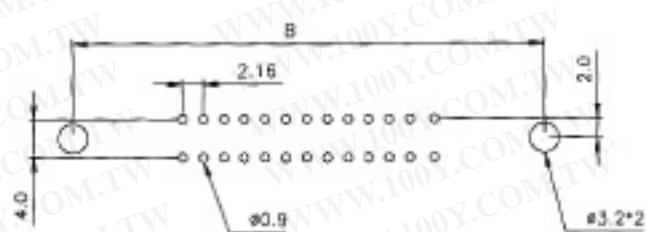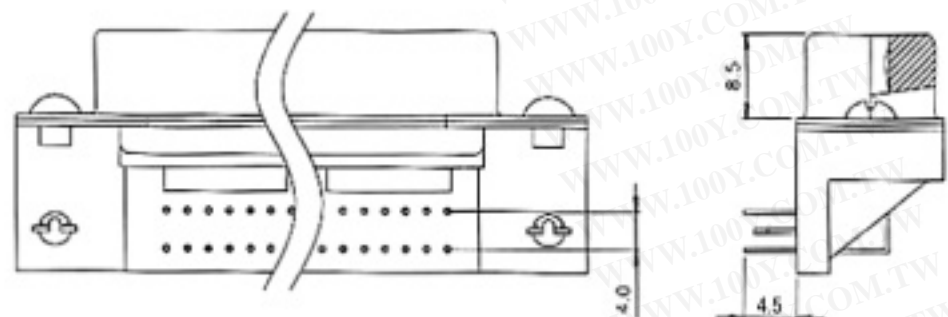

PCB LAYOUT

ORDER INFORMATION

14
24
36
50

M: Male

A: Panel Type
W/O Latch

A: Screw W/Boardlock

S: Selective Gold
G: Gold Flash
C: Gold 15u"
B: Gold 30u"

L: Blue
B: Black

Fill It With "0"

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

UNIT

SCALE

PART NAME

MM

3:1

Centronic PCB 90° Male Panel Type
W/O Latch Screw W/Boardlock

APPD.

CKD.

TOLERANCE

PART NO.

REV

制表日: 2002/12/04

DRAWING.

APPROVED

± 0.3

A

1 2 3 4 5 6 7 8