

SLIME TYPE ESR3 SERIES

 E155181(R)

FEATURES

- Optically Isolated.
- Low On-State Resistance
- Low Input Power Consumption
- TTL and CMOS Compatible
- RC networks (VAC)
- MOSFET Output Thyristor (VDC)

APPLICATIONS


- Household Appliance
- Temperature Control System
- Industrial Automatic Control
- Lighting System
- Office Appliances
- Factory Appliances

PART NUMBERING SYSTEM

ESR3	D05	A20	20	0	Z
					+--- Z:RoHS Compliance
					+--- Specially Code:
					0:Standard
					+--- Output Voltage:
					05:24VDC
					10:48VDC
					20:100VDC/240VAC
					+--- Output Load Current:
					A20:AC2.0A D10:DC1.0A
					D25:DC2.5A D40:DC4.0A
					+--- Input Control Voltage:
					D05:DC5V D12:DC12V
					D24:DC24V D48:DC48V
					+--- Series Name: ESR:SLIM package SSR



DIMENSIONS

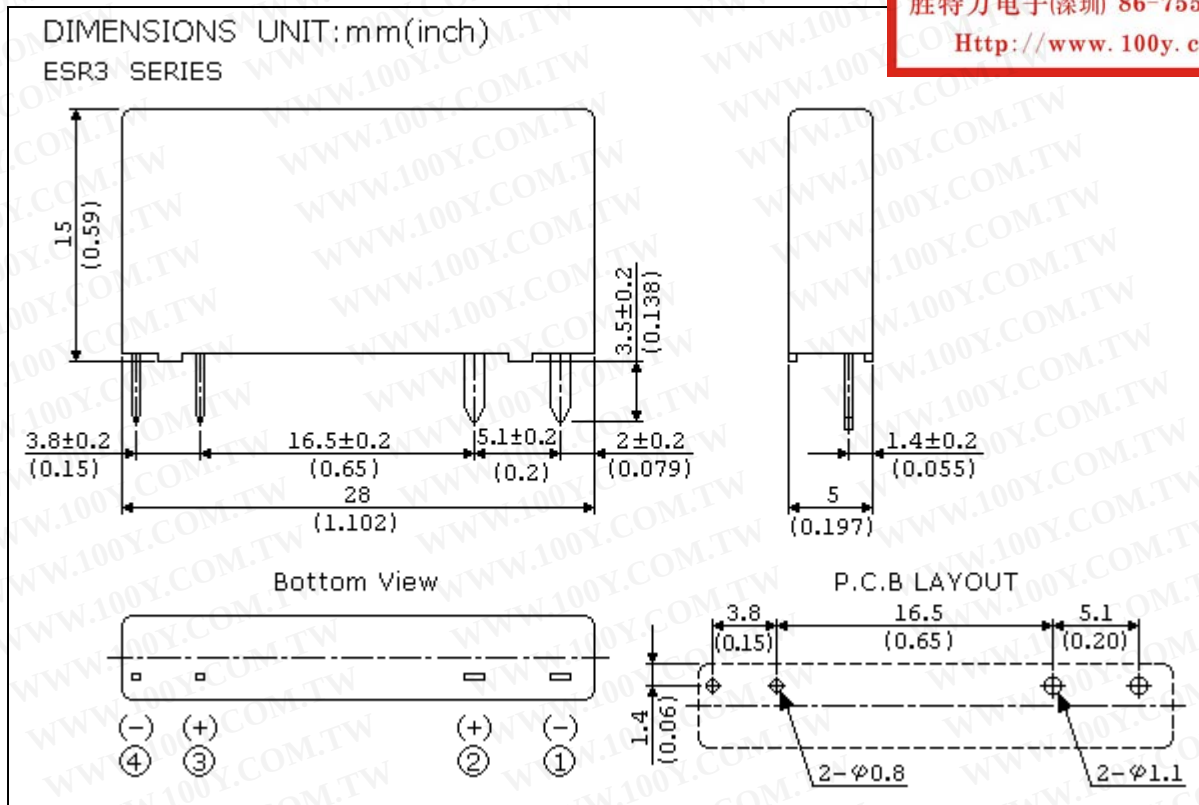

SPECIFICATIONS (at 20°C)..... AC OUTPUT

DESCRIPTION	TYPES	ESR3		
		D05A20200	D12A20200	D24A20200
▶ INPUT CIRCUIT				
Nominal Voltage		5Vdc	12Vdc	24Vdc
Control Voltage Range		3~10	7~20	18~32
Control Current		12mA	10mA	7.7mA
Release Voltage		1V	1V	1V
Input Internal Resistor		300Ω	1010Ω	3000Ω
▶ GENERAL CHARACTERISTICS				
Operating Temperature Range		-20℃ to +80℃		
Storage Temperature Range		-40℃ to +100℃		
Input-output isolation		4KVrms, 1 minute (for input-output)		
Maximum Soldering Heat		220℃ (10sec)		
Weight		4g		
▶ OUTPUT CHARACTERISTICS (at 20℃)				
Load Voltage		240Vrms		
Operating Range		12-280Vrms		
Peak Voltage (Clamping Voltage)		600V		
Nominal Current		2A		
Non Repetitive Overload Current		80A		

On State Voltage Drop	1.2V
Off State Leakage Current	<1.5mA
Minimum Load Current	50mA
Turn On Time (at nominal voltage)	100 μ s
Turn Off Time (at nominal voltage)	1/2 cycle + 1ms
Operating Switching Frequency	47-400Hz
Off State dv/dt	500V/ μ s
RC Sunbber	10nF, 100 Ω

SPECIFICATIONS..... DC OUTPUT

DESCRIPTION	TYPES	ESR3			
		D05D25100	D12D25100	D24D25100	D48D25100
▶ INPUT CIRCUIT					
Nominal Voltage		5Vdc	12Vdc	24Vdc	48Vdc
Control Voltage Range		3~10	7~20	18~32	38~58
Control Current		12mA	10mA	7.7mA	4.4mA
Release Voltage		1.8V	3.6V	8.3V	8.3V
Input Impedance		320Ω	1070Ω	3000Ω	10800Ω
▶ GENERAL CHARACTERISTICS					
Operating Temperature Range		-20℃ to +80℃			
Storage Temperature Range		-25℃ to +80℃			
Input-output isolation		3750Vrms, 1 minute (for input-output)			
Maximum Soldering Heat		220℃ (10sec)			
Weight		4g			
▶ OUTPUT CHARACTERISTICS					
Load Voltage		48V			
Operating Range		0-60V			
Nominal Current		2.5A			
Non Repetitive Overload Current		6A			
On State Voltage Drop(at IL=2A)		0.4V			
Static Output On- Resistance (at IL=2A)		200mΩ			
Off State Leakage Current		<1mA			
Minimum Load Current		1mA			
Turn On Time (at nominal voltage)		50μs			
Turn Off Time (at nominal voltage)		600μs			
Operating Switching Frequency		10Hz			
Transient Voltage Suppressor		YES			
Breakdown Voltage		60V			
Peak Power Dissipation		600W			

Peak Voltage (Clamping Voltage)	100V
------------------------------------	------

DESCRIPTION	TYPES	ESR3			
		D05D40050	D12D40050	D24D40050	D48D40050
▶ INPUT CIRCUIT					
Nominal Voltage		5Vdc	12Vdc	24Vdc	48Vdc
Control Voltage Range		3~10	7~20	18~32	38~58
Control Current		12mA	10mA	7.7mA	4.4mA
Release Voltage		1.8V	3.6V	8.3V	8.3V
Input Impedance		320Ω	1070Ω	3000Ω	10800Ω
▶ GENERAL CHARACTERISTICS					
Operating Temperature Range		-20℃ to +80℃			
Storage Temperature Range		-25℃ to +80℃			
Input-output isolation		3750Vrms, 1 minute (for input-output)			
Maximum Soldering Heat		220℃ (10sec)			
Weight		4g			
▶ OUTPUT CHARACTERISTICS					
Load Voltage		24V			
Operating Range		0-32V			
Nominal Current		4A			
Non Repetitive Overload Current		7A			
On State Voltage Drop(at IL=2A)		0.24V			
Static Output On- Resistance (at IL=2A)		120mΩ			
Off State Leakage Current		<1mA			
Minimum Load Current		1mA			
Turn On Time (at nominal voltage)		50μs			
Turn Off Time (at nominal voltage)		600μs			
Operating Switching Frequency		10Hz			
Transient Voltage Suppressor		YES			
Breakdown Voltage		36V			
Peak Power Dissipation		600W			
Peak Voltage (Clamping Voltage)		60V			

DESCRIPTION	TYPES	ESR3			
	D05D10200	D12D10200	D24D10200	D48D10200	
▶ INPUT CIRCUIT					
Nominal Voltage	5Vdc	12Vdc	24Vdc	48Vdc	
Control Voltage Range	3~10	7~20	18~32	38~58	
Control Current	12mA	10mA	7.7mA	4.4mA	

Release Voltage	1.8V	3.6V	8.3V	8.3V
Input Impedance	320Ω	1070Ω	3000Ω	10800Ω
▶ GENERAL CHARACTERISTICS				
Operating Temperature Range	-20℃ to +75℃			
Storage Temperature Range	-25℃ to +80℃			
Input-output isolation	2500Vrms, 1 minute (for input-output)			
Maximum Soldering Heat	220℃ (10sec)			
Weight	4g			
▶ OUTPUT CHARACTERISTICS				
Load Voltage	100V			
Operating Range	0-180V			
Nominal Current	1A			
Non Repetitive Overload Current	6A			
On State Voltage Drop(at IL=2A)	0.6V			
Static Output On- Resistance (at IL=2A)	1Ω			
Off State Leakage Current	<1mA			
Minimum Load Current	1mA			
Turn On Time (at nominal voltage)	50μs			
Turn Off Time (at nominal voltage)	600μs			
Operating Switching Frequency	10Hz			
Transient Voltage Suppressor	YES			
Breakdown Voltage	180V			
Peak Power Dissipation	600W			
Peak Voltage (Clamping Voltage)	180V			

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)