



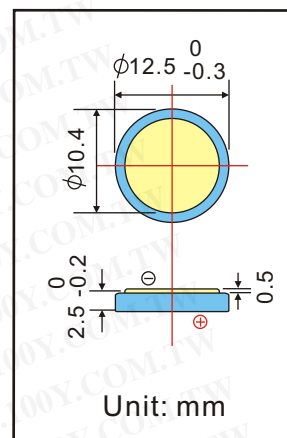
CR1225 *Brief Datasheet*

Lithium Manganese Dioxide Coin Batteries

1 BASIC SPECIFICATION

Nominal Voltage(V)	3.0
Nominal Capacity(mAh)	50
Continuous discharge with 15k Ω to 2.0V cut-off, +23°C	
Continuous standard load (k Ω)	15
Operating temperature (°C)	-20~+60
Weight (g)	1.0

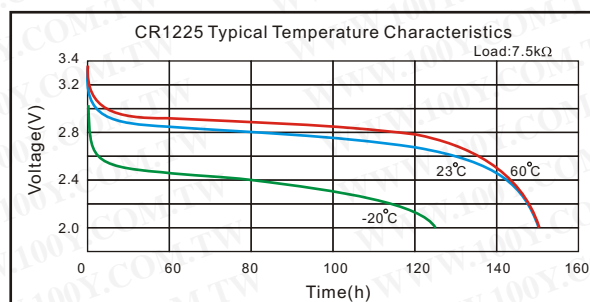
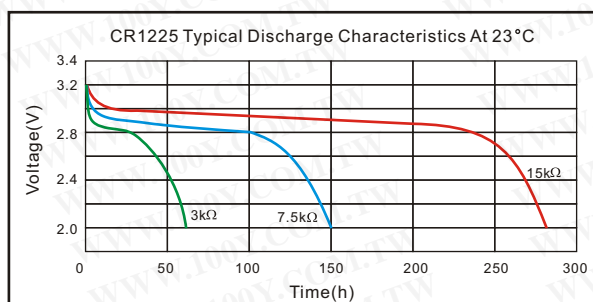
Note: Typical values relative to cells stored for three months at 23°C.



2 MAIN FEATURES

- ◆ Light Weight, High Voltage and High Energy Density.
- ◆ Excellent Stable Discharge Characteristics and outstanding Temperature Characteristics.
- ◆ Excellent Leakage Resistance and Excellent Long-term Reliability.

3 ELECTRICAL CHARACTERISTICS



4 WARNING!

- ◆ Do not recharge, short-circuit, disassemble, deform, heat or place the battery near a direct flame. Any of the above actions could cause it to ignite explode or become damaged.
- ◆ Keep this battery out of the reach of children.
- ◆ When storing the battery or throwing it away, be sure to cover it with tape.

Note: Any representations in this brochure concerning performance, are for informational purposes only and do not constitute a warranty, either expressed or implied, of future performance.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)




1

2

3




4

A

-VAY3




A

B

-VBY2


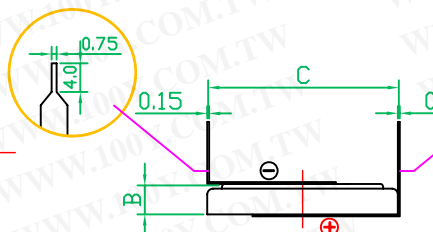

B

C

-VCY2




C

D

-VDY2


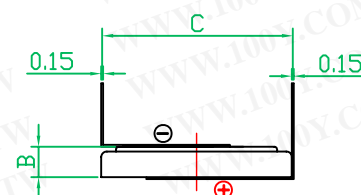

D

E

-VEY3

E

F

-VFY2

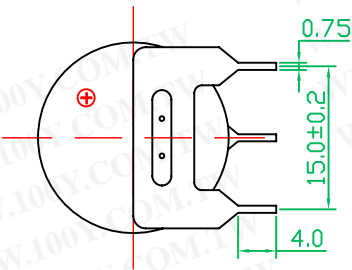


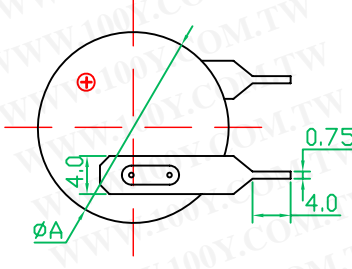


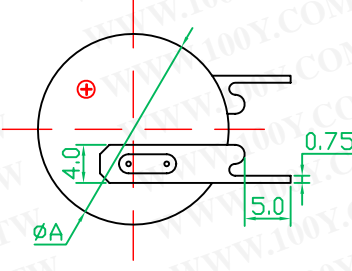


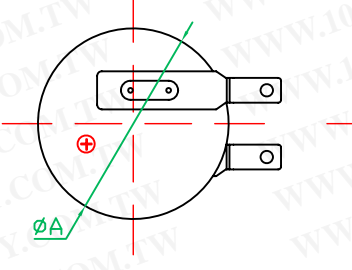


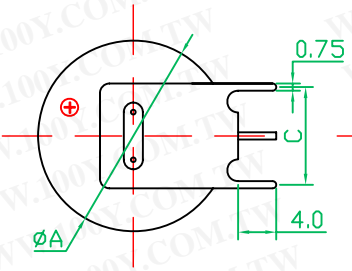


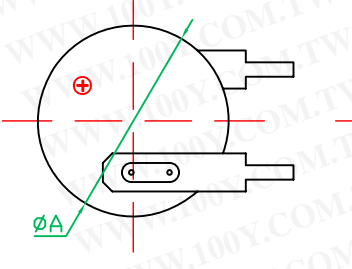


F

1

2

3

4

1	2	3	4
A -PAN3			
B -PBN2			
C -PCN2			
D -PDY2			
E -PEN3			
F -PFN2			
1	2	3	4

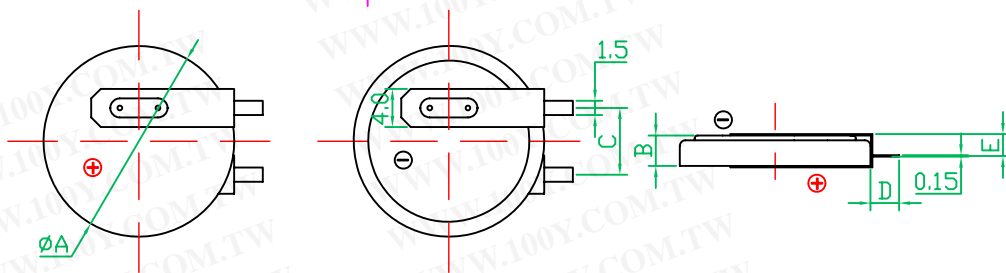
1

2

3

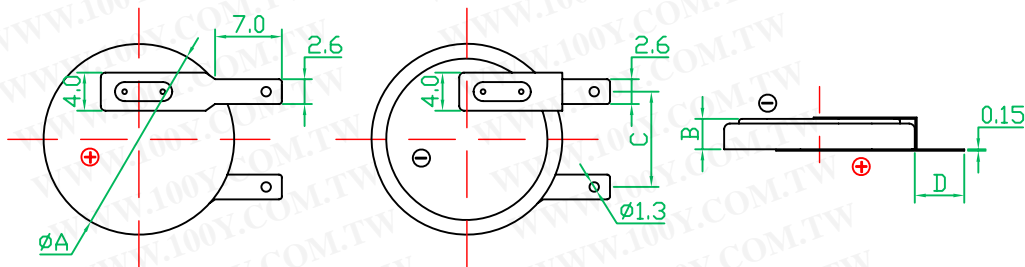
4

A

-PGY2

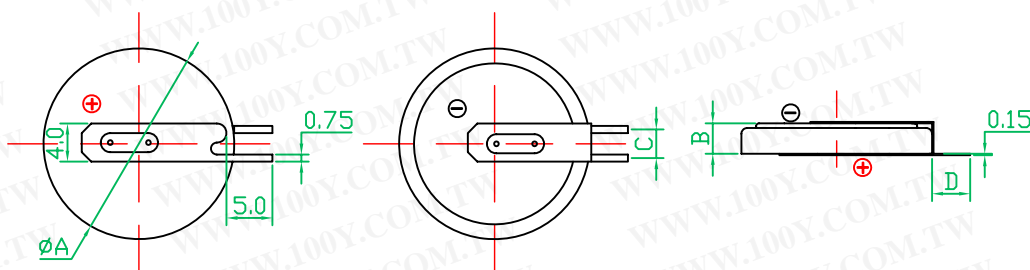
A

B

-PHY2

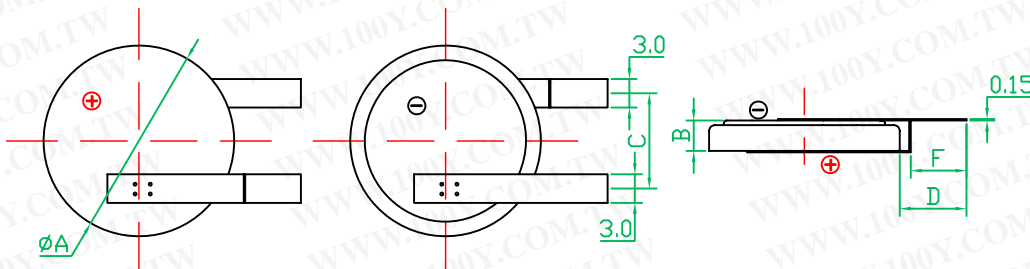
B

C

-PIY2

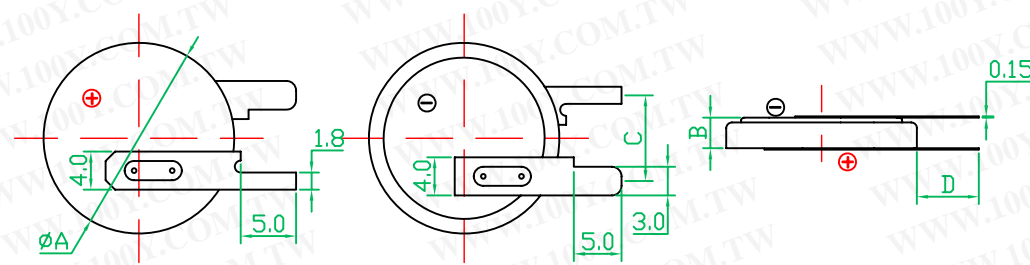
C

D

-PJY2

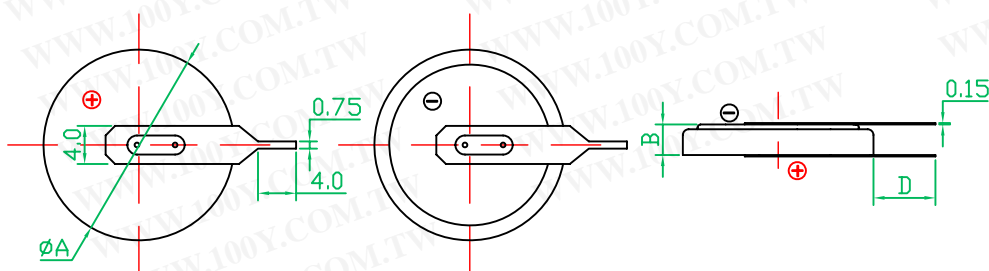
D

E

-PKY2

E

F

-SAN2

F

1

2

3

4

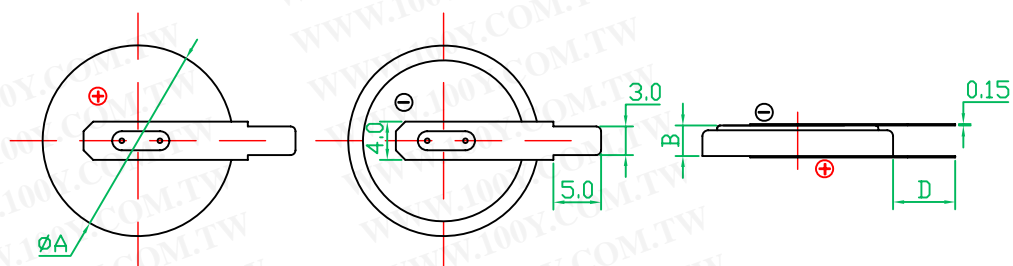
1

2

3

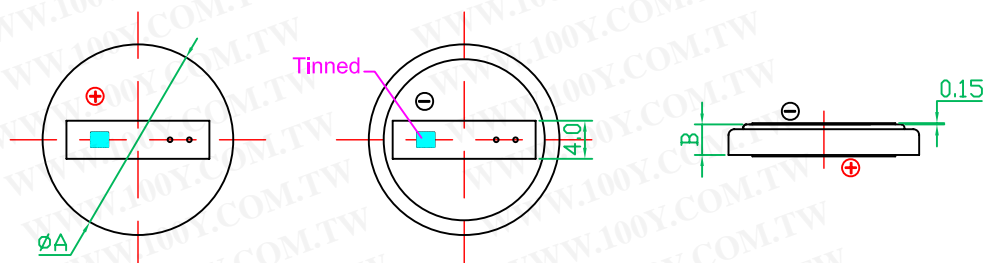
4

A

-SBN2

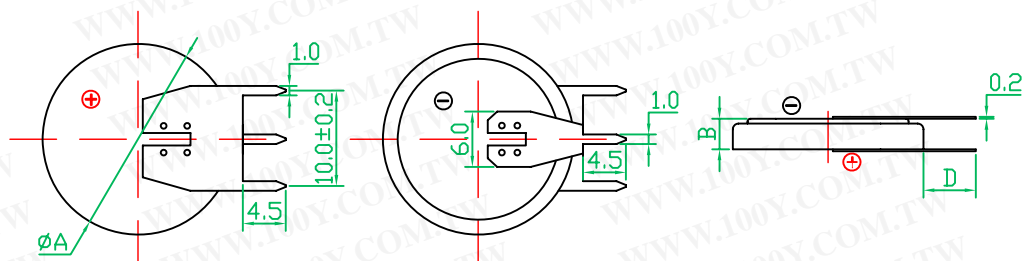
A

B

-SCN2

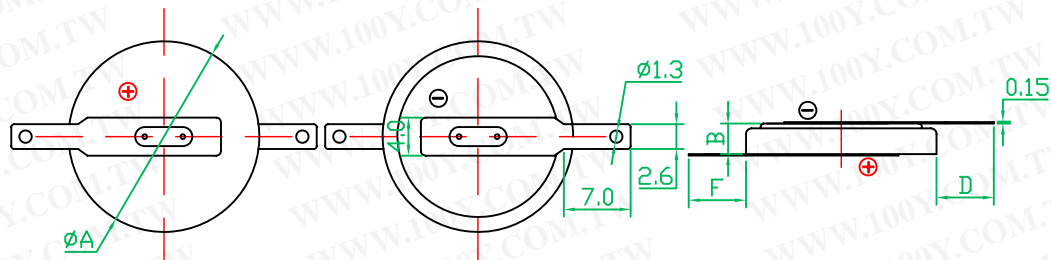
B

C

-SDN3

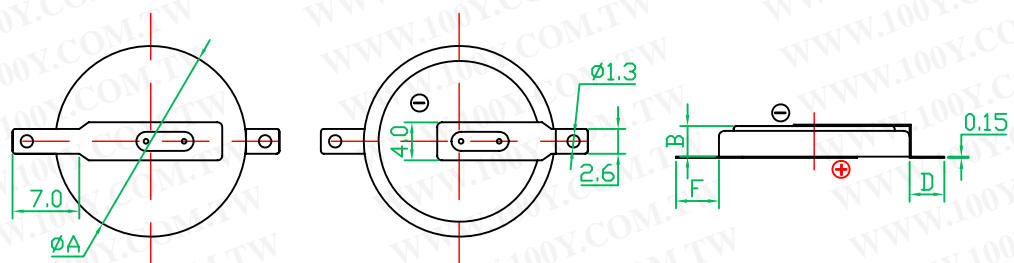
C

D

-LAN2

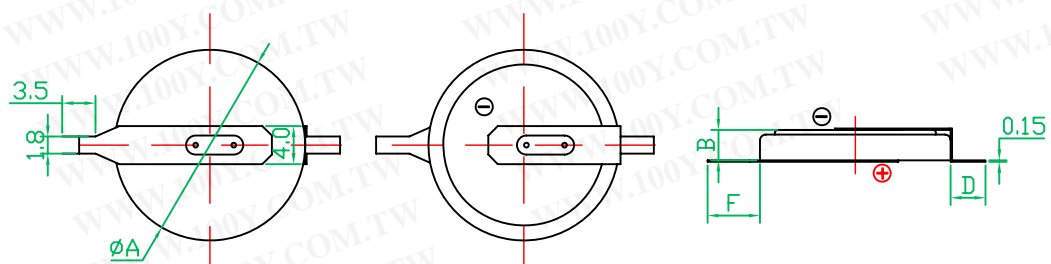
D

E

-LBY2

E

F

-LCY2

F

1

2

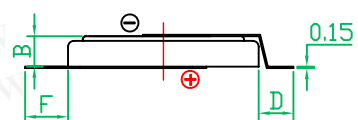


3

4

1




A

-LDY2



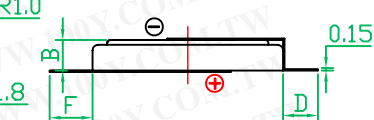


B

-LEY2






C

-LFY2



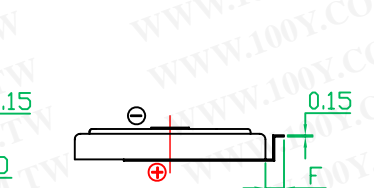


D

-LGY2



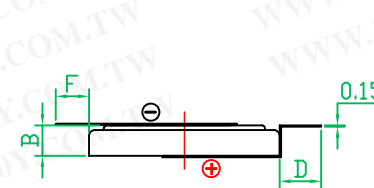


E

-AAY2

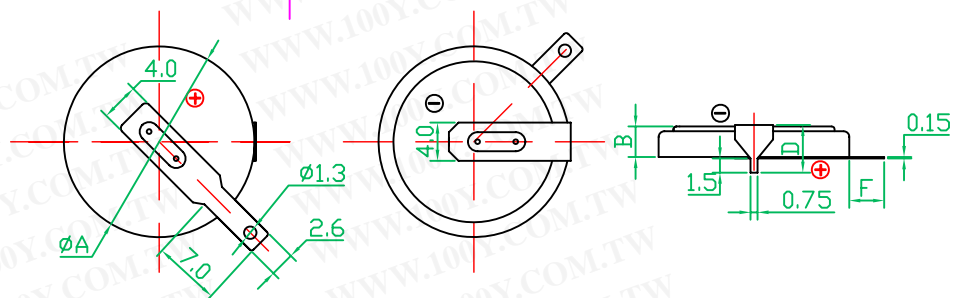


F

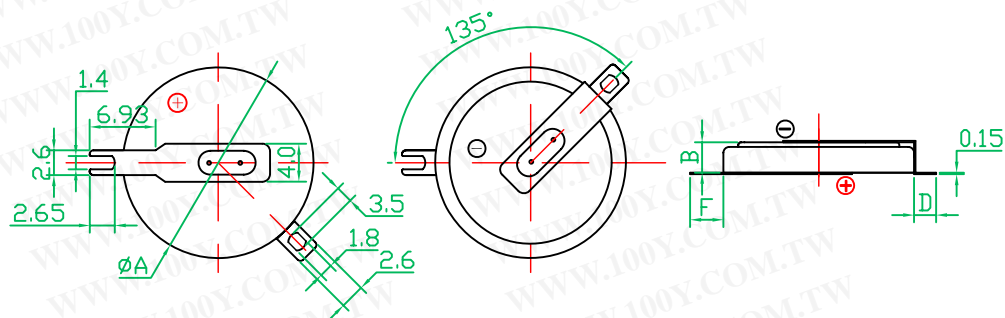
-ABY2



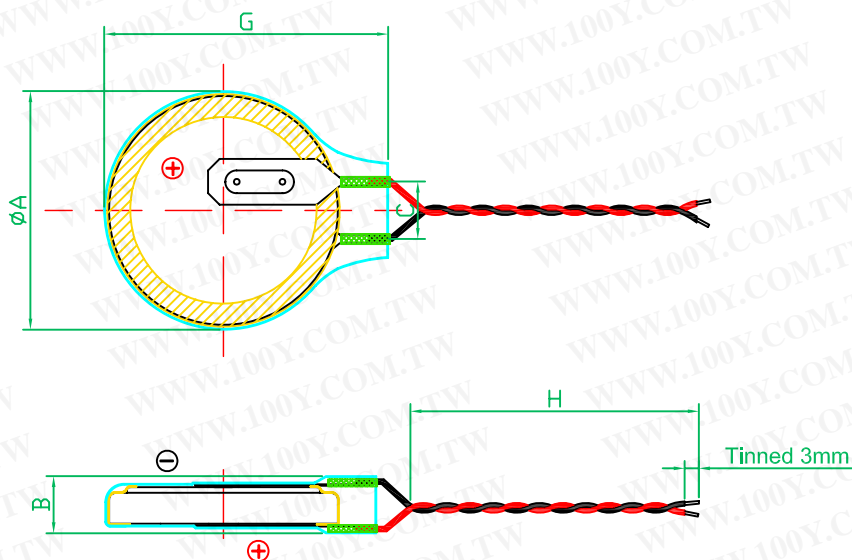
-ADY2



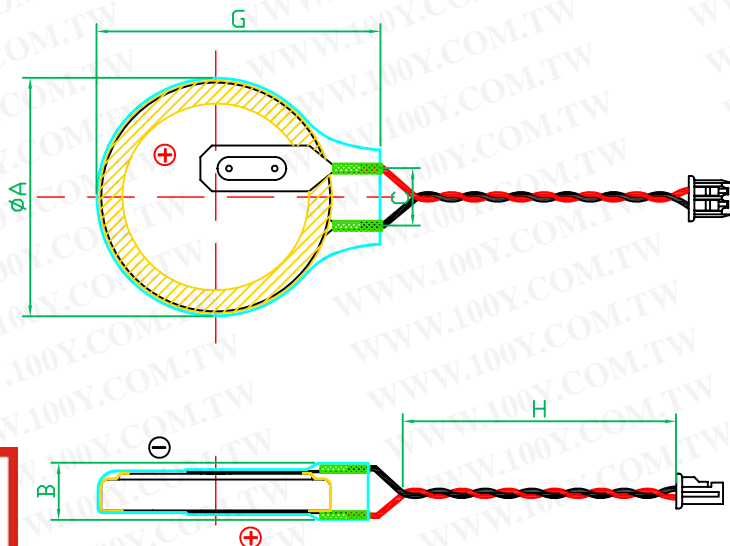
-AFY2



-LD



-LD/



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)