
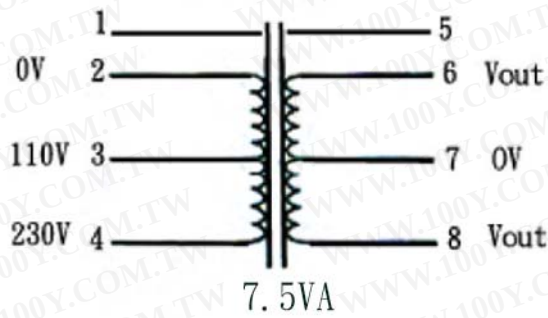


勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

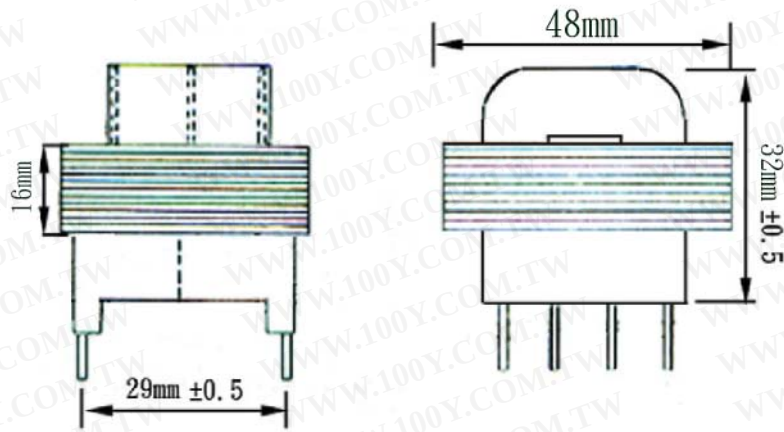

POWER TRANSFORMER

电源变压器

FEATURES

- Conform to UL Safety Standards
- Dielectric Strength: 2500Vrms
- Temperature Class: B (130°C)
- Various Inputs Options: 100V/110V/115V/120V/220V/230V/240V/480V 50/60Hz
- Single and Dual or More Secondary
- Power Range: 1.1VA to 600VA
- Lamination Size Range: EI28 to EI133
- Assemble Style: PCB and Foot Mounting or Others According to Customer's Requirement


特性

- 符合UL安规要求
- 介电强度: 2500Vrms
- 温度等级: B级 (130°C)
- 多种的输入选择: 100V/110V/115V/120V/220V/230V/240V/480V 50/60Hz
- 单组、双组或多组输出
- 功率范围: 1.1VA至600VA
- 钢片尺寸范围: 从EI28至EI133
- 安装方式: 插针式、底板(铁桥)式或根据客户要求订制


PCB TRANSFORMERS

VA	L	W	H	M	A	B	C	Output Voltage (V)	Weight (g)
1.1	35.5MAX	30.0MAX	24.0MAX	--	6.35	6.35	30.99	5-36	77
2.4	35.5MAX	30.0MAX	30.5MAX	--	6.35	6.35	30.99	5-36	113
6	41.8MAX	34.0MAX	36.5MAX	27	6.35	8.89	32.51	5-36	200
12	48.5MAX	40.5MAX	36.5MAX	32	7.62	10.16	35.56	5-36	316
20	57.5MAX	48.0MAX	36.5MAX	38	7.62	10.16	40.39	5-36	362

OUTLINE DIMENSIONS

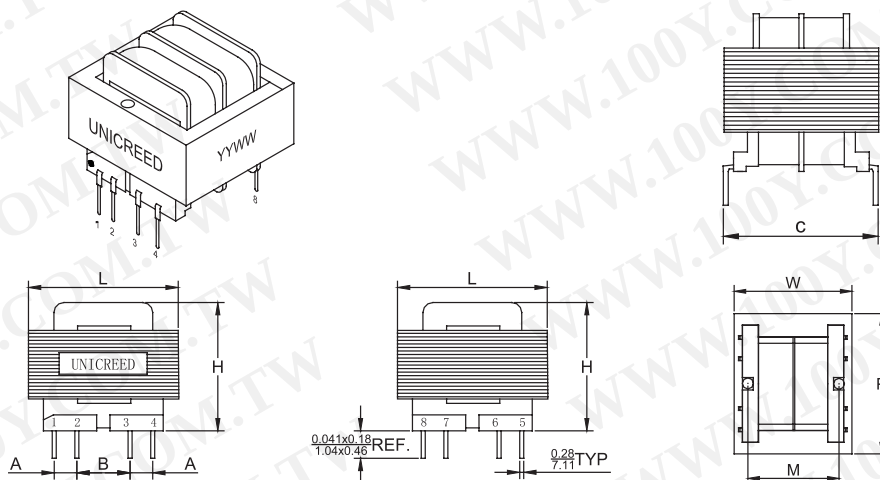


ELECTRICAL SCHEMATIC

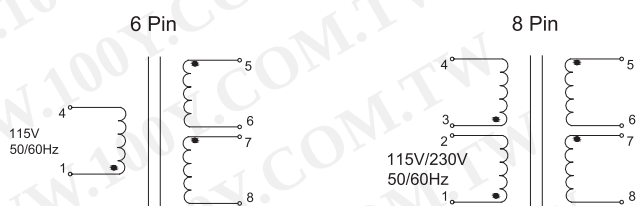


PCB TRANSFORMERS

VA	L	W	H	M	A	B	C	Output Voltage (V)	Weight (g)
2.5	41.5MAX	37.0MAX	30.0MAX	26.92	5.08	6.35	25.4	5-36	113
5	41.5MAX	37.0MAX	36.0MAX	26.92	5.08	10.16	25.4	5-36	168
10	48.5MAX	41.0MAX	37.0MAX	31.75	5.08	10.16	29	5-36	240

OUTLINE DIMENSIONS

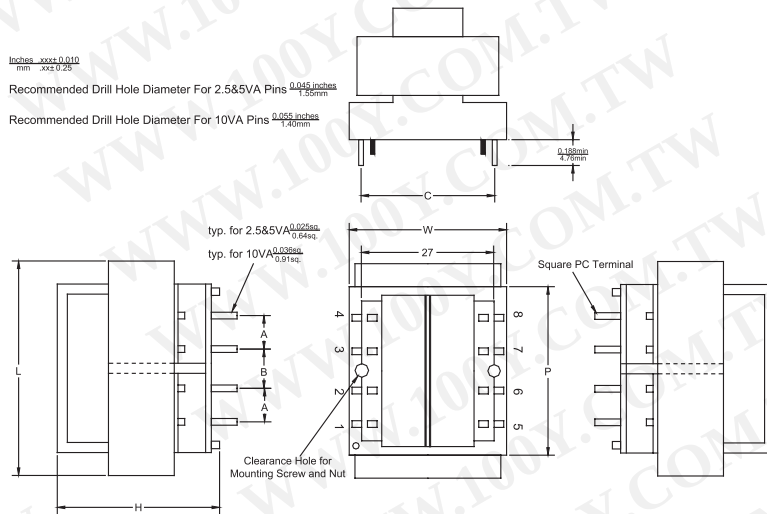


ELECTRICAL SCHEMATIC

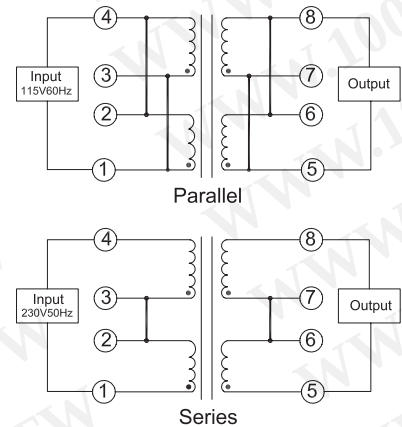

FOOT MOUNTING TRANSFORMERS

VA	A	B	C	D	E	F	Output Voltage (V)
3	56.0MAX	36.8	34.0MAX	17.5	150	31.5	6-48
6	66.0MAX	42.8	36.5MAX	18.5	150	35	6-48
12	73.0MAX	50	44.0MAX	25.5	150	41	6-48
24	82.0MAX	59.5	53.0MAX	27.5	150	45	6-48
40	94.0MAX	69	61.0MAX	27.5	150	50	6-48

OUTLINE DIMENSIONS

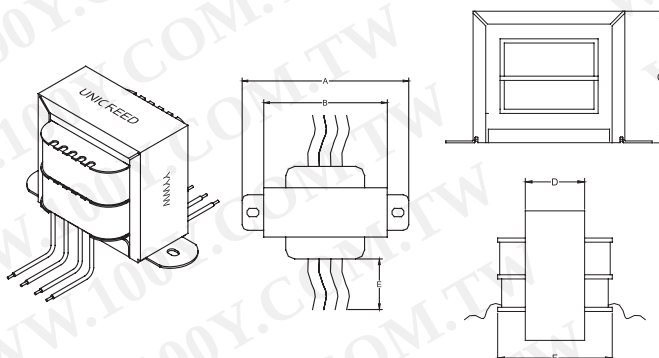

ELECTRICAL SCHEMATIC

