

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
 Http://www.100y.com.tw



Energizer® MAX®

Energizer® MAX®

Energizer® MAX®

Energizer® MAX®

Energizer® MAX®

AA

AAA

C

D

9V


Current Batteries

Datasheet	Picture	Size	Capacity (mAh)	Voltage (nom.)	ANSI	IEC	Diam. (mm)	Weight (g)	Height (mm)	Length (mm)	Width (mm)
521		Lantern	52000	6	918A	4LR25-2	N/A	1900	127	136.5	73
522		9V	625	9	1604A	6LR61	N/A	45.6	48.5	26.5	17.5
528		Lantern	26000	6	915A	4R25Y	N/A	885	112	68.2	68.2
529		Lantern	26000	6	908A	4LR25X	N/A	885	115	68.2	68.2
529_CAN		Lantern	20500	6	908A	4LR25X	N/A	665	115	68.2	68.2
539		J	625	6	1412A	4LR61	N/A	30	48.5	35.6	9.18
E90		N	1000	1.5	910A	LR1	12	9	30.2	N/A	N/A
E91		AA	2850	1.5	15A	LR6	14.5	23	50.5	N/A	N/A
E92		AAA	1250	1.5	24A	LR03	10.5	11.5	44.5	N/A	N/A
E93		C	8350	1.5	14A	LR14	26.2	66.2	50	N/A	N/A
E95		D	20500	1.5	13A	LR20	34.2	148	61.5	N/A	N/A
E96		AAAA	625	1.5	25A	LR8D425	8.3	6.5	42.5	N/A	N/A

ENERGIZER E90



Typical Dimensions

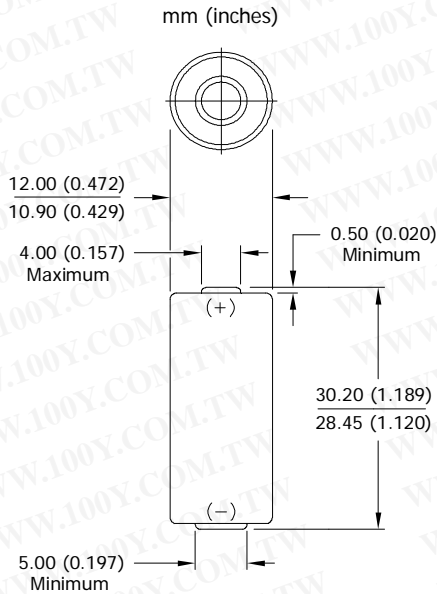


Specifications

- Classification:** Alkaline
- Chemical System:** Zinc-Manganese Dioxide (Zn/MnO₂)
No added mercury or cadmium
- Designation:** ANSI-910A, IEC-LR1
- Nominal Voltage:** 1.5 volts
- Nominal IR:** 150 to 300 milliohms (fresh)*
- Operating Temp:** -18°C to 55°C (0°F to 130°F)
- Typical Weight:** 9.0 grams (0.3 oz.)
- Typical Volume:** 3.3 cubic centimeters (0.2 cubic inch)
- Jacket:** Plastic Label
- Terminal:** Flat Contact

* For additional information, please reference the IR technical white paper.


Milliamp-Hours Capacity

Continuous discharge to 0.8 volts at 21°C

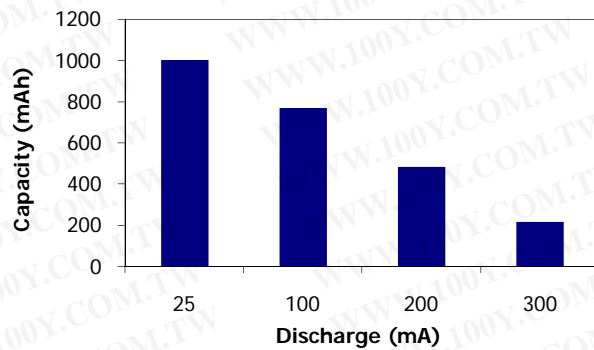


Industry Standard Tests (21°C)

LIGHTING
5.1 ohm 5 min/day

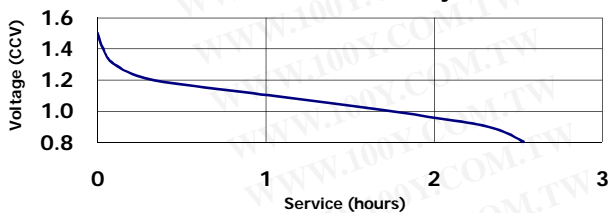


PAGER
3K/10 ohm 5 sec/hr 24 PPD/1 RPD

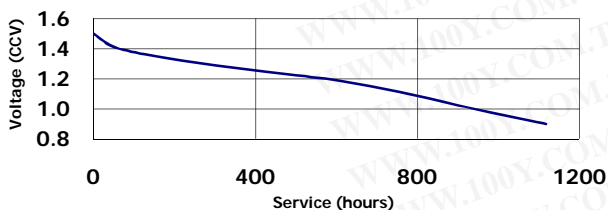

Constant Current Performance

Typical Characteristics (21°C)

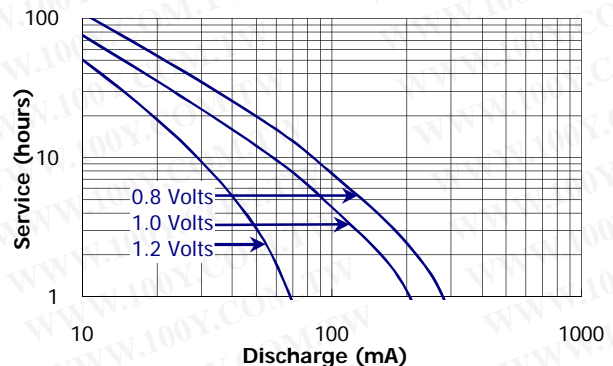

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


Important Notice

This data sheet contains typical information specific to products manufactured at the time of its publication.
 ©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.

ENERGIZER E91



Industry Standard Dimensions

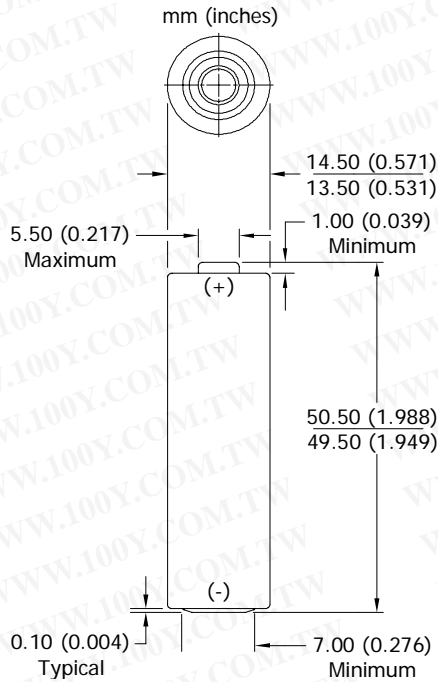


Specifications

Classification:	Alkaline
Chemical System:	Zinc-Manganese Dioxide (Zn/MnO ₂) No added mercury or cadmium
Designation:	ANSI-15A, IEC-LR6
Nominal Voltage:	1.5 volts
Nominal IR:	150 to 300 milliohms (fresh)*
Operating Temp:	-18°C to 55°C (0°F to 130°F)
Typical Weight:	23.0 grams (0.8 oz.)
Typical Volume:	8.1 cubic centimeters (0.5 cubic inch)
Jacket:	Plastic Label
Shelf Life:	7 years at 21°C (80% of initial capacity)
Terminal:	Flat Contact

* For additional information, please reference the IR technical white paper.

Milliamp-Hours Capacity


Continuous discharge to 0.8 volts at 21°C

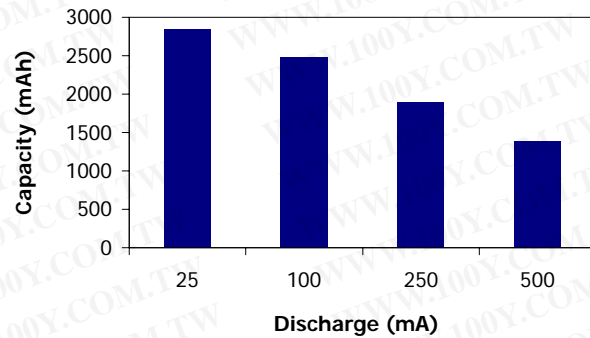

Device Selection Guide:

- Digital Camera 
- Photoflash 
- Games, CD's, MD's 
- Tape Player 
- Lighting 
- Toy 
- Remote Control 
- Radio 
- Clock 

Battery Selection Indicator

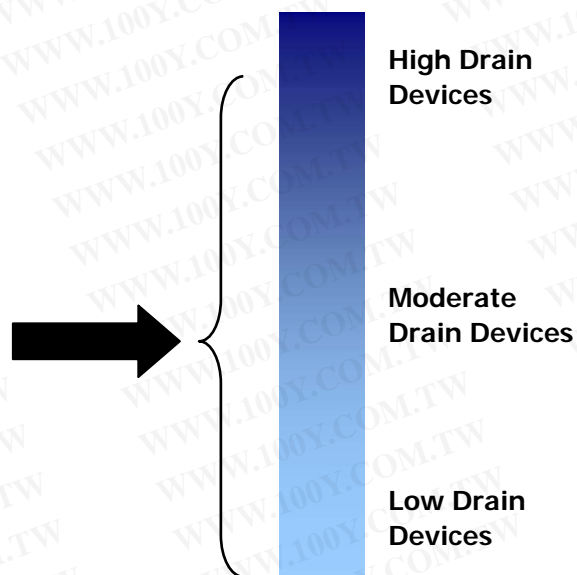

Important Notice


This data sheet contains typical information specific to products manufactured at the time of its publication.
 ©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.

ENERGIZER E91

AA


Constant Power Performance

Typical Characteristics (21°C)

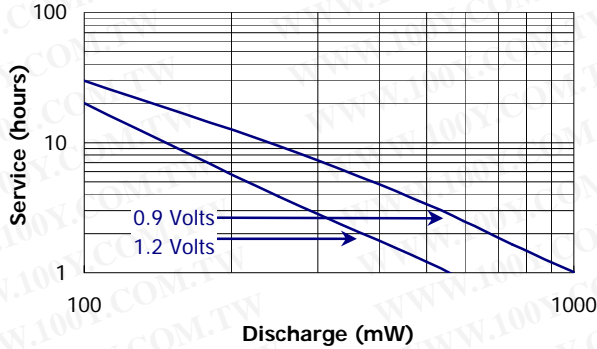


Constant Current Performance

Typical Characteristics (21°C)

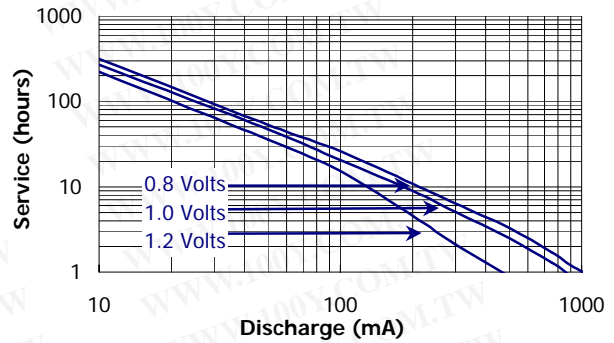


Constant Power Performance

Discharge Characteristics (21°C)




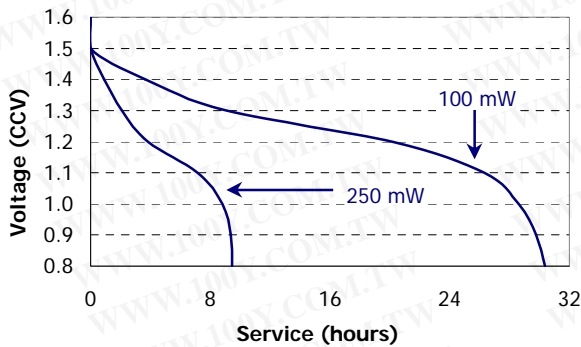


Constant Current Performance

250 mA Discharge (-20°C / 0°C / 21°C)

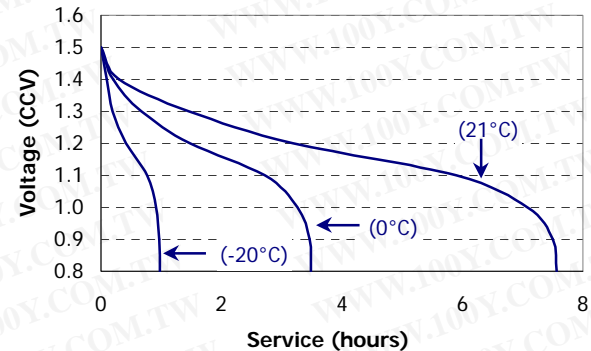

Industry Standard Tests (21°C)

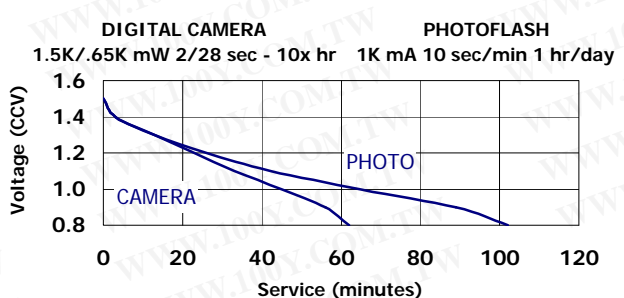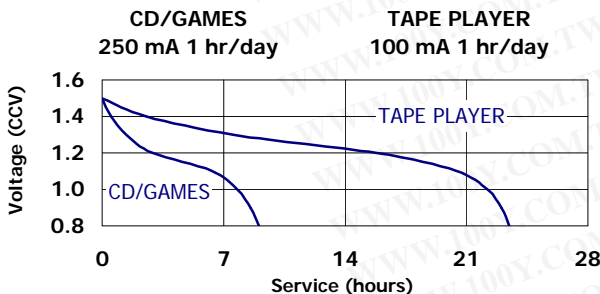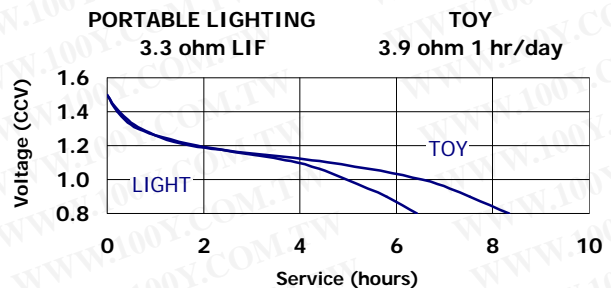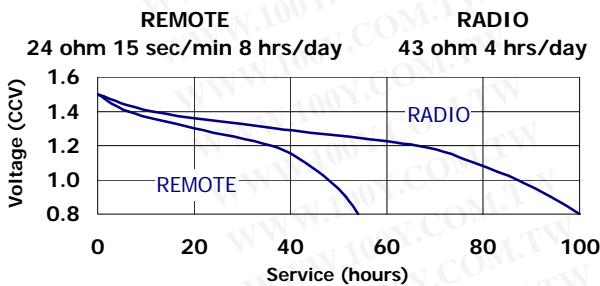

Important Notice

This data sheet contains typical information specific to products manufactured at the time of its publication.
 ©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.

ENERGIZER E92

AAA




Specifications

Classification:	Alkaline
Chemical System:	Zinc-Manganese Dioxide (Zn/MnO ₂) No added mercury or cadmium
Designation:	ANSI-24A, IEC-LR03
Nominal Voltage:	1.5 volts
Nominal IR:	150 to 300 milliohms (fresh)*
Operating Temp:	-18°C to 55°C (0°F to 130°F)
Typical Weight:	11.5 grams (0.4 oz.)
Jacket Volume:	3.8 cubic centimeters (0.2 cubic inch)
Jacket:	Plastic Label
Shelf Life:	7 years at 21°C (80% of initial capacity)
Terminal:	Flat Contact


* For additional information, please reference the IR technical white paper.

Industry Standard Dimensions

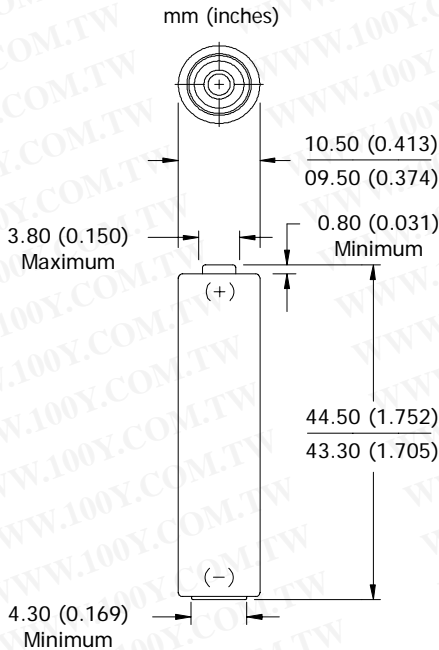

Milliamp-Hours Capacity


Continuous discharge to 0.8 volts at 21°C

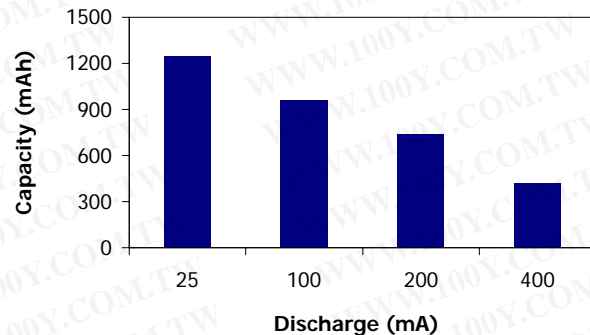

Device Selection Guide:

Battery Selection Indicator

- Photoflash
- Games, Digital Audio
- Lighting
- Remote Control
- Radio

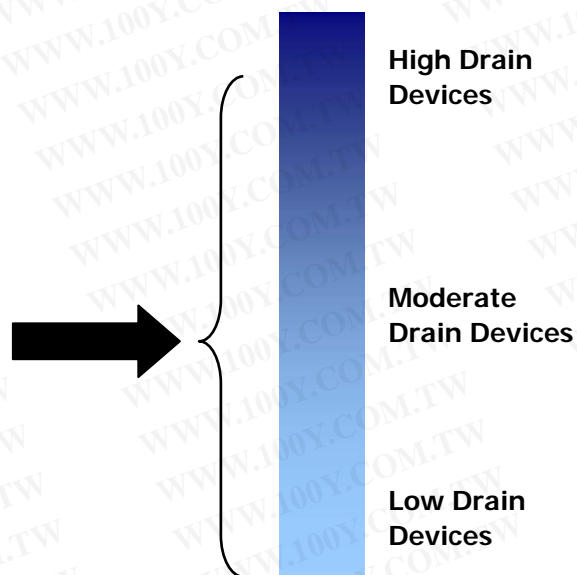

Important Notice


This data sheet contains typical information specific to products manufactured at the time of its publication.
 ©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.

ENERGIZER E92

AAA


Constant Power Performance

Typical Characteristics (21°C)

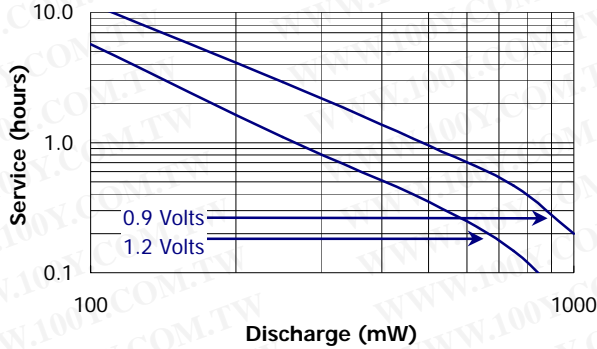


Constant Current Performance

Typical Characteristics (21°C)

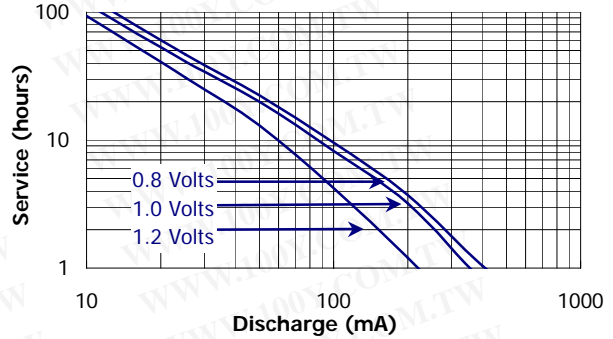


Constant Power Performance

Discharge Characteristics (21°C)

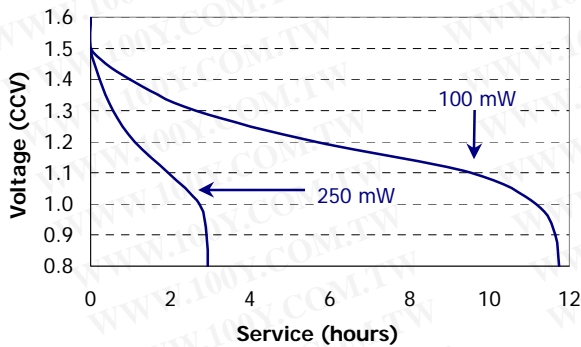


Constant Current Performance

250 mA Discharge (-20°C / 0°C / 21°C)

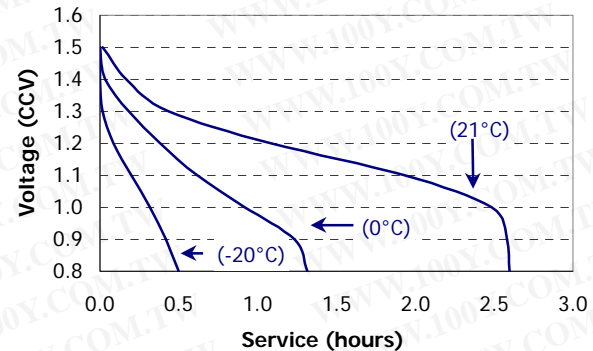


Industry Standard Tests (21°C)

LIGHTING
5.1 ohm LIF

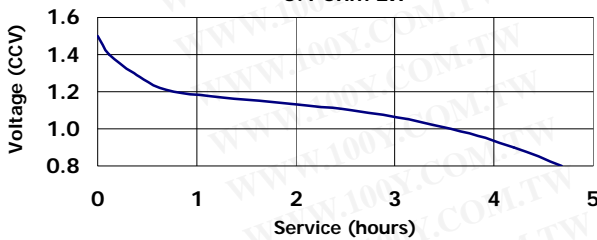


REMOTE

24 ohm 15 sec/min 8 hrs/day

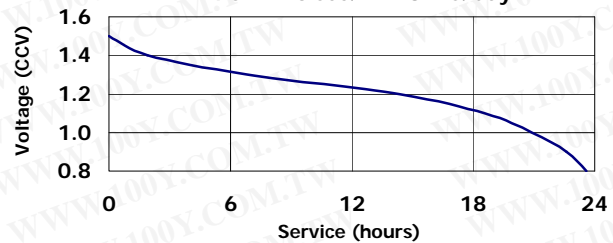


TAPE-GAME-DIGITAL AUDIO
100 mA 1 hr/day

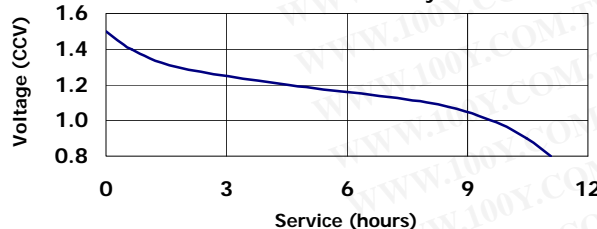

PHOTOFLASH

600 mA 10 sec/min 1 hr/day

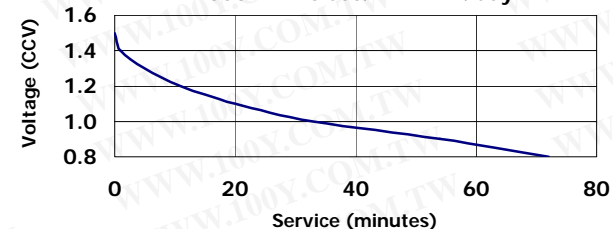

Important Notice

This data sheet contains typical information specific to products manufactured at the time of its publication.


©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.

ENERGIZER E96

AAAA



Industry Standard Dimensions

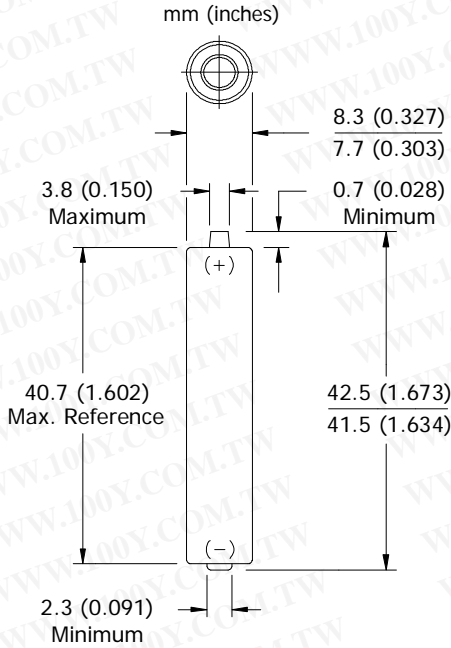


Specifications

Classification:	Alkaline
Chemical System:	Zinc-Manganese Dioxide (Zn/MnO ₂) No added mercury or cadmium
Designation:	ANSI-25A, IEC-LR8D425
Nominal Voltage:	1.5 volts
Nominal IR:	150 to 300 milliohms (fresh)*
Operating Temp:	-18°C to 55°C (0°F to 130°F)
Typical Weight:	6.5 grams (0.2 oz.)
Typical Volume:	2.2 cubic centimeters (0.1 cubic inch)
Jacket:	Plastic Label
Shelf Life:	5 years at 21°C (80% of initial capacity)
Terminal:	Flat Contact

* For additional information, please reference the IR technical white paper.

Milliamp-Hours Capacity

Continuous discharge to 0.8 volts at 21°C

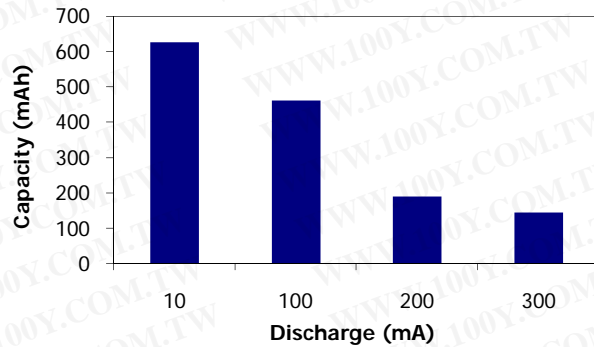


Device Selection Guide:

Tape Player

Lighting

Laser pointer

Battery Selection Indicator

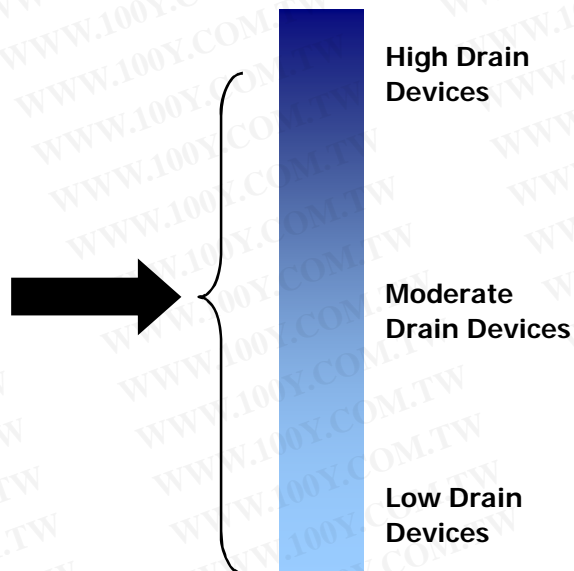

Important Notice


This datasheet contains typical information specific to products manufactured at the time of its publication.
 ©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.

ENERGIZER E96

AAAA


Constant Resistance Performance

Typical Characteristics (21°C)

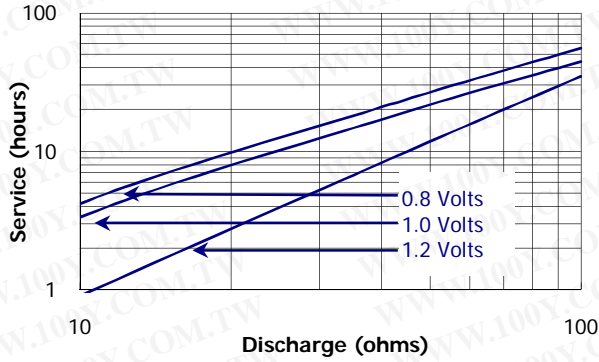


Constant Current Performance

Typical Characteristics (21°C)

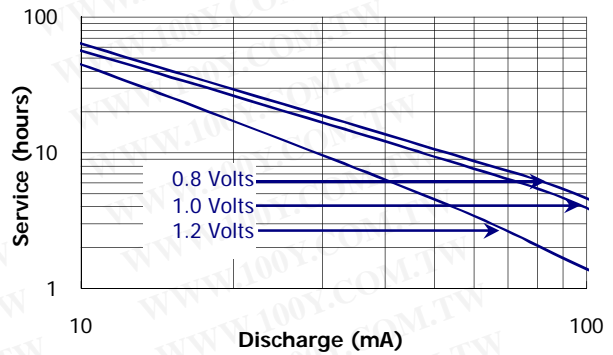

Constant Power Performance


Typical Characteristics (21°C)

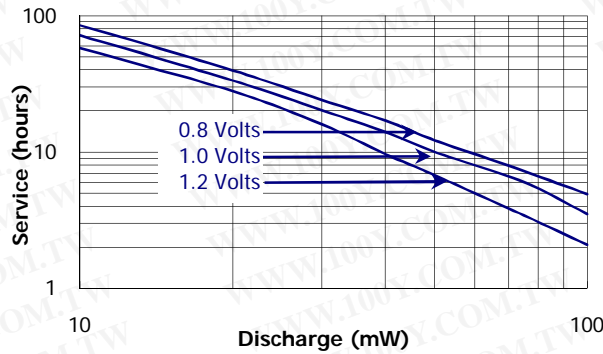


勝特力材料 886-3-5753170
 胜特力电子(上海) 86-21-54151736
 胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Industry Standard Tests (21°C)

LASER POINTER
75 ohm 1 hr/day

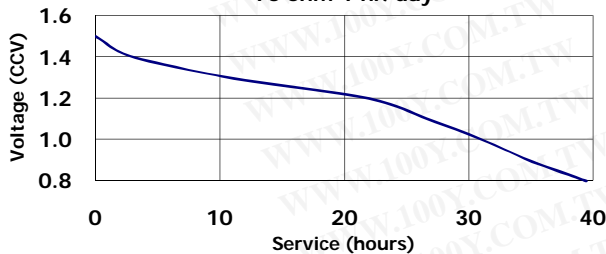

LIGHTING
3.9 ohm LIF

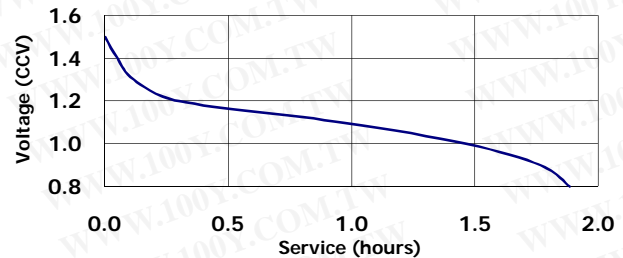

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.
 ©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.