

SEKIDAI

Issue No. :2006082401

Date of Issue Aug.24.2006

Classification ☒ New ☐ Changed

PRODUCT SPECIFICATION FOR APPROVAL

Product Description : 3mm Square SMT Trimmer Potentiometers

Product Part Number : EVM3ESX50B**

Country of Origin : JAPAN

Applications : Standard Components for Generalized Electric Equipment

*If you approve this specification, please fill in and sign the below and return 1 copy to us.

Approval No :

Approval Date :

Executed by :

(signature)

Title :

Dept. :

Circuit Components Business Unit
Panasonic Electronic Devices Co., Ltd.

401 Sadamasa-cho,
Fukui City 910-8502 Japan

Phone : +81-776-56-8034

Fax : +81-776-56-3114

Prepared by : Engineering Section

Contact Person:

Signature

Name(Print)

Title :

Authorized by :

Signature

Name(Print)

Title : Manager of Engineering

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Panasonic

1 Part Numbering System

EVM	3ES	X50	B13
A	B	C	D

A:Product Code
C:Packaging Spec.

B:Type and Construction
D:Taper and Resistance

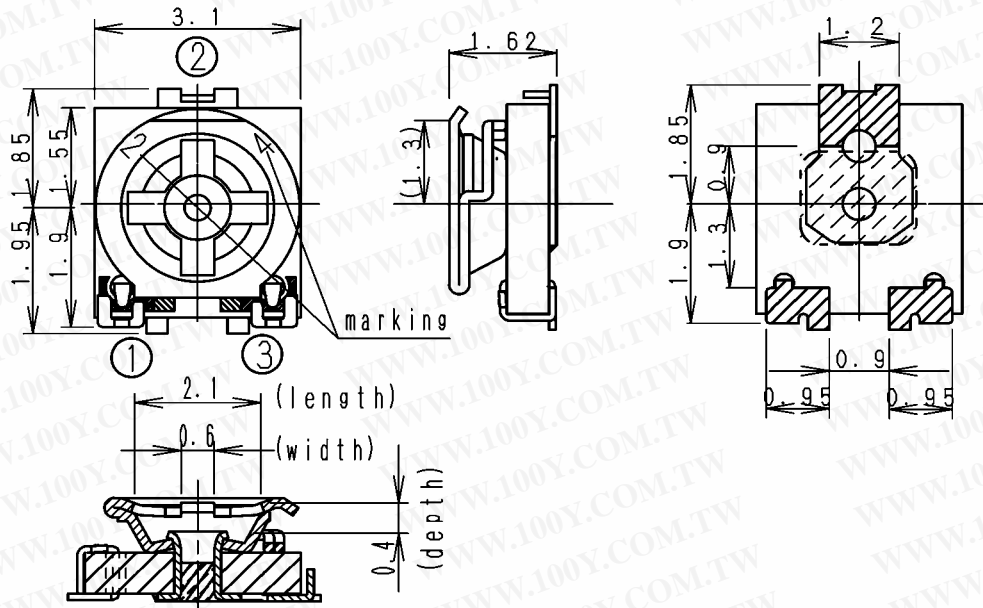
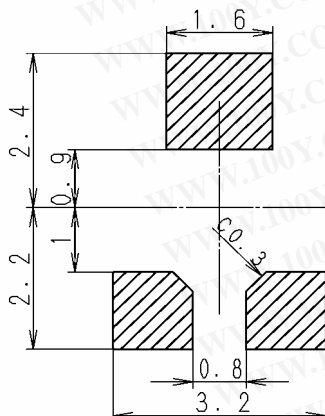
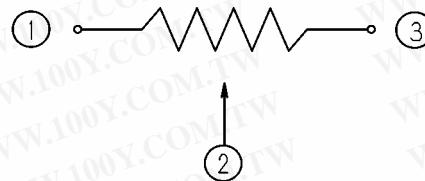
2 Appearance and Shape

2.1 Marking

Nominal Total Resistance shall be marked by 2 digits.
Please refer to table noted right side.

Nominal Total Resistance	Marking
100 ohm	12
1 k ohm	13
10 k ohm	14
1 M ohm	16

2.2 Dimensions in mm(not to scale)

General Tolerance ± 0.3 Recommended Land PatternCircuit Diagram

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Part Name
3mm Square Trimmer Potentiometers

Issue

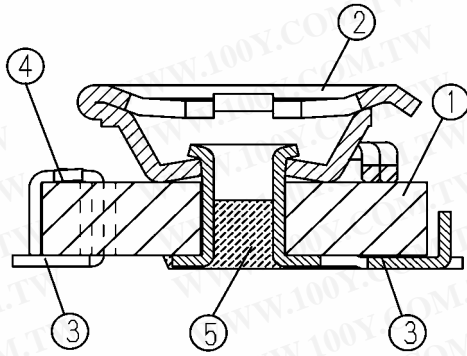
Revisions

Part No.
EVM3ESX50B**

Drawing No.
EVM3ESE00 4

1/10

2.3 Constructions and Part List



NO	Parts	Materials	Notes
1	Resistor Base	Base Alumina Resist. Metalgraze	
2	Brush	Stainless Steel	
3	Terminal	Stainless Steel	Tin Plating
4		Solder	Tin, Silver, Copper Alloy Solder
5	Coating	UV Resin	

3 Performance

3.1 Rating

Item	Performance	Remarks
Power Rating	0.15 W For potentiometers operated in ambient temperature above 70 deg.C , Power Rating shall be derated in accordance with the figure at right.	<p>Power Derating Curve</p> <p>Voltage Rating</p> $E = \sqrt{P \times R}$ <p>E: Voltage Rating(V) P: Power Rating(W) R: Nominal Total Resistance (ohm)</p>
Maximum Operating Voltage	50 V [DC]	
Voltage Rating	Voltage Rating should be Maximum Operating Voltage when E shall exceed Maximum Operating Voltage.	
Operating Temperature Range	-40 deg.C to 100 deg.C	
Nominal Total Resistance	100 ohm to 1 M ohm	
Tolerance of Total Resistance	$\pm 25\%$	

Part Name
3mm Square Trimmer Potentiometers

Issue

Revisions

Part No.
EVM3ESX50B**Drawing No.
EVM3ESE00 4

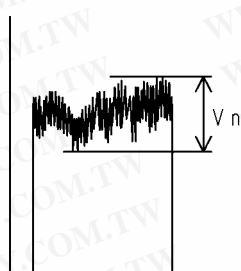
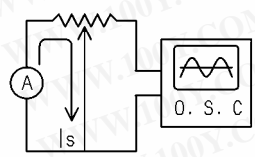
2/10

Panasonic Electronic Devices Co., Ltd.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

3.2 Characteristics


3.2.1 Electrical Characteristics

Item	Performance	Test Methods								
Resistance Law	0B (Linear)	Conforming to JIS C 5260-1 4.9								
Minimum Resistance	Shall be below 2 % of Nominal Total Resistance.	Conforming to JIS C 5260-1 4.7								
Temperature Coefficients of Resistance	Shall be within ± 250 ×10 ⁻⁶ /deg.C	Conforming to JIS C 5260-1 2.2.19								
Sliding Noise	<p>Shall be below 5 % of Nominal Total Resistance.</p> $\frac{V_n / I_s}{R} \times 100 \leq 5 \%$ <p>V_n :Noise voltage I_s : Test current R :Nominal Total Resistance</p>  <p>Noise voltage</p>	<p>Conforming to JIS C 5260-1 4.15 method B.</p> <p>Constant current power source</p>  <p>Oscilloscope or X-Y recorder</p> <p>Except both terminations. Operating rate of actuator at measurement 5 s/cycle to 15 s/cycle</p> <p>Test current I_s = 100×a / R(mA)</p> <table><tr><td>R: Nominal Total Resistance</td><td>a</td></tr><tr><td>less than 10 k ohm</td><td>10</td></tr><tr><td>more than 10 k ohm and less than 1 M ohm</td><td>100</td></tr><tr><td>more than 1 M ohm</td><td>1000</td></tr></table>	R: Nominal Total Resistance	a	less than 10 k ohm	10	more than 10 k ohm and less than 1 M ohm	100	more than 1 M ohm	1000
R: Nominal Total Resistance	a									
less than 10 k ohm	10									
more than 10 k ohm and less than 1 M ohm	100									
more than 1 M ohm	1000									

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Part Name 3mm Square Trimmer Potentiometers	Issue	Revisions
Part No. EVM3ESX50B**	Drawing No. EVM3ESE00 4	3/10

3.2.2 Mechanical Characteristics

Item	Performance	Test Methods
Angle of Rotation	Electrically Effective Range 260 ° ±20 °	Conforming to JIS C 5260-1 4.4.6
Rotation Torque	2 mN·m to 20 mN·m	Conforming to JIS C 5260-1 4.18
Adhesion	No damage on appearance, mechanical and electrical performance.	<ul style="list-style-type: none"> After mounting SMD at recommended land pattern on the test printed wiring board.  <p>Apply the pressure in two direction for each time 10 s as illustrated above.</p>
Resistance to Vibration	$\frac{\Delta V_{12}}{V_{13}} \times 100 \leq \pm 2$ <p>V_{13} :Input voltage (terminal 1-3) V_{12} :Output voltage (terminal 1-2) ΔV_{12} : change of V_{12}</p>	<ul style="list-style-type: none"> Frequency range : 10 Hz to 55 Hz Peak to peak amplitud: 1.5 mm Sweeping : 5 min/cycle Test duration : 2 h in each directions(X,Y,Z) (6 h in total) Brush setting point : middle point
Shock	$\frac{\Delta V_{12}}{V_{13}} \times 100 \leq \pm 2$ <p>V_{13} :Input voltage (terminal 1-3) V_{12} :Output voltage (terminal 1-2) ΔV_{12} : change of V_{12}</p>	<ul style="list-style-type: none"> Wave form : Half-sine pulse Peak acceleration : 981 m/s² Duration of pulse : 6 ms Number of times : 3 times in each directions(X,Y,Z) (18 times in total) Brush setting point : middle point
Resistance to Soldering Heat	Total resistance change shall be within ± 2 % of initial value and no damage on apperance.	<p>Conforming to 4.1 Mounting Notes,Soldering Method(1).</p> <ul style="list-style-type: none"> Number of times : 1 time
Solderability	New solder should be wet on the electrode and be raised, and wet angle of the solder should be less than 90degree.	<p>Reflow soldering should be done on the print board for the test by the recommended land pattern.</p> <ul style="list-style-type: none"> Solder paste :Sn-3.0Ag-0.5Cu(RMAtype) Paste thickness :150 μm Reflow conditions :Peak-temp. 250 deg.C maximum 230 deg.C or more time 30 s to 40 s

Part Name 3mm Square Trimmer Potentiometers	Issue	Revisions
Part No. EVM3ESX50B**	Drawing No. EVM3ESE00 4	4/ 10

Panasonic Electronic Devices Co., Ltd.

勝特力材料 886-3-5753170
勝特力電子(上海) 86-21-54151736
勝特力電子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

3.2.3 Environmental Characteristics

Item	Performance	Test Methods
Resistance to Cold	Total resistance change shall be within $\pm 5\%$ of initial value.	Test temperature : $-40\text{ deg.C} \pm 3\text{ deg.C}$ Test duration : $96\text{ h} \pm 4\text{ h}$ Brush setting point : middle point
Resistance to Heat	Total resistance change shall be within $\pm 5\%$ of initial value.	Test temperature : $70\text{ deg.C} \pm 2\text{ deg.C}$ Test duration : $500\text{ h} \pm 12\text{ h}$ Brush setting point : middle point
Change of Temperature	Total resistance change shall be within $\pm 5\%$ of initial value.	Low temperature : $-40\text{ deg.C} \pm 3\text{ deg.C}$ 30 min High temperature : $85\text{ deg.C} \pm 2\text{ deg.C}$ 30 min Room temperature : 5 min Number of temperature change cycle : 50 cycle Brush setting point : middle point
Resistance to Damp, Heat	Total resistance change shall be within $\pm 5\%$ of initial value.	Test temperature : $60\text{ deg.C} \pm 2\text{ deg.C}$ Relative humidity : 90 %RH to 95 %RH Test duration : $500\text{ h} \pm 12\text{ h}$ Brush setting point : middle point
Endurance (Under Damp Load)	Total resistance change shall be within $\pm 5\%$ of initial value.	Test temperature : $60\text{ deg.C} \pm 2\text{ deg.C}$ Relative humidity : 90 %RH to 95 %RH Test duration : $500\text{ h} \pm 12\text{ h}$ Load : Votage Rating Loading method : 1.5 h on and 0.5 h off (across terminations 1 and 3) Brush setting point : middle point
Endurance (Under Rated Load)	Total resistance change shall be within $\pm 5\%$ of initial value.	Test temperature : $70\text{ deg.C} \pm 2\text{ deg.C}$ Test duration : $500\text{ h} \pm 12\text{ h}$ Load : Votage Rating Loading method : 1.5 h on and 0.5 h off (across terminations 1 and 3) Brush setting point : middle point
Endurance (To Sliding)	Total resistance change shall be within $\pm 15\%$ of initial value.	Number of test revolution : 20 revolution (without electrical load) Revolutional speed : 5 /min to 10 /min One revolution means more than 90 % of the total electrical range.

3mm Square Trimmer Potentiometers	Issue		Revisions	
	Drawing No.			
EVM3ESX50B**	EVM3ESE00		4	5/10

Panasonic Electronic Devices Co., Ltd.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

4 Application Notes

4.1 Mounting Notes

Reflow Soldering	<p>When reflow soldering, please observe below conditions.</p> <p>[Reflow Soldering Profile]</p> <div data-bbox="470 398 778 667"> <p>Temp. (deg.C)</p> <p>Time(s)</p> </div> <p>(A)Heat-up zone 1 Room-temp. to preheat zone: 30 s to 60 s</p> <p>(B)Preheat zone 140 deg.C to 180 deg.C : 60 s to 120 s</p> <p>(C)Heat-up zone 2 Preheat zone to 230 deg.C : 20 s to 40 s</p> <p>(D)Melting-heat zone Peak-temp. : 10 s max</p> <p>Refer to the following (230 deg.C or more) graph.</p> <p>(E)Cooling zone 200 deg.C to 100 deg.C 1 deg.C/s to 4 deg.C/s</p> <p>[Recommended condition]</p> <div data-bbox="363 790 778 1037"> <p>Peak Temp. (deg.C)</p> <p>Time(s)(230 deg.C or more)</p> </div> <p>(1)In case of reflow soldering, please measure actual temp. on the product surface and observe recommended condition described left.</p> <p>(2)In case of exceeding recommended condition, please consult with us before use.</p> <p>(3)The temp. strongly depends on measuring method of profile, please note how to do it.</p> <p>(4)In case that temp.changes by PWB size, mounting density and so on, please check them by each PWB.</p>
Manual Soldering	<p>When manual soldering, please observe below condition.</p> <ul style="list-style-type: none"> • Soldering iron : 20 W maximum • Soldering iron tip temperature : 280 deg.C maximum • Soldering time : 3 s maximum
Soldering Notes (1)	This trimmer potentiometer is available for reflow soldering and manual soldering only.
Soldering Notes (2)	Solder and flux dissipated on the surface of element and contactor cause fatal damage, therefore in case of making wash and rinse, please consult before use.

(2)Design PCB

When designing land pattern, please design it, in accordance with recommended land layout described in this production specifications for information.

(3)Mounting Notes

Mounting top side pressure loaded on the trimmer potentiometer shall be 4.9N maximum. Overload is afraid to cause fatal damage as transform or breakdown.

After soldering, solder ball or solder scrap may cause short between the land pattern, so please make enough insulation there.

(4)Adjustment Notes

Adjusting top side pressure loaded on the contactor shall be 4.9N maximum.

Overload is afraid to cause fatal damage as transform or breakdown of adjustment knob.

In case that the moving contact is set near the border portion between electrically effective and non-effective range, electrically non-effective and open range, be afraid to be deviation of setting value. So avoid the setting like this.

(5)Lock paint

Avoid applying any lockpaint otherwise intrusion or dissipation of the paint may cause contact detect. In case of being subjected to apply it, please avoid using adhesives that may generate corrosive gas.

part Name 3mm Square Trimmer Potentiometers	Issue	Revisions
Part No. EVM3ESX50B**	Drawing No. EVM3ESE00 4	6/10

Panasonic Electronic Devices Co., Ltd.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

4.2 Circuit Diagram Notes

(1) Power Rating

The Maximum value of electric power which can continuously dissipated from all area of a resistive element at the rated ambient temperature.

In general, rated power shall be registered in accordance with size & kind of them.

Please observe to use below rated power. Continuously dissipation is afraid to cause fatal damage, for example, deviation, firing, smoking.

(2) Influence of ambient temperature

Influence of ambient temperature can not be neglected for operating trim-pot in general case.

Please comply with power derated curve, in case of using it under the condition of exceeding specified power rating.

4.3 Mounting Notes

This trimmer potentiometer is not available for sealed type, so this is afraid to be influenced fatally under the following conditions.

(1) Corrosive gas atmosphere of Cl, H₂S, NH₃, NO_x, SO₂ and so on.

(2) Moisture atmosphere of waterdrop, dewdrop and so on.

(3) Water, Salt, oil, chemicals, solvents and so on.

(4) Atmosphere of direct solar radiation.

4.4 Storage Notes

Storage under the following condition should be avoided.

Be afraid to degrade some performances and soldering wettability.

(1) Temperature: less than -10 deg.C and more than 40 deg.C,

Relative humidity: more than 85 %.

(2) Atmosphere of corrosive gas.

(3) Long term storage of over 6 months after delivery.

(4) Atmosphere of direct solar radiation.

Please store the package without unsuitable load and stress.

While remaining some product after opening the package, any countermeasure of shutting moisture gas and so on, should be done.

4.5 Application Notes for electric equipments and instruments

Although enough care is taken to ensure trimmer potentiometer quality.

As life-end breakage mode, some fatal trouble might generate, such as spec-out resistance change, short or open circuits, abnormally generated heat.

So please review the affect of any single fault of a potentiometer in advance.

(1) The product specification for information ensures the quality of pre-set potentiometers.

For applying, please should evaluate this product under the condition built in the appliances.

(2) The troubles caused by applying this product under out-specification should not be warranted.

(3) When applying for high-excellent liability and security appliances, for example, traffic transportation equipments (train, auto vehicles, traffic-signal equipments), medical apparatus, aircraft, spacecraft, heating, firing, gas, rotating equipment, security equipment, atomic-power equipment, machine-tool, and so on.

Please make enough considerations to design fail-safe circuit system for safety as followings.

*To make a safety system by a protective circuit or a protective device.

*To make a safety system by the redundant circuit so that the single fault of a trimmer potentiometer does not cause a dangerous situation.

(4) In case of arising some questions on the safety of this product, please don't hesitate to contact with our company and further technical evaluation should be done.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Part Name		
3mm Square Trimmer Potentiometers	Issue	Revisions
Part No.	Drawing No.	7/10
EVM3ESX50B**	EVM3ESE00	4

5 Operation of product specification for information

(1) Please return one set specification as approval one with accepted stamp or sign, after confirming and checking it.

In case that it will not be returned, in spite of taking three months or more from issue date noted on the cover page of this specification.

We could estimate that it has been already accepted, so please consider to operate it.

(2) Changing the content of product of specification for information is to be performed after pre-coordination with customer.

When you confirm revision of this specification, the previous version shall lose its validity.

勝 特 力 材 料 886-3-5753170
 胜特力电子(上海) 86-21-54151736
 胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Part Name 3mm Square Trimmer Potentiometers	Issue	Revisions
Part No. EVM3ESX50B**	Drawing No. EVM3ESE00 4	8/10

NO	Part Number	Quantity/Reel
1	EVM3ESX50B** (W)	2000


NO	A	B	C	D	E	W 1	W 2
1	1 7 8	6 0	1 3	2 1	2	8 . 4	1 4 . 4
Tolerance	± 2	min.	± 0.2	± 0.8	± 0.5	$\begin{smallmatrix} +2 \\ -0 \end{smallmatrix}$	max.

Diagram illustrating the layout of a musical score, showing the arrangement of parts and their relative lengths:

- Space part**: The initial section, marked "not less than 10 pitches".
- Chip pieces**: The middle section, marked "not less than 10 pitches".
- Space part**: The section following the chip pieces, marked "not less than 10 pitches".
- Leader part**: The final section, marked "150 mm~300 mm".

The diagram also indicates the **End** and **Start** of the score.

Peeling strength of sealtape is 0.2 N~0.98 N



Part Name	3mm Square Trimmer Potentiometers
-----------	-----------------------------------

Issue

Revisions

Part No.Drawing No.4

9	
10	

Panasonic Electronic Devices Co., Ltd.

勝特力材料 886-3-5753170
勝特力電子(上海) 86-21-54151736
勝特力電子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

三角法/单位:mm

THE PART NUMBER CHART

NO	Customer Part No.	Resist	MATSUSHITA Part No.	Marking
24		33 k	EVM3ESX50BY4	Y4
25		47 k	EVM3ESX50BQ4	Q4
26		50 k	EVM3ESX50B54	54
27		68 k	EVM3ESX50BS4	S4
28		100 k	EVM3ESX50B15	15
29		150 k	EVM3ESX50BC5	C5
30		200 k	EVM3ESX50B25	25
31		220 k	EVM3ESX50BE5	E5
32		300 k	EVM3ESX50B35	35
33		330 k	EVM3ESX50BY5	Y5
34		470 k	EVM3ESX50BQ5	Q5
35		500 k	EVM3ESX50B55	55
36		680 k	EVM3ESX50BS5	S5
37		1 M	EVM3ESX50B16	16
38				
39				
40				
41				
42				
43				
44				
45				
46				

Panasonic Electronic Devices Co., Ltd.