

## FEATURE AND SPECIFICATIONS

SIZES 04 TO 30 PIN.

FOR 0.3mm THICKNESS FFC/FPC.

VOLTAGE:50V MAX.

CURRENT:0.5A MAX.

CONTACT RESISTANCE:20 milliohms MAX.

INSULATION RESISTANCE:50 Megohms MIN.

DIELECTRIC WITHSTANDING VOLTAGE:250V AC.

TEMPERATURE:-40°C TO 85°C

FPC RETENTION FORCE: PER PIN 0.3N(0.03Kgf) MIN

## MATERIAL AND FINISH


HOUSING:SEE ORDERING CODE

ACTUATOR:HIGH-TEMP. THERMOPLASTIC. UL 94V-0.

CONTACT:PHOSPHOR BRONZE.PLATING:SEE ORDERING CODE

HOLDDOWN:BRASS. PLATING:SEE ORDERING CODE

**勝特力材料 886-3-5753170**  
**勝特力电子(上海) 86-21-54151736**  
**勝特力电子(深圳) 86-755-83298787**  
[Http://www.100y.com.tw](http://www.100y.com.tw)

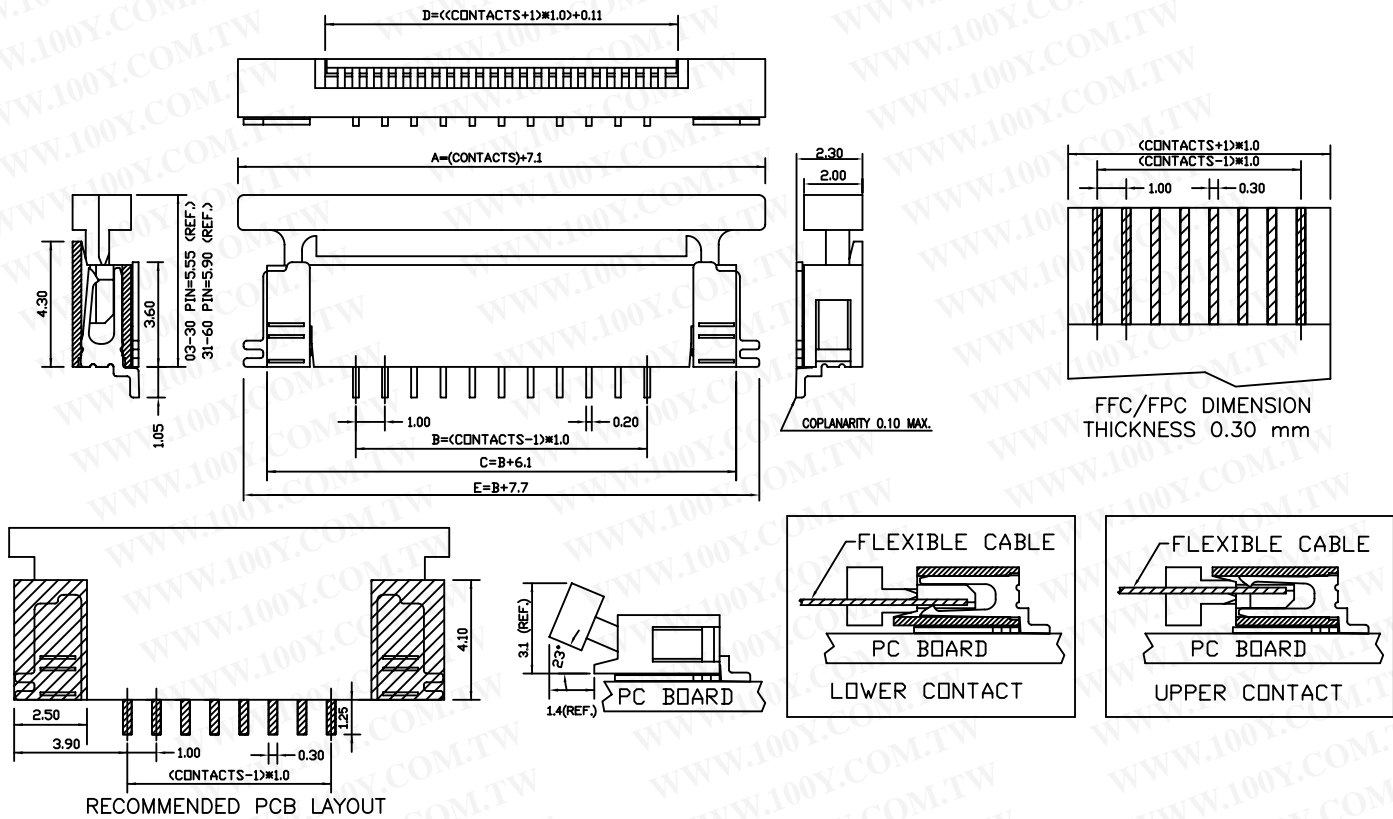

## HOW TO ORDER

