


圖號 . DRAWING. NO: FP3F6.4AF

校訂版次 REVISIONS

品名 NAME: Female

ITEM NO.:

版次	記述	DESCRIPTION	DATE	核可

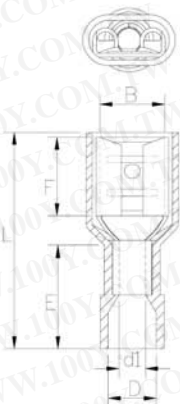

NOTE:

MAXIMUM ELECTRICAL RATING: 105 °C 300 VOLTS

F1-6.4AF

1. WIRE RANGE: AWG 22-16/0.5-1.5mm²: 10 AMPERE MAX.

2. INSULATED COLOR: RED

F2-6.4AF

1. WIRE RANGE: AWG 16-14/1.5-2.5mm²: 15 AMPERE MAX.

2. INSULATED COLOR: BLUE

F5-6.4AF

1. WIRE RANGE: AWG 12-10/4-6mm²: 24 AMPERE MAX.

2. INSULATED COLOR: YELLOW



產品編號 ITEM NO.	NEMA TAB	B ±0.20	F ±0.30	L ±1.00	E ±0.60	d1 ±0.20	D ±0.30
F1-6.4AF	0.8x6.4	6.6	7.9	22.0	10.5	1.7	4.2
F2-6.4AF	0.8x6.4			22.0		2.3	4.9
F5-6.4AF	0.8x6.4			24.5	13.0	3.4	6.5

認可 APPROVALS

製圖 DRAFT: Den

設計 DESIGN: 劉' r

核可 CHECKED: Chen

第三視角
THIRD VIEW

MATERIAL

INSULATION: NYLON

MATERIAL: BRASS

TIN PLATING

單位 UNITE

m / m

比例 SCALE

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)