


# **INSULATION DISPLACEMENT CABLE**

## **.025" PITCH, 32 AWG, STRANDED** **EXTRUDED FEP**

### **MECHANICAL CHARACTERISTICS**

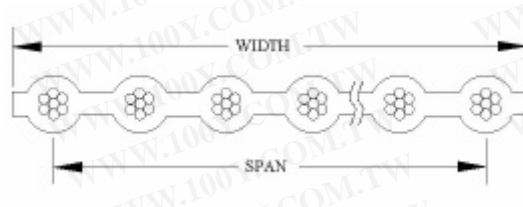

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

Number of Conductors	Span	Width
10	0.225 ± .005	0.250 ± .007
16	0.375 ± .005	0.400 ± .007
20	0.475 ± .005	0.500 ± .007
24	0.575 ± .005	0.600 ± .007
26	0.625 ± .005	0.650 ± .007
34	0.825 ± .005	0.850 ± .007
40	0.975 ± .006	1.000 ± .007
50	1.225 ± .006	1.250 ± .010
60	1.475 ± .006	1.500 ± .010
64	1.575 ± .006	1.600 ± .010
68	1.675 ± .006	1.700 ± .010
80	1.975 ± .006	2.000 ± .010
100	2.475 ± .006	2.500 ± .010

### **PHYSICAL CHARACTERISTICS**

Conductor Type	32 AWG, 7/40 Stranded, Silver Plated Copper
Insulation	FEP Extruded (-55° C to 200° C)
Number of Conductors	10 to 100
Color	Natural with Red Polarity Stripe

### **PACKAGING**

100 ft./Reel, 50 Ft. minimum average length, 10 Ft. minimum length

UL STYLE 20726