


SPECIFICATION

1. MATERIAL & FLASH/PLATED
 - 1.1 HOUSING: HIGH TEMP. THERMOPLASTIC.UL 94V-0.
 - 1.2 ACTUATOR: HIGH TEMP. THERMOPLASTIC.UL 94V-0.
 - 1.3 CONTACT: PHOAPHOR BRONZE. PLATING:TIN/LEAD.
 - 1.4 HOLDDOWN: BRASS. PLATING:TIN/LEAD.
2. CHARATERRISTICS
 - 2.1 VOLTAGE:50V MAX.
 - 2.2 CURRENT:0.5A MAX.
 - 2.3 CONTACT RESISTANCE:20 milliohms MAX.
 - 2.4 INSULATION RESISTANCE:50 Megohms MIN.
 - 2.5 DIELECTRIC WITHSTANDING VILTAGE:250V AC.
 - 2.6 TEMPERATURE:-40°C TO 85°D.
3. SIZES:03 TO 60 PIN.
4. FOR 0.3mm THICKNESS FFC/FPC.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

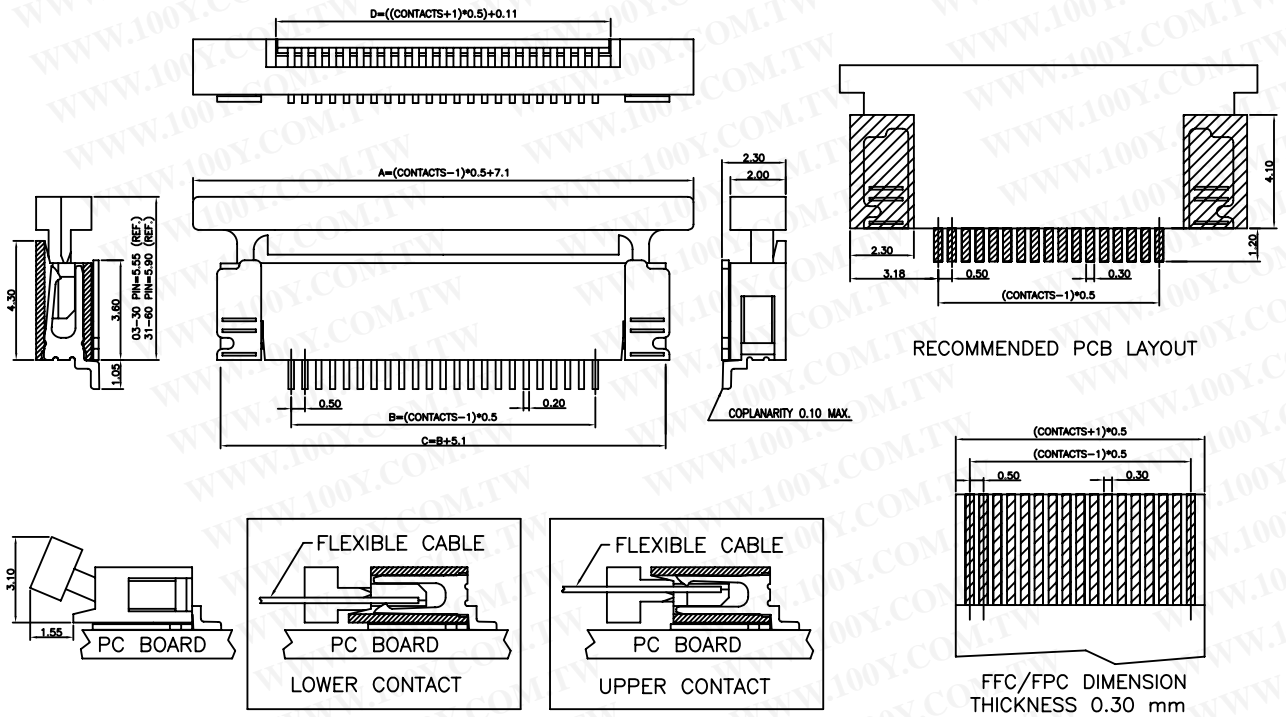

HOW TO ORDER

