

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

SPECIFICATION

DEVICE NAME : Power MOSFET

TYPE NAME : 2SK2850-01

SPEC. NO. : - - - - -

Fuji Electric Co.,Ltd.

This Specification is subject to change without notice.

| | | | | | |
|---------|------|------|----------|------------------------|-----|
| | DATE | NAME | APPROVED | Fuji Electric Co.,Ltd. | |
| DRAWN | | | | | |
| CHECKED | | | | | |
| | | | | DWG. NO. | 1/2 |

- 1.Scope This specifies Fuji Power MOSFET 2SK2850-01
- 2.Construction N-Channel enhancement mode power MOSFET
- 3.Applications for Switching
- 4.Outview TO-3P Outview See to 5/12 page

5.Absolute Maximum Ratings at Tc=25°C (unless otherwise specified)

| Description | Symbol | Characteristics | Unit | Remarks |
|---------------------------|------------------|-----------------|------|---------|
| Drain-Source Voltage | V _{DS} | 900 | V | |
| Continuous Drain Current | I _D | ±6 | A | |
| Pulsed Drain Current | I _{DP} | ±24 | A | |
| Gate-Source Voltage | V _{GS} | ±30 | V | |
| Maximum Avalanche Energy | E _{AV} | 277 | mJ | *1 |
| Maximum Power Dissipation | P _D | 125 | W | |
| Operating and Storage | T _{ch} | 150 | °C | |
| Temperature range | T _{stg} | -55 to +150 | °C | |

*1 L=14.1mH,Vcc=90V

6.Electrical Characteristics at Tc=25°C (unless otherwise specified)

Static Ratings

| Description | Symbol | Conditions | min. | typ. | max. | Unit |
|----------------------------------|---------------------|---|------|------|------|------|
| Drain-Source Breakdown Voltage | BV _{DSS} | I _D =1mA V _{GS} =0V | 900 | | | V |
| Gate Threshold Voltage | V _{GS(th)} | I _C =1mA V _{DS} =V _{GS} | 2.5 | 3.0 | 3.5 | V |
| Zero Gate Voltage Drain Current | I _{DSS} | V _{DS} =900V T _{ch} =25°C | | 10 | 500 | μA |
| | | V _{GS} =0V T _{ch} =125°C | | 0.2 | 1.0 | mA |
| Gate-Source Leakage Current | I _{GSS} | V _{GS} =±30V V _{DS} =0V | | 10 | 100 | nA |
| Drain-Source On-State Resistance | R _{DS(on)} | I _D =3A V _{GS} =10V | | 1.87 | 2.5 | Ω |

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Dynamic Ratings

| Description | Symbol | Conditions | min. | typ. | max. | Unit |
|------------------------------|--------------|--------------------------|------|------|------|------|
| Forward Transconductance | g_{fs} | $I_D=3A$ $V_{DS}=25V$ | 2.0 | 4.0 | | S |
| Input Capacitance | C_{iss} | $V_{DS}=25V$ | | 950 | 1450 | |
| Output Capacitance | C_{oss} | $V_{GS}=0V$ | | 140 | 210 | |
| Reverse Transfer Capacitance | C_{rss} | $f=1MHz$ | | 80 | 120 | pF |
| Turn-On Time | $t_{d(on)}$ | $V_{cc}=600V$ | | 20 | 30 | |
| | t_r | $V_{GS}=10V$ | | 50 | 80 | |
| Turn-Off Time | $t_{d(off)}$ | $I_D=6A$ | | 110 | 170 | ns |
| | t_f | $R_{GS}=10\Omega$ | | 60 | 90 | |

Reverse Diode

| Description | Symbol | Conditions | min. | typ. | max. | Unit |
|--------------------------|----------|--|------|------|------|---------|
| Avalanche Capability | I_{AV} | $L=100\mu H$ $T_{ch}=25^\circ C$ See Fig.1 and Fig.2 | 6 | | | A |
| Diode Forward On-Voltage | V_{SD} | $I_F=2 \times I_{DR}$ $V_{GS}=0V$ $T_{ch}=25^\circ C$ | | 1.0 | 1.5 | V |
| Reverse Recovery Time | t_{rr} | $I_F=I_{DR}$ | | 900 | | ns |
| Reverse Recovery Charge | Q_{rr} | $-di/dt=100A/\mu s$ $T_{ch}=25^\circ C$ | | 10 | | μC |

7. Thermal Resistance

| Description | Symbol | min. | typ. | max. | Unit |
|--------------------|----------------|------|------|------|--------------|
| Channel to Case | $R_{th(ch-c)}$ | | | 1.00 | $^\circ C/W$ |
| Channel to Ambient | $R_{th(ch-a)}$ | | | 35.0 | $^\circ C/W$ |

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Fig.1 Test Circuit


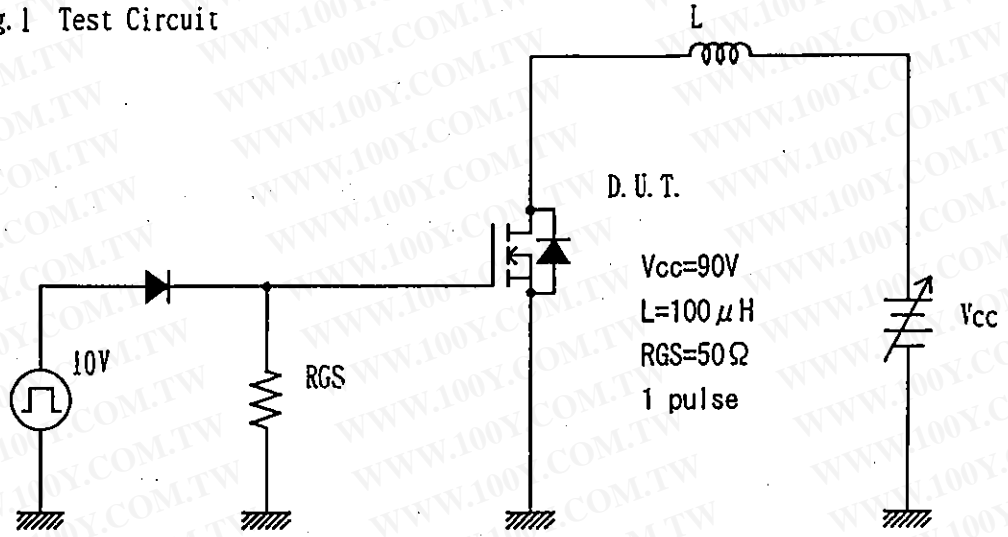



Fig.2 Operating waveforms

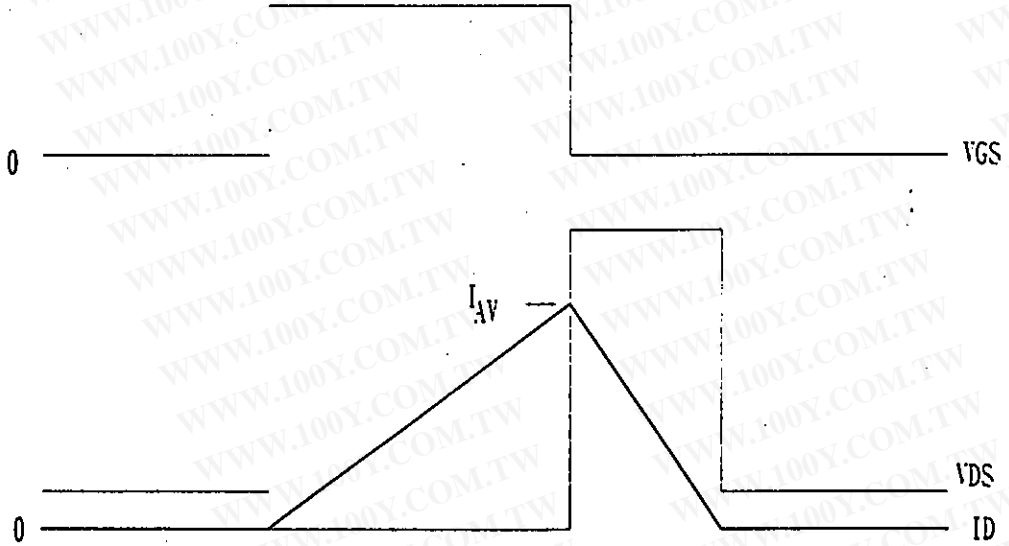


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
 Http://www.100y.com.tw

FUJI POWER MOS FET

TYPE : 2SK2850-01

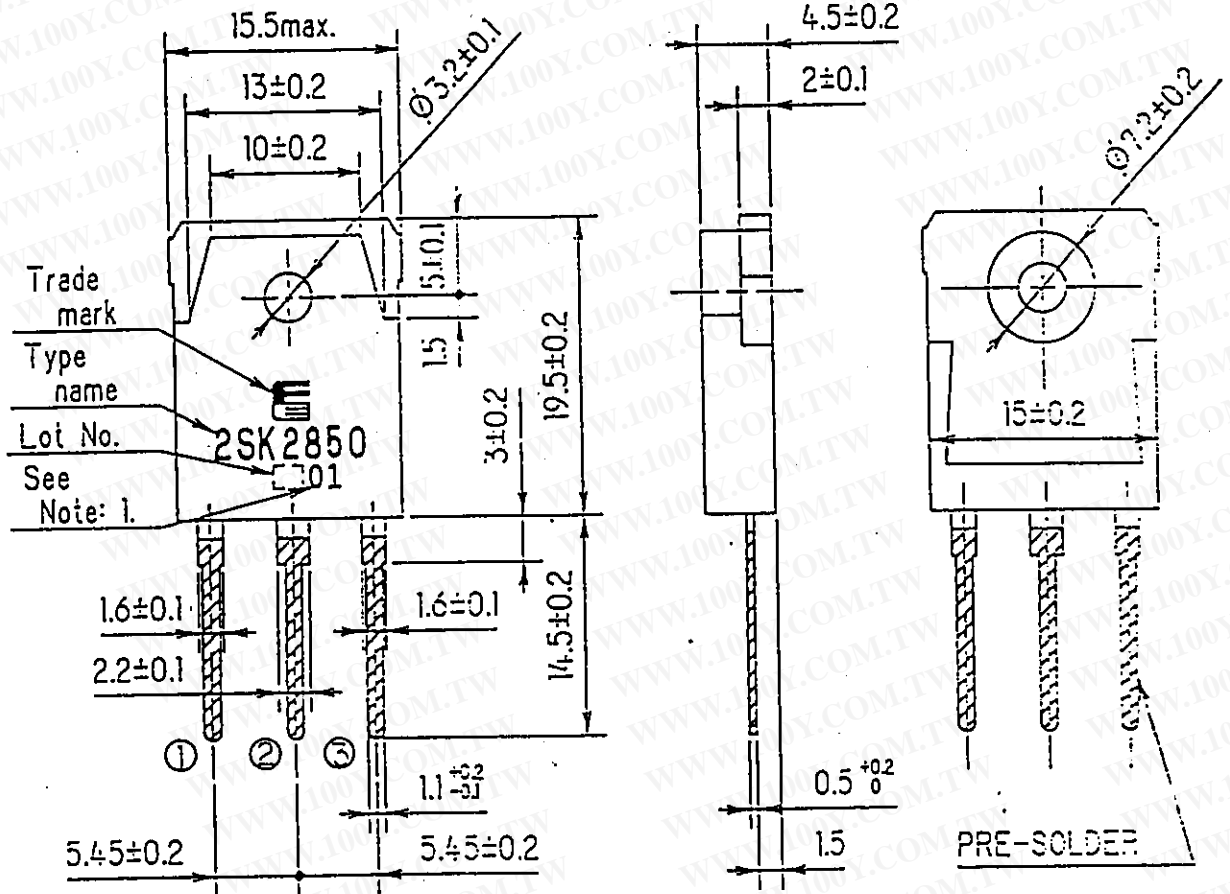

DIMENSIONS ARE IN MILLIMETERS.



CONNECTION

- ① GATE
- ② DRAIN
- ③ SOURCE

Note: 1. Guaranteed mark of avalanche ruggedness.

JEDEC : TO-247
EIAJ : SC-65


Fuji Electric Co.,Ltd

DWG.NO.


5/12

Y 0257-R-003a

Power Dissipation
 $PD=f(T_c)$

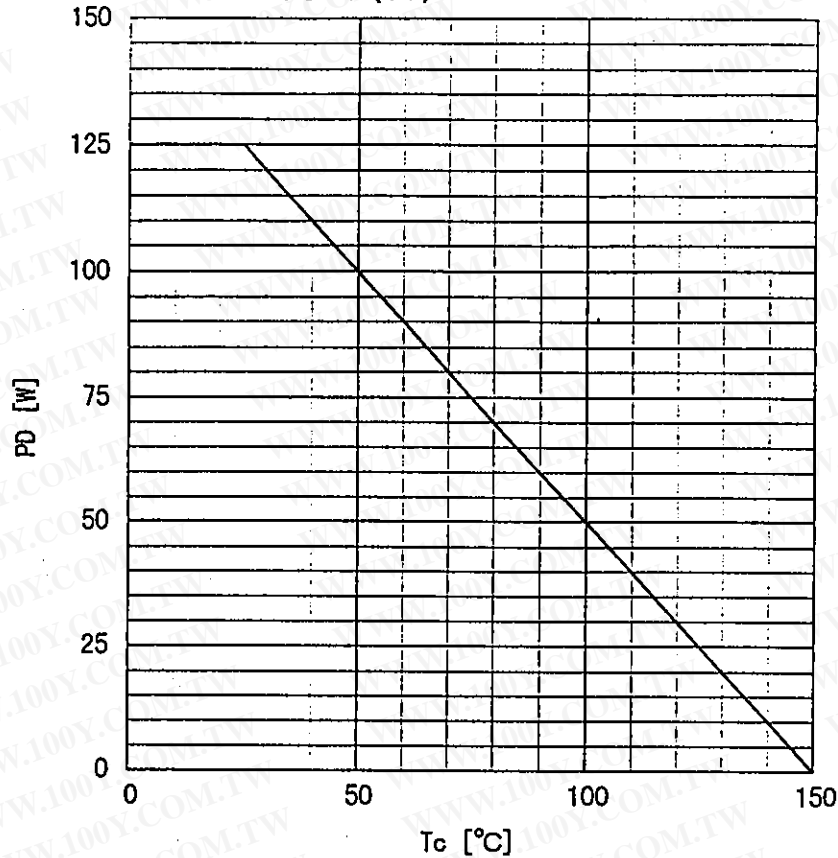


Safe operating area
 $ID=f(V_{DS}) : D=0.01, T_c=25^\circ C$

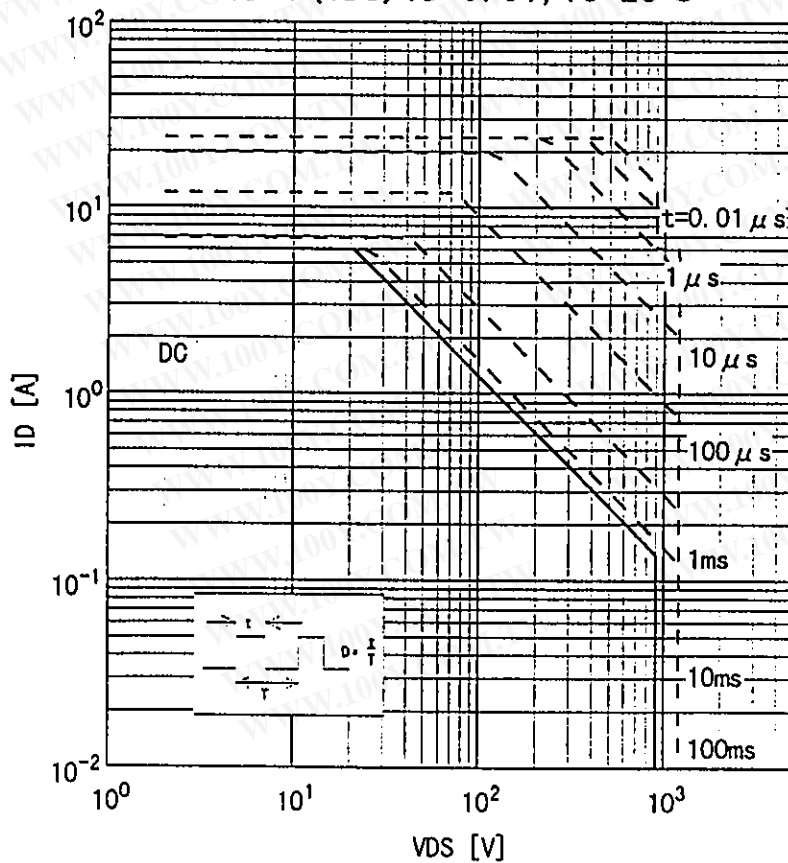


This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Typical output characteristics
 $I_D = f(V_{DS}) : 80 \mu s$ pulse test, $T_c = 25^\circ C$

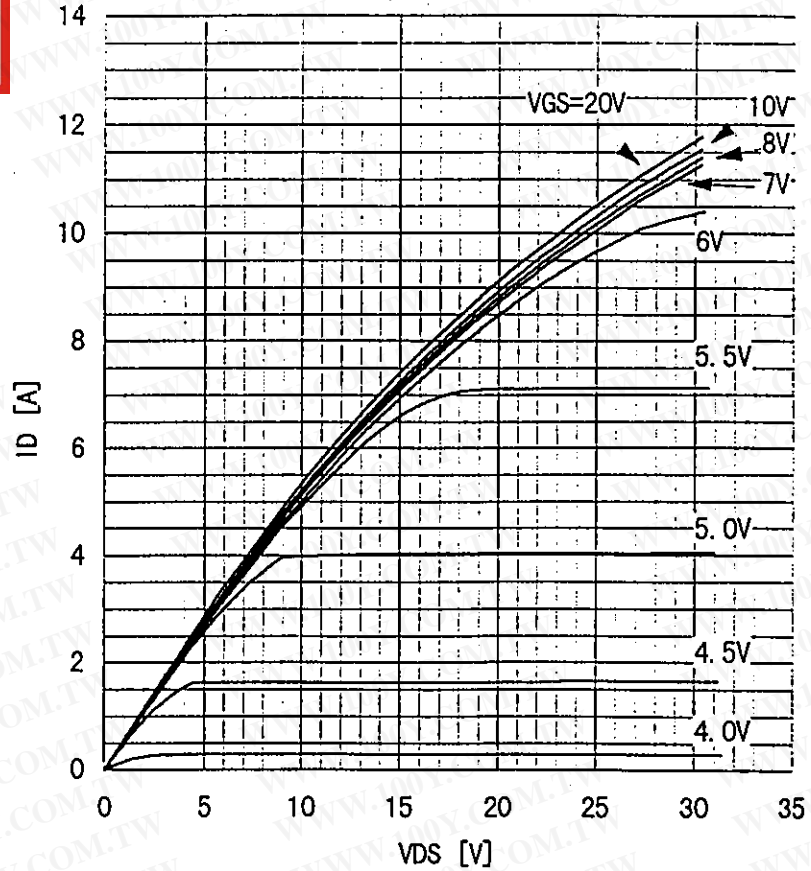


Typical transfer characteristic
 $I_D = f(V_{GS}) : 80 \mu s$ pulse test, $V_{DS} = 25V$, $T_{ch} = 25^\circ C$

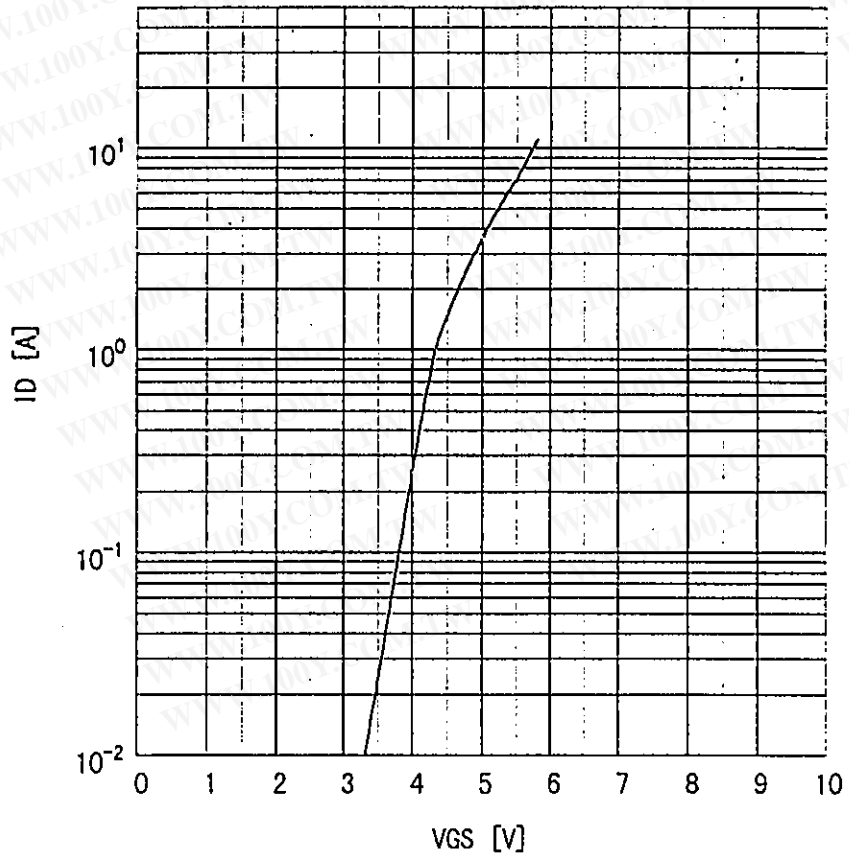


This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Typical forward transconductance
 $g_{fs}=f(I_D)$: $80\mu s$ pulse test, $V_{DS}=25V$, $T_{ch}=25^\circ C$

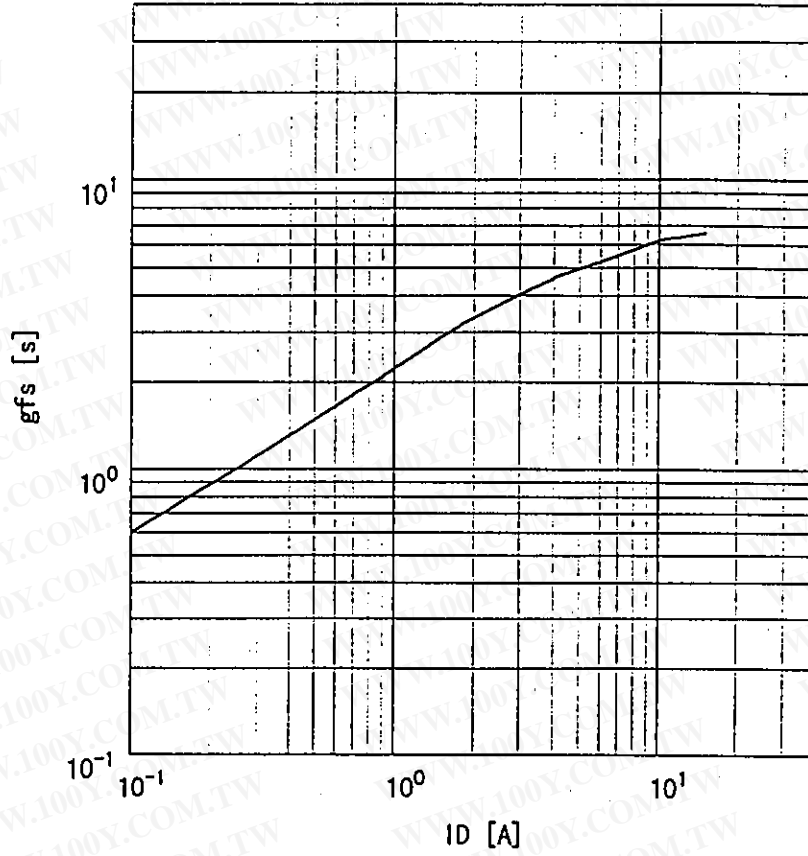

Typical drain-source on-state resistance
 $R_{DS(on)}=f(I_D)$: $80\mu s$ pulse test, $T_c=25^\circ C$

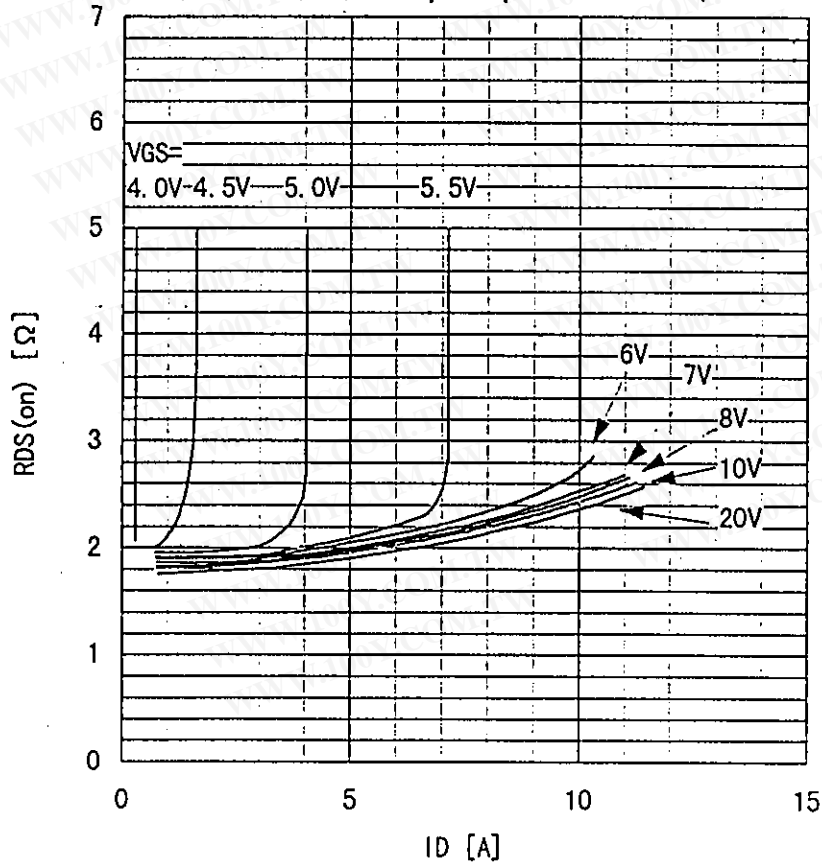


This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

This material and the information herein is the property of
 Fuji Electric Co., Ltd. They shall be neither reproduced, copied,
 lent, or disclosed in any way whatsoever for the use of any
 third party nor used for the manufacturing purposes without
 the express written consent of Fuji Electric Co., Ltd.


Drain-source on-state resistance
 $R_{DS(on)} = f(T_{ch}) : I_D = 3A, V_{GS} = 10V$

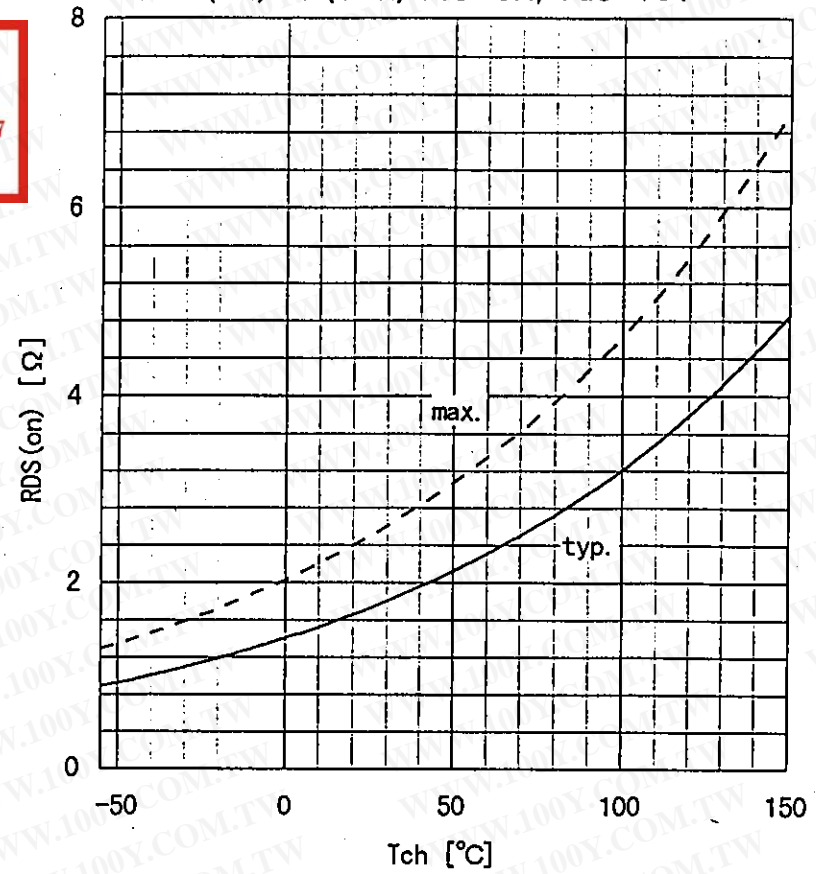


Gate threshold voltage
 $V_{GS(th)} = f(T_{ch}) : I_D = 1mA, V_{DS} = V_{GS}$

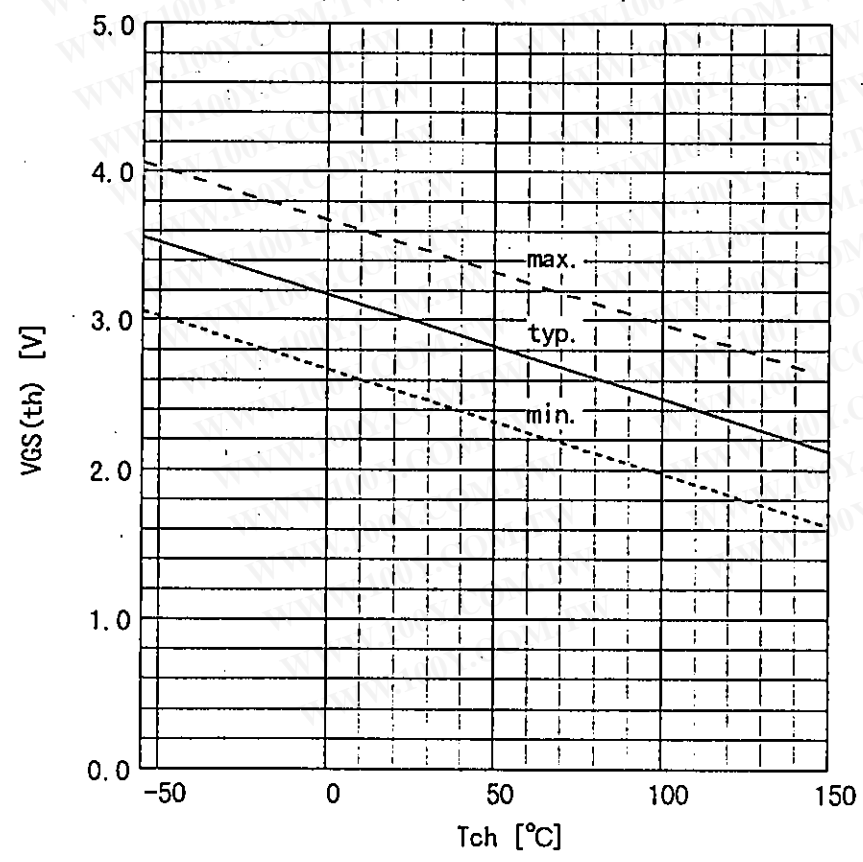

Typical gate charge characteristic
 $V_{GS} = f(Q_g) : I_D = 6A, T_c = 25^\circ C$

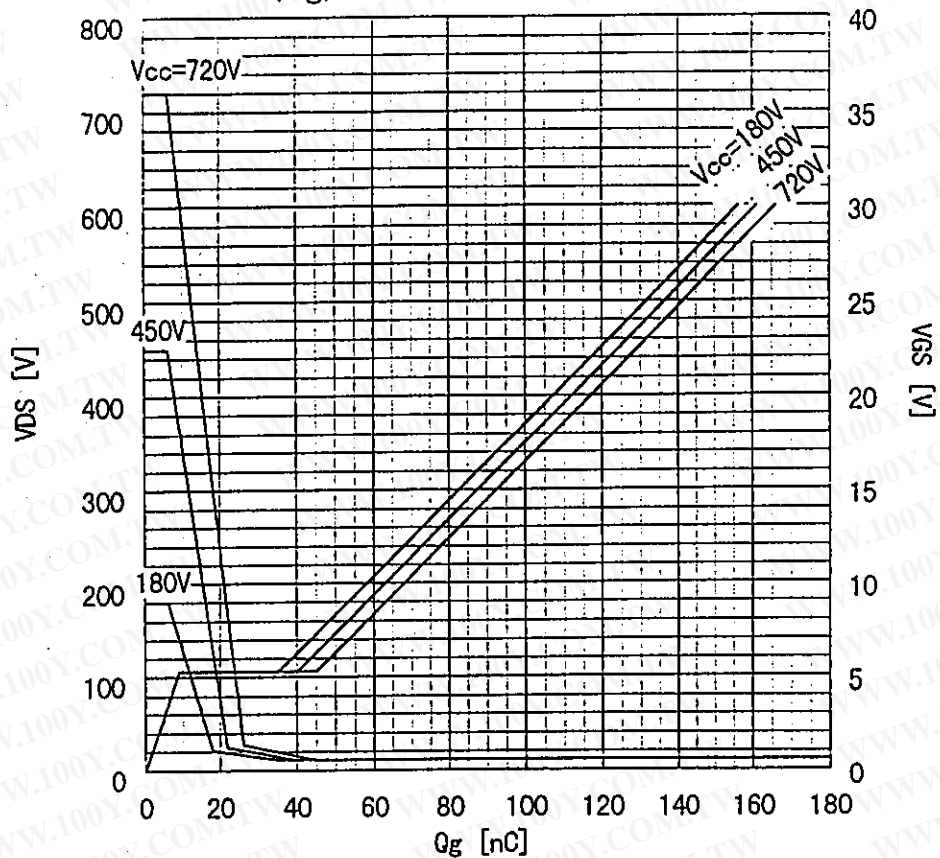


Typical capacitances
 $C = f(V_{DS}) : V_{GS} = 0V, f = 1MHz$

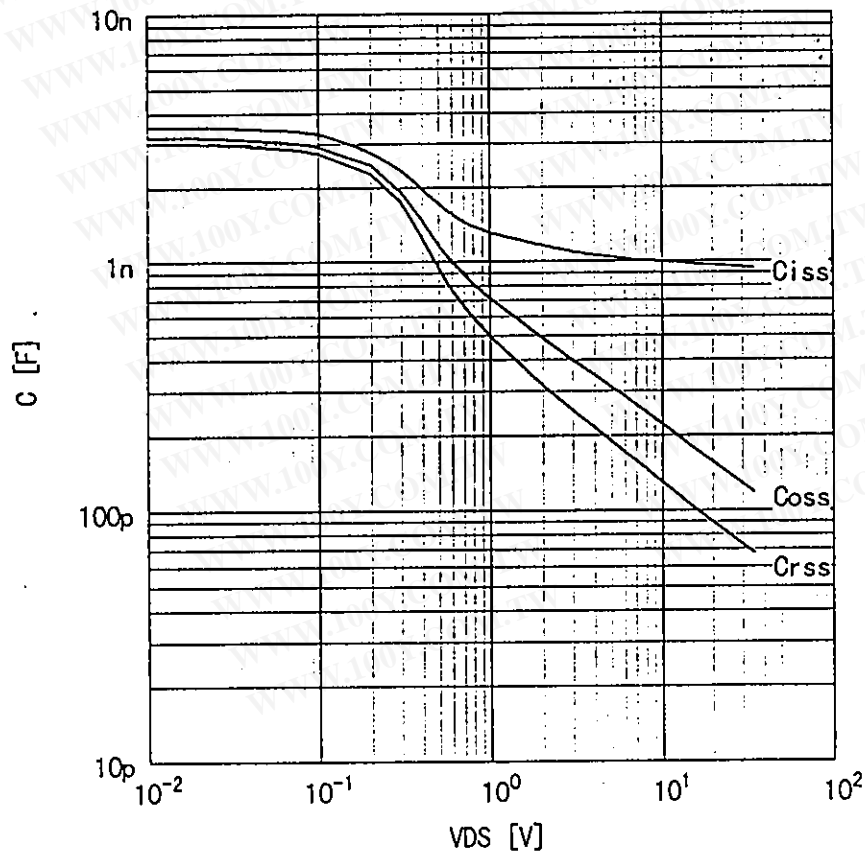


This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

Forward characteristic of reverse of diode
 $I_F = f(V_{SD}) : 80 \mu s$ pulses test, $V_{GS} = 0V$

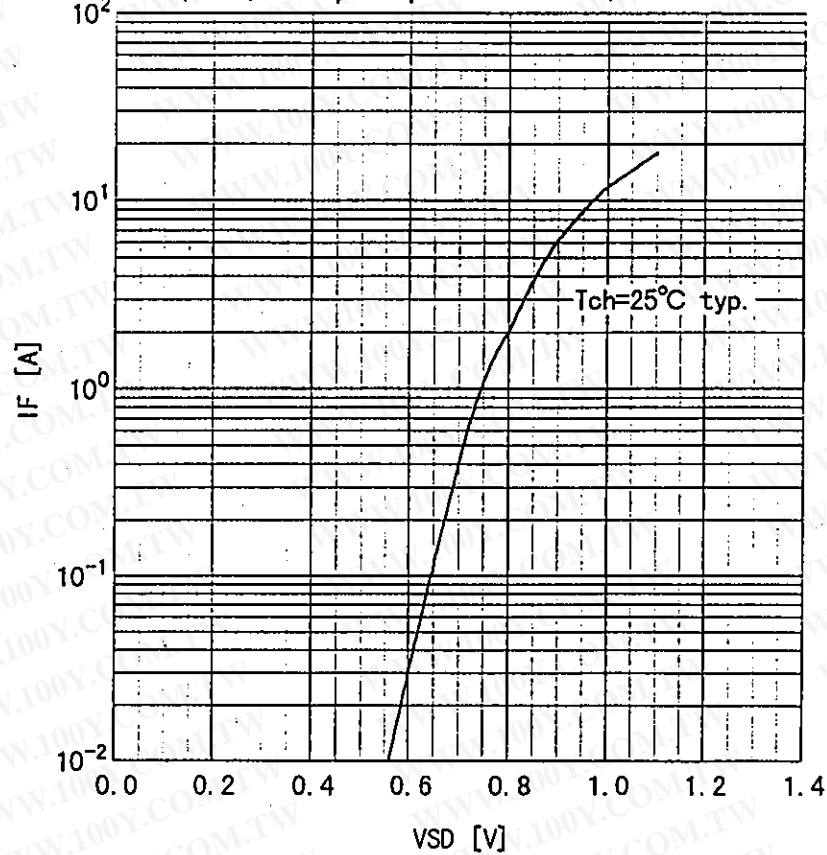


This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

Transient thermal impedance
 $Z_{thch-c} = f(t)$ parameter: $D = t/T$

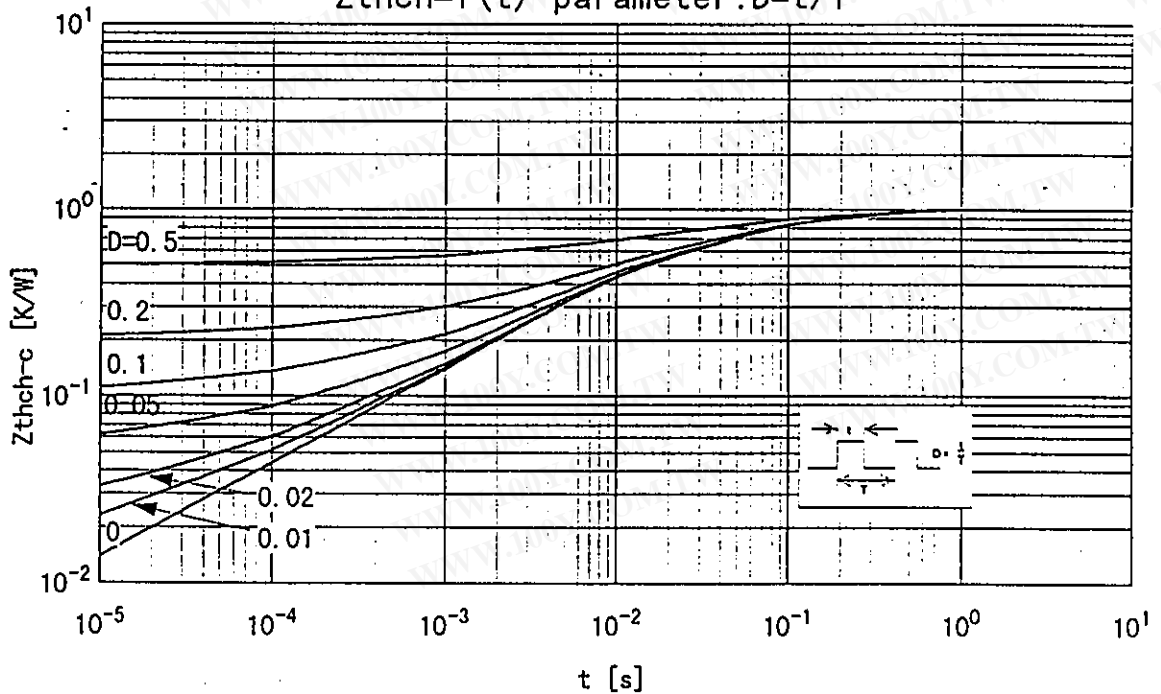

Avalanche energy derating
 $E_{as} = f(\text{starting } T_{ch}) : V_{CC} = 90V, I_{AV} = 6A$

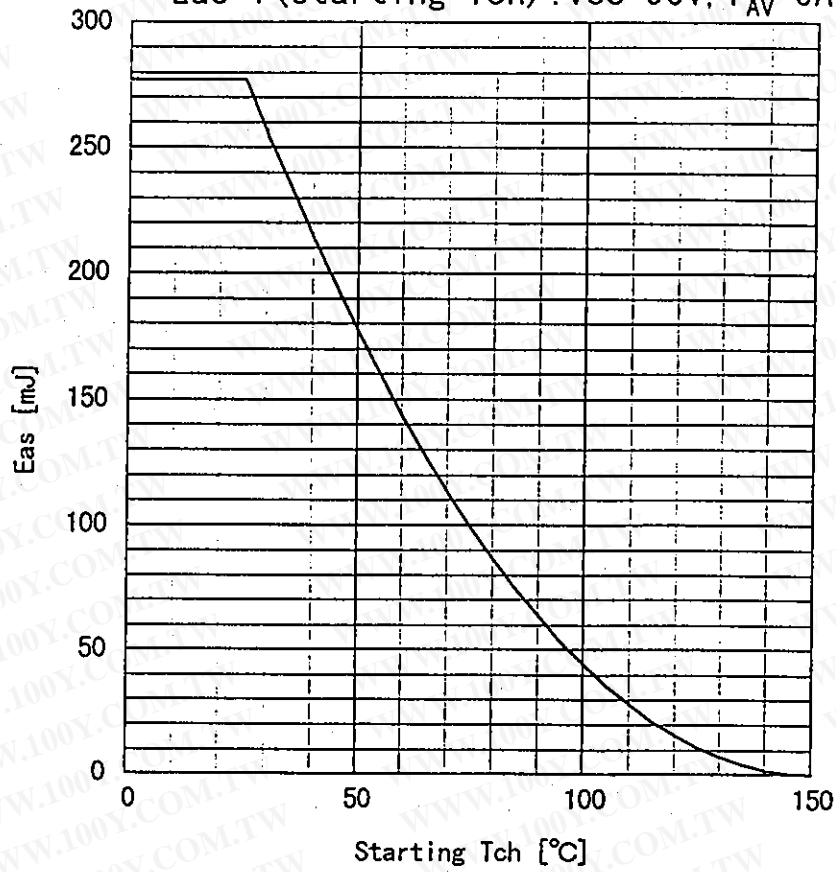

This material and the information herein is the property of
 Fuji Electric Co.,Ltd. They shall be neither reproduced, copied,
 lent, or disclosed in any way whatsoever for the use of any
 third party nor used for the manufacturing purposes without
 the express written consent of Fuji Electric Co.,Ltd.