

SOLID STATE RELAY

MAXIMUM LOAD CURRENT 1.5 A / 2.0 A

SE SERIES

RoHS compliant

FEATURES

- Conforms to UL, CSA standards
- Ultra slim and light weight, SIL terminals type
 - Size: 5.0 (W) × 20.0 (L) × 17.0 (H)mm
 - Weight: approximately 4.0 g
- High reliability, long life and maintenance free
- High isolation (between input and output)
 - Dielectric strength: 2,500 Vrms
- Internal zero cross circuit type available
- RoHS compliant since date code: 6522
Please see page 5 for more information



ORDERING INFORMATION

[Example] $\frac{SE}{(a)} - \frac{12}{(b)} \frac{A}{(c)} \frac{02}{(d)} \frac{V}{(e)} \frac{F}{(f)}$

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

(a)	Series Name	SE : SE Series
(b)	Nominal Voltage (Input side)	3: 3 VDC 5: 5 VDC 12: 12 VDC 24: 24 VDC
(c)	Load Voltage	A : AC type
(d)	Load Current	015 : 1.5 A 02 : 2.0 A
(e)	Output Protection	Nil: No varistor V : Varistor type (2.0A type only)
(f)	Zero Cross Circuit	F: No zero cross type C: Zero cross type

SE SERIES

■ SPECIFICATIONS

Item		AC 1.5 A		AC 2.0 A		Remarks
		no zero cross	zero cross	no zero cross	zero cross	
INPUT side	Nominal Voltage (DC)	3 V, 5 V, 12 V, 24 V				
	Operate Range	±20% of nominal voltage				
	Must Operate Voltage	80% of nominal voltage				
	Must Release Voltage	Minimum 1 VDC				
	Input Impedance	3 VDC Type	130Ω	180Ω	130Ω	180Ω
5 VDC Type		330Ω	470Ω	330Ω	470Ω	±10%
12 VDC Type		1.0 kΩ	1.5 kΩ	1.0 kΩ	1.5 kΩ	±10%
24 VDC Type		2.2 kΩ	3.0 kΩ	2.2 kΩ	3.0 kΩ	±10%
OUTPUT side	Load Voltage Range	AC 24 to 265V rms				
	Maximum Load Current	1.5 Arms		2.0 Arms		see CHARACTERISTIC DATA
	Minimum Load Current	10 mArms				
	1 Cycle Surge Current	50 A (60 Hz 1 cycle)				
	Max. Off-State Leakage Current	0.5 mA rms		1.0 mA rms		(at 100 V rms 60 Hz)
		1.0 mA rms		2.0 mA rms		(at 200 V rms 60 Hz)
Max. On-State Voltage Drop	1.2 V rms		1.3 V rms		at maximum load current	
Maximum Operate Time	1 ms	1/2 cycle + max.1 ms	1 ms	1/2 cycle + max.1 ms		
Maximum Release Time	1/2 cycle +1ms max.					
Insulation Resistance	Minimum 1,000 MΩ (at 500 VDC)				for input-output	
Dielectric Strength	2,500 Vrms 1 minute				for input-output	
Operating Temperature Range	-30°C to + 85°C					
Storage Temperature Range	-40°C to +100°C					
Case Color	Black					
Weight	Approximately 3.5 g		5.1 g			

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

BLOCK DIAGRAM



LOAD		INSULATION CIRCUITS	Input/Output waveform (resistive load)
AC	Photo-triac coupler		<p>Source voltage of load</p> <p>Input signal</p> <p>Load current</p>

*: only 2A type had varistor







CHARACTERISTIC DATA

SE-()A015 type (1.5 A type)

SE-()A02 type (2.0A type)

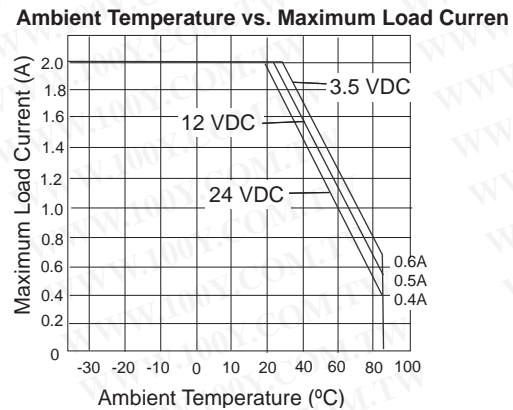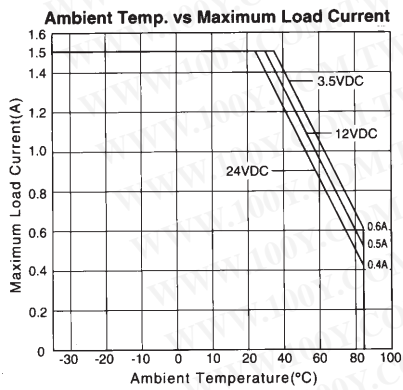


REFERENCE DATA

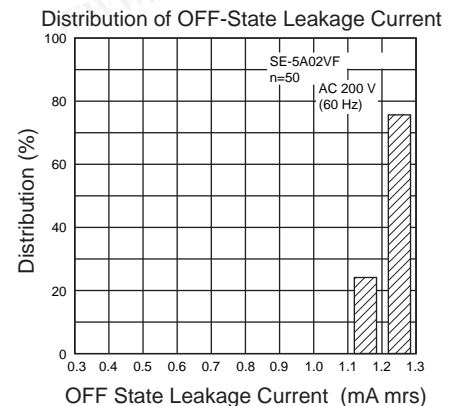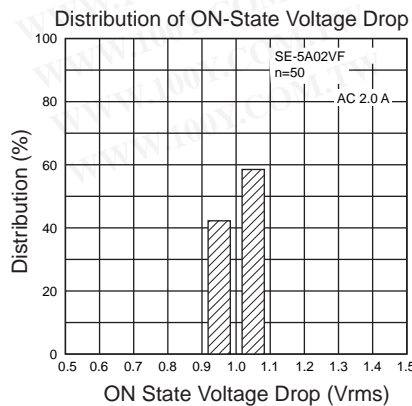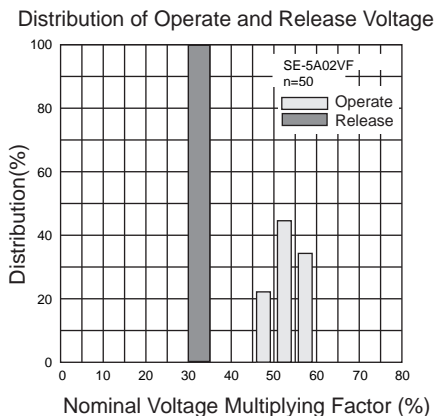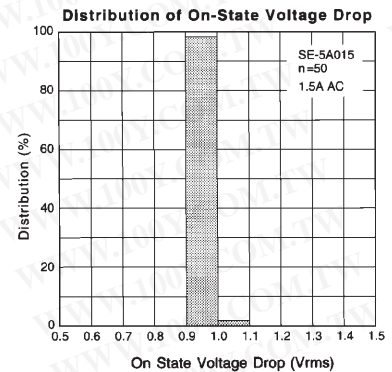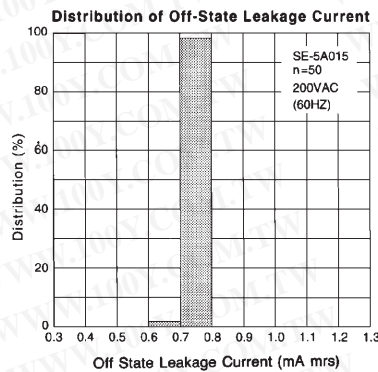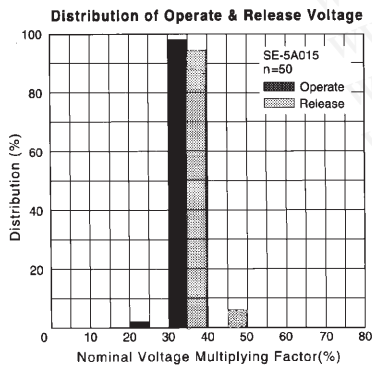

■ DIMENSIONS


● Dimensions

SE- () A015 type

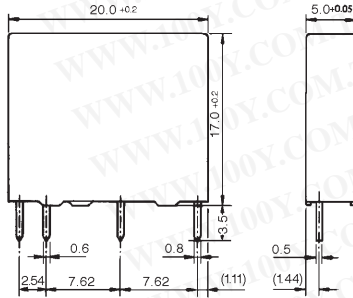


● Schematics

(BOTTOM VIEW)






● PC board mounting hole layout

(BOTTOM VIEW)




Unit: mm

SE- () A02 type

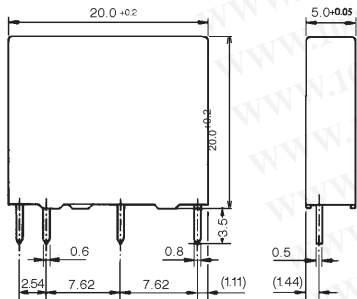

■ NOTES

When large noise and surge are impressed on the load side, there is the possibility of the occurrence of malfunction or damage. In such a case, a varistor should be inserted in the circuit.

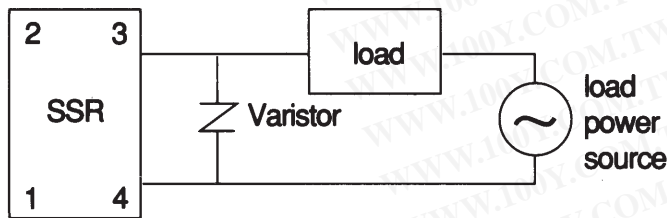

RoHS Compliance and Lead Free Relay Information

1. General Information

- Relays produced after the specific date code that is indicated on each data sheet are lead-free now. Most of our signal and power relays are lead-free. Please refer to Lead-Free Status Info. (<http://www.fujitsu.com/us/downloads/MICRO/fcai/relays/lead-free-letter.pdf>)
- Lead free solder paste currently used in relays is Sn-3.0Ag-0.5Cu.
- All signal and most power relays also comply with RoHS. Please refer to individual data sheets. Relays that are RoHS compliant do not contain the 5 hazardous materials that are restricted by RoHS directive (lead, mercury, chromium IV, PBB, PBDE).
- It has been verified that using lead-free relays in leaded assembly process will not cause any problems (compatible).
- "LF" is marked on each outer and inner carton. (No marking on individual relays).
- To avoid leaded relays (for lead-free sample, etc.) please consult with area sales office.
- We will ship leaded relays as long as the leaded relay inventory exists.

Note: Cadmium was exempted from RoHS on October 21, 2005. (Amendment to Directive 2002/95/EC)

2. Recommended Lead Free Solder Profile

- Recommended solder paste Sn-3.0Ag-0.5Cu.

Reflow Solder condition

Flow Solder condition:

Pre-heating: maximum 120°C
Soldering: dip within 5 sec. at
260°C solder bath

Solder by Soldering Iron:

Soldering Iron
Temperature: maximum 360°C
Duration: maximum 3 sec.

We highly recommend that you confirm your actual solder conditions

3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays.

4. Tin Whisker

- Dipped SnAgCu solder is known as low risk tin whisker. No considerable length whisker was found by our in house test.