

2.54MM EJECTOR HEADER WITH LONG EJECTOR

MATERIAL

INSULATOR : 30% Glass fiber PBT

CONTACT PIN : Brass

SPECIFICATION

CURRENT RATE : 1 AMP

INSULATION RESISTANCE : 1000MΩ Min at 500V DC






CONTACT RESISTANCE : 10mΩ Max.

DIELECTRIC VOLTAGE : 500V AC for one minute

OPERATION TEMPERATURE : -55°C to +105°C

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

1. S: Straight
- R: Right Angle
2. No. of contacts(10,12,14,16,20,
24,26,30,34,40,50,60,64)
3. G: Gold flash
 T: Tin plated
4. C: Gray
 B: Black
5. 1: Long ejector

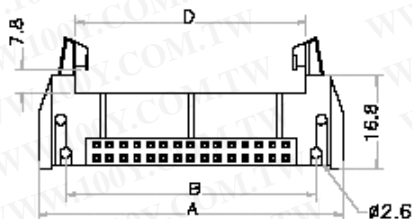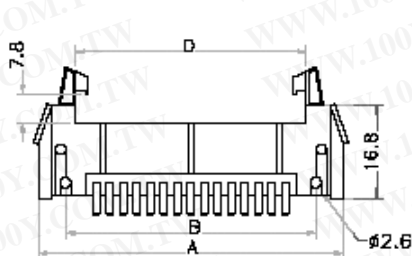

No. of pins	10	12	14	16	20	24	26	30	34	40	50	60	64
A	32.00	34.54	37.08	39.62	44.70	49.78	52.32	57.40	62.48	70.10	82.80	95.50	100.58
B	21.48	24.38	26.92	29.46	34.54	39.62	42.16	47.24	52.32	59.94	72.64	85.34	90.42
C	10.16	12.70	15.24	17.78	22.86	27.94	30.48	35.56	40.64	48.26	60.96	73.66	78.74
D	17.96	20.50	23.04	25.58	30.33	35.74	38.28	43.36	48.44	56.06	68.76	81.46	86.54