




- FOR HOUSING SENSITIVE ELECTRONIC ASSEMBLIES, PNEUMATIC, HYDRAULIC AND ELECTRICAL DEVICES IN COMMERCIAL AND INDUSTRIAL ENVIRONMENTS PROVIDING EFFECTIVE SHIELDING OF EMI & RFI.
- DESIGNED TO IP 65 OF IEC 529 AND NEMA 4 (DUST AND HOSEPROOF).
- WALL MOUNTING HOLES AND LID FIXING SCREWS ARE OUTSIDE THE SEALING AREA THUS PREVENTING THE INGRESS OF MOISTURE AND DUST.
- THE LID INCORPORATES A RECESSED NEOPRENE GASKET.
- BOSSES ON INTERNAL BASE FOR FIXING PCB'S HORIZONTALLY OR CONNECTION OF EARTH GROUNDING, TERMINALS, ETC.
- INTERNAL GUIDE SLOTS FOR MOUNTING PCB ASSEMBLIES VERTICALLY.
- SCREWS HOLES FOR LID MOUNTING ARE ROLL THREADED.
- CAPTIVE, RECESSED LID SCREWS.

**SPECIFICATIONS:**

- BOX AND LID: ALUMINIUM ALLOY ADC-10 TO JAPAN INDUSTRIAL STANDARD (JIS) IN NATURAL FINISH.

**FINISHES AVAILABLE:**

- PAINTED, BLACK.
- EPOXY COATED, BLACK.

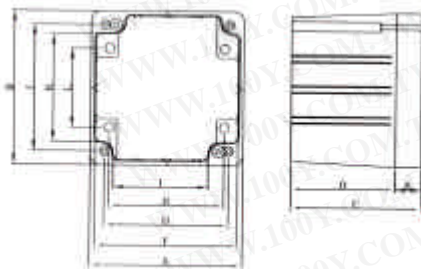

PART NO.	A	B	C	D	E	F	G	H	I	J	K	L
G137	120.5	120.5	101.5	81.3	20.2	113.7	84.1	57.1	86.2	84.1	87.4	57.1