



Pin-Indicating Type Non-Time-Delay 1/4" x 1 1/4" (6.3mm x 32mm)

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

GLD/GBA

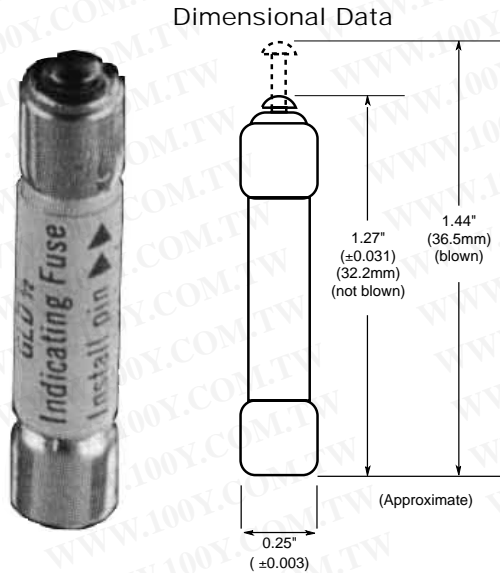

Time-Current Characteristic Curves—Average Melt

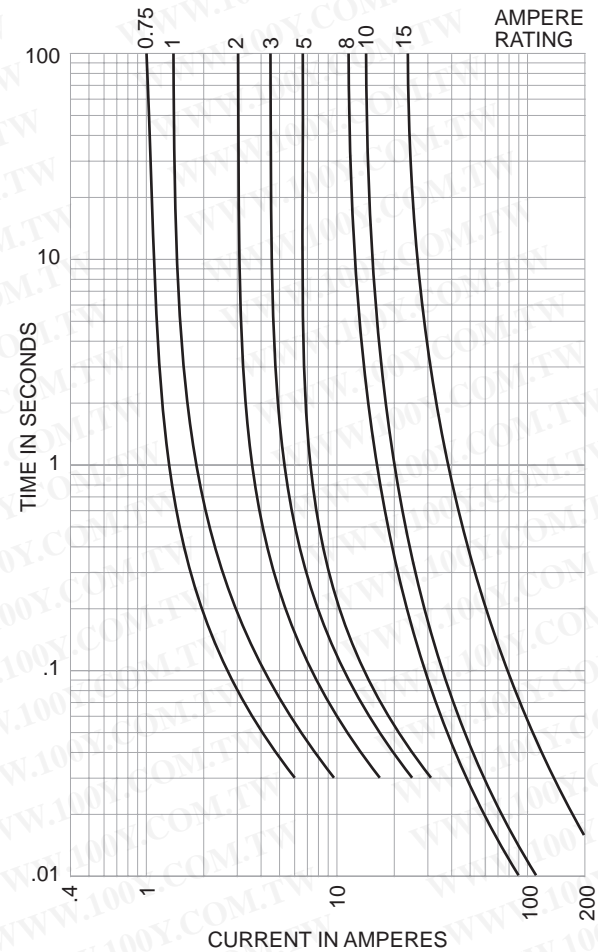

Catalog Symbol: GLD/GBA
 Non-Time-Delay; Indicating
 Ampere Rating: 1/2 to 15 Amperes
 Agency Approvals:

U.L. Listed, Std. 248-14

1/2-5A/125 Vac, 10,000 AIC
 Guide JDYX, File E19180

U.L. Recognized, 6A/125Vac, 1000 AIC

10-15A/50V ac/dc, 300 AIC
 Guide JDYX2, File E19180

CSA Certified, 1/2-5A/125 Vac, 10,000 AIC
 Class 1422-01, File 53787

Electrical Ratings (Catalog Symbol and Amperes)

GLD-1/2	GLD-2	GLD-6
GLD-3/4	GLD-3	GLD-10
GLD-1	GLD-4	GLD-12
GLD-1-1/2	GLD-5	GLD-15

Carton Quantity and Weight

Ampere Ratings	Carton Qty.	Weight	
		Lbs.	Kg.
1/2-15	100	0.86	0.390

CE logo denotes compliance with European Union Low Voltage Directive (50-1000 Vac, 75-1500 Vdc). Refer to BIF document #8002 or contact Bussmann Application Engineering at 314-527-1270 for more information.

General Information:

- Use in power electronic circuits in which a fuse opening must be quickly apparent.
- Opening of fuse results in the ejection of end pin.
- Type **GLD** has an albaloy-plated pin for positive, electrical signal circuit activation.
- Type **GBA** has a red pin for high visibility.
- The Buss Series 8000 fuseblocks are recommended for visual indication.
- For visual indication use Buss panel-mounted fuseholder HLD (15A maximum); for lamp indicating, HKA (15A maximum).
- Body material: Fibre tube.
- Ferrule plating: Nickel plated endcaps.
- Ferrule material: Brass

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.