

# HAKKO375



勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

Solder feeder with solder cutting function providing excellent cost efficiency, applicable to lead-free soldering



[Catalog Request](#)[Catalog Download](#)

## Features

### Lead-free compliant


**"Feeder with solder cutting function" offering a high cost performance**

- ❖ Minimizing the solder ball and flux splashing.
- ❖ Compact design
- ❖ Can be applicable with the conventional solder reel stand.

(Can be applicable with the HAKKO 611 ) [Click here for details.](#)

### ❖ The effect of using grooved solder

<The amount of flux splashes>

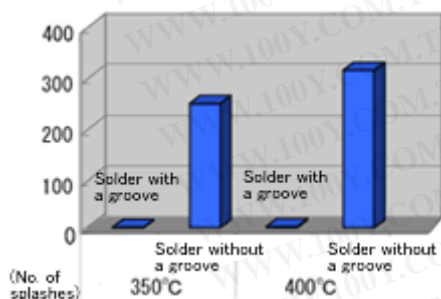


- Measurement details

Lead-free solder (Sn-3Ag-0.5Cu) of Ø1.0 x 500mm is fed to Hakko soldering iron and the number of the flux splashes is measured.

\* The effect of splash prevention may differ depending on the work condition.

<Cross section of solder>



\* The effect of splash prevention may differ depending on the work condition.

## Packing List

Models	Packing List
No. 375 For Solder Dia. 0.5mm	Feeder Unit, AC Adapter
No. 375 For Solder Dia. 0.6mm	
No. 375 For Solder Dia. 0.8mm	
No. 375 For Solder Dia. 1.0mm	

## Specifications

Feeder Unit	Rating	24V DC 75mA
	Motor Rating	24V DC 130mA (Rated)
	Solder Feed Speed	27mm/sec.
	Outer Dimensions	76(W) x 96(H) x 50(D)mm
	Weight	Approx. 590g
AC Adapter	Output	24V DC

## Option

勝 特 力 材 料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

	Name
B2763	Hand Switch
B1649	Foot Switch



No.B2763  
Hand Switch



No.1649  
Foot Switch

## Operation

### Application

The Application and combination example (with HAKKO 611 )

