

HD74HCU04A

Hex Inverters

HITACHI

ADE-205-288 (Z)

1st. Edition

June 1999

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Description

The HD74HCU04A has six inverters in a 14 pin package. $Y = \bar{A}$

Features

- $V_{CC} = 4.5$ to 5.5 V operation
- Input terminal has protection diode

Function Table

Input A

Output Y

H

L


L

H

H : High level

L : Low level

Pin Arrangement

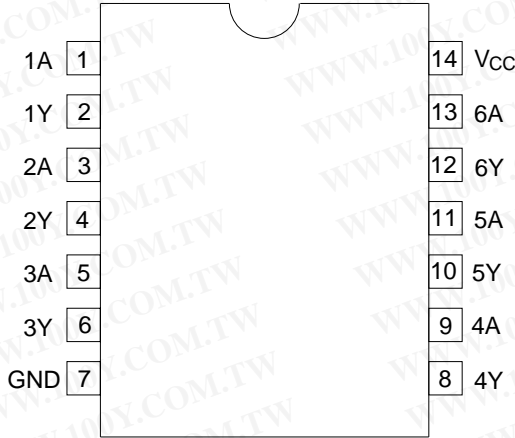

(Top view)

Absolute Maximum Ratings


Item	Symbol	Ratings	Unit
Supply voltage	V_{CC}	-0.5 to 7.0	V
Input diode peak current	I_{IK}	± 20	mA
Output diode peak current	I_{OK}	± 20	mA
Output current	I_O	± 25	mA
V_{CC} , GND current / pin	I_{CC} or I_{GND}	± 50	mA
Storage temperature	Tstg	-65 to 150	°C

Recommended Operating Conditions

Item	Symbol	V _{CC} (V)	Min	Typ	Max	Unit
Supply voltage	V _{CC}		2.0	5.0	6.0	V
Input voltage	V _{IH}	2.0	1.7	—	—	V
		4.5	3.6	—	—	
		6.0	4.8	—	—	
	V _{IL}	2.0	0	—	0.3	
		4.5	0	—	0.8	
		6.0	0	—	1.1	
	V _I		0	—	V _{CC}	
Output voltage	V _O		0	—	V _{CC}	V
Output current	I _{OH}	4.5	—	-4.0	—	mA
		6.0	—	-5.2	—	
	I _{OL}	4.5	—	4.0	—	
		6.0	—	5.2	—	
Input rise / fall time	t _r , t _f	2.0	0	—	1000	ns
		4.5	0	—	500	
		6.0	0	—	400	
Operating temperature	T _a		-40	—	85	°C

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Logic Diagram (1/4 Circuit)

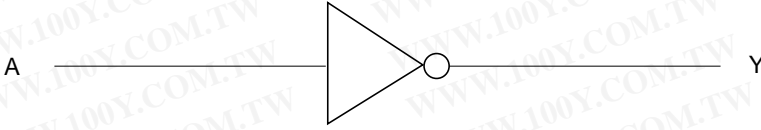

Electrical Characteristics


Item	Symbol	V_{CC} (V)	$T_a = 25^\circ\text{C}$			$T_a = -40 \text{ to } 85^\circ\text{C}$		Unit	Test Conditions
			Min	Typ	Max	Min	Max		
Output voltage	V_{OH}	2.0	1.80	—	—	1.80	—	V	$I_o = -20 \mu\text{A}$
		4.5	4.00	—	—	4.00	—		
		6.0	5.50	—	—	5.50	—		
		4.5	3.86	—	—	3.76	—		
		6.0	5.36	—	—	5.26	—		
	V_{OL}	2.0	—	—	0.20	—	0.20	V	$I_o = 20 \mu\text{A}$
		4.5	—	—	0.50	—	0.50		
		6.0	—	—	0.50	—	0.50		
		4.5	—	—	0.32	—	0.37		
		6.0	—	—	0.32	—	0.37		
Input current	I_i	6.0	—	± 0.1	± 100	—	± 1000	nA	$V_i = V_{CC}$ or GND
Quiescent supply voltage	I_{CC}	6.0	—	—	2.0	—	20	μA	$V_i = V_{CC}$ or GND, $I_o = 0$

Switching Characteristics ($C_L = 50$ pF)

Item	Symbol	V_{CC} (V)	$T_a = 25^\circ\text{C}$			$T_a = -40$ to 85°C		Unit	Input	Output
			Min	Typ	Max	Min	Max			
Propagation delay time	t_{PLH}	2.0	—	16	60	—	75	ns	A	Y
	t_{PHL}	4.5	—	7	12	—	15			
		6.0	—	6	10	—	13			
Output rise / fall time	t_r	2.0	—	21	75	—	95	ns		Each
	t_f	4.5	—	8	15	—	19			output
		6.0	—	7	13	—	16			
Input capacitance	C_i	—	—	3	10	—	10	pF		
Power dissipation capacitance	C_{PD}	—	—	20	—	—	—	pF		


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Test Circuit

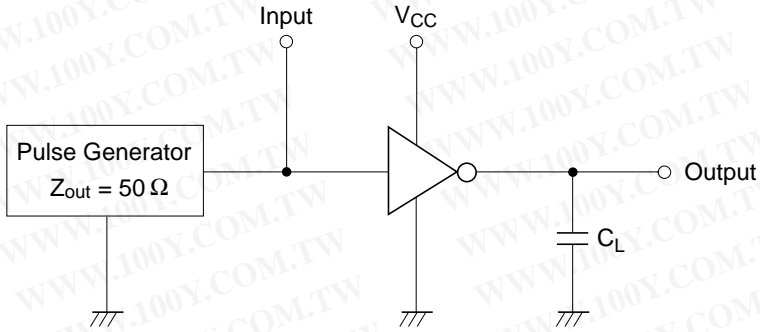

Note: 1. C_L includes probe and jig capacitance.

• Waveform

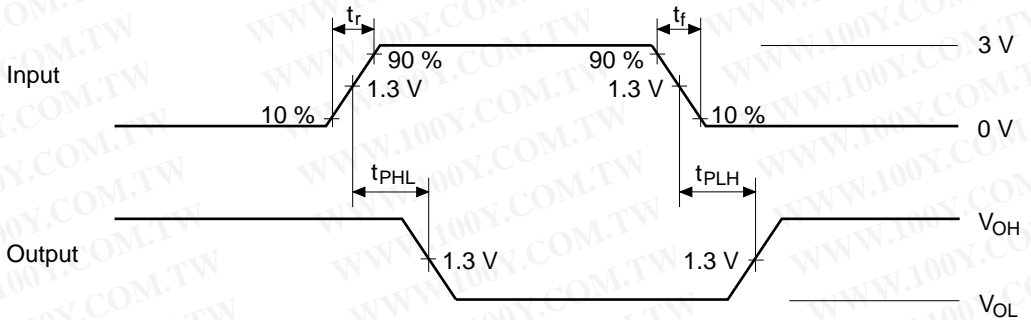


Note: 1. Input waveform : PRR = 1 MHz, duty cycle 50%, $t_r = 6$ ns, $t_f = 6$ ns

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


Package Dimensions

Unit : mm

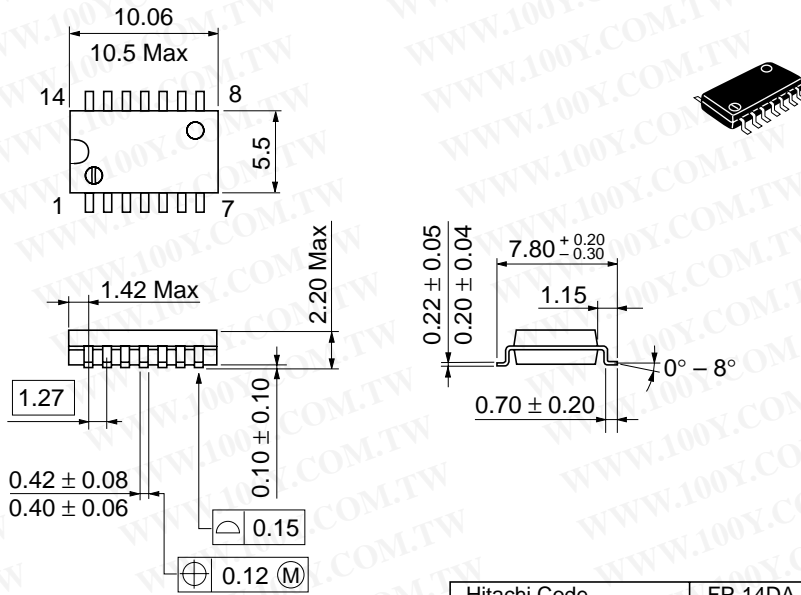

Dimension including the plating thickness
 Base material dimension

Hitachi Code	FP-14DA
JEDEC	—
EIAJ	Conforms
Weight (reference value)	0.23 g

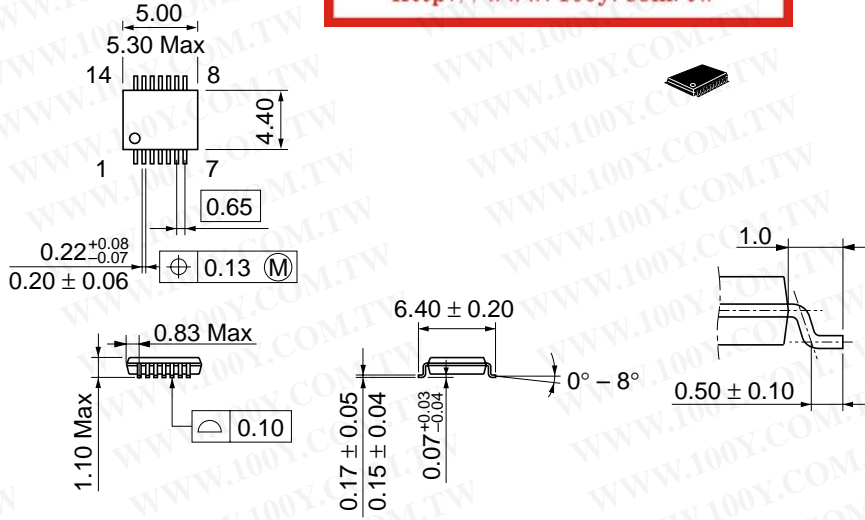

Dimension including the plating thickness
 Base material dimension

Hitachi Code	TTP-14D
JEDEC	—
EIAJ	—
Weight (reference value)	0.05 g

Cautions

1. Hitachi neither warrants nor grants licenses of any rights of Hitachi's or any third party's patent, copyright, trademark, or other intellectual property rights for information contained in this document. Hitachi bears no responsibility for problems that may arise with third party's rights, including intellectual property rights, in connection with use of the information contained in this document.
2. Products and product specifications may be subject to change without notice. Confirm that you have received the latest product standards or specifications before final design, purchase or use.
3. Hitachi makes every attempt to ensure that its products are of high quality and reliability. However, contact Hitachi's sales office before using the product in an application that demands especially high quality and reliability or where its failure or malfunction may directly threaten human life or cause risk of bodily injury, such as aerospace, aeronautics, nuclear power, combustion control, transportation, traffic, safety equipment or medical equipment for life support.
4. Design your application so that the product is used within the ranges guaranteed by Hitachi particularly for maximum rating, operating supply voltage range, heat radiation characteristics, installation conditions and other characteristics. Hitachi bears no responsibility for failure or damage when used beyond the guaranteed ranges. Even within the guaranteed ranges, consider normally foreseeable failure rates or failure modes in semiconductor devices and employ systemic measures such as fail-safes, so that the equipment incorporating Hitachi product does not cause bodily injury, fire or other consequential damage due to operation of the Hitachi product.
5. This product is not designed to be radiation resistant.
6. No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without written approval from Hitachi.
7. Contact Hitachi's sales office for any questions regarding this document or Hitachi semiconductor products.

HITACHI