

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

MDDSA Series (Small Type Metallized Polyester Capacitors)


MDDSA series is the reduced size of conventional MDD type, light weight and high reliability metallized polyester film capacitors.

- The size is reduced by 40 to 50% of conventional MDD type.
- The capacitance range is extended from 0.01 μ F to 10 μ F.
- Humidity resistance is greatly improved through special production technique.
- Excellent in flame retardant property with outside coating of flame resistance epoxy resin.
- Tracking resistance is improved.
- For lead forming and taping, see page 107 and 108.

Product Specifications

Items	Specifications
Temperature range	-40°C ~ +85°C (+105°C, with derating over 85°C)
Rated voltage	100 ~ 630 V.DC
Capacitance tolerance	$\pm 5\%$ (J), $\pm 10\%$ (K), $\pm 20\%$ (M)
Dielectric dissipation factor	0.8% or less (20°C, 1KHz)
Withstanding voltage	Between terminals Rated voltage (V.DC) · 1.4 for one min
	Between terminal and outside coating Rated voltage (V.DC) · 2.0 for 1 to 5 seconds
Insulation resistance	C_R 0.33 μ F 7,500M ω or more
	C_R > 0.33 μ F 2,500M ω · μ F or more
Related standard	Subject to JIS C 5101-1 and JIS C 5101-2.

Outline of drawings and dimensions

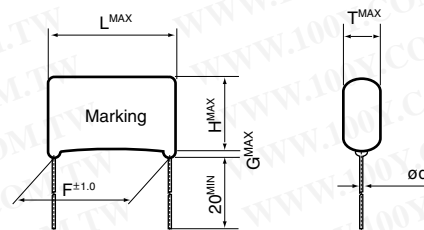

G : 1.0 mm when F Dimension is less than 7.5 mm.
 1.5 mm when F Dimension is more than 10 mm.

Standard value and case size

(Unit : mm)

Capacitance		Rated voltage (Code)																			
		100V.DC (2A)					250V.DC (2E)					400V.DC (2G)					630V.DC (2J)				
μ F	Code	T	H	L	F	d	T	H	L	F	d	T	H	L	F	d	T	H	L	F	d
0.010	103	4.5	7.5	8.5	5.0	0.5	4.5	8.0	10.0	7.5	0.6	4.5	8.0	10.0	7.5	0.6	4.5	8.0	12.5	10.0	0.6
0.012	123	4.5	7.5	8.5	5.0	0.5	4.5	8.5	10.0	7.5	0.6	4.5	8.5	10.0	7.5	0.6	4.5	8.5	12.5	10.0	0.6
0.015	153	4.5	7.5	8.5	5.0	0.5	4.5	8.0	10.0	7.5	0.6	4.5	8.0	10.0	7.5	0.6	5.0	9.0	12.5	10.0	0.6
0.018	183	4.5	7.5	8.5	5.0	0.5	4.5	8.0	10.0	7.5	0.6	4.5	8.0	10.0	7.5	0.6	5.0	9.5	12.5	10.0	0.6
0.022	223	4.5	7.5	8.5	5.0	0.5	4.5	8.0	10.0	7.5	0.6	4.5	8.0	10.0	7.5	0.6	5.5	10.0	12.5	10.0	0.6
0.027	273	4.5	7.5	8.5	5.0	0.5	4.5	8.0	10.0	7.5	0.6	5.0	8.5	10.0	7.5	0.6	5.5	11.0	12.5	10.0	0.6
0.033	333	4.5	7.5	8.5	5.0	0.5	4.5	8.0	10.0	7.5	0.6	5.0	9.0	10.0	7.5	0.6	6.0	11.5	12.5	10.0	0.6
0.039	393	4.5	7.5	8.5	5.0	0.5	4.5	8.0	10.0	7.5	0.6	4.5	8.0	12.5	10.0	0.6	6.5	12.0	12.5	10.0	0.6
0.047	473	4.5	8.0	8.5	5.0	0.5	4.5	8.0	10.0	7.5	0.6	4.5	9.0	12.5	10.0	0.6	7.5	12.5	12.5	10.0	0.6
0.056	563	4.5	8.0	8.5	5.0	0.5	4.5	8.0	10.0	7.5	0.6	5.0	9.0	12.5	10.0	0.6	5.5	11.0	18.0	15.0	0.6
0.068	683	4.5	8.0	8.5	5.0	0.5	4.5	8.5	10.0	7.5	0.6	5.5	9.5	12.5	10.0	0.6	6.0	11.5	18.0	15.0	0.6
0.082	823	4.5	8.0	8.5	5.0	0.5	4.5	9.0	10.0	7.5	0.6	5.5	10.5	12.5	10.0	0.6	6.0	13.0	18.0	15.0	0.6
0.10	104	4.5	8.0	8.5	5.0	0.5	5.0	9.0	10.0	7.5	0.6	6.0	11.0	12.5	10.0	0.6	6.5	13.5	18.0	15.0	0.6
0.12	124	4.5	8.0	10.0	7.5	0.6	5.5	9.5	10.0	7.5	0.6	5.0	10.0	18.0	15.0	0.6	7.5	14.0	18.0	15.0	0.8
0.15	154	4.5	8.5	10.0	7.5	0.6	6.0	10.0	10.0	7.5	0.6	5.0	10.5	18.0	15.0	0.6	8.0	15.0	18.0	15.0	0.8
0.18	184	4.5	8.5	10.0	7.5	0.6	5.0	10.0	12.5	10.0	0.6	5.5	11.0	18.0	15.0	0.6	9.0	15.5	18.0	15.0	0.8
0.22	224	5.0	8.5	10.0	7.5	0.6	5.5	10.5	12.5	10.0	0.6	6.0	12.0	18.0	15.0	0.6	9.5	16.5	18.0	15.0	0.8
0.27	274	5.0	9.0	10.0	7.5	0.6	6.0	11.0	12.5	10.0	0.6	6.5	12.5	18.0	15.0	0.8	7.5	17.5	25.5	22.5	0.8
0.33	334	5.5	9.5	10.0	7.5	0.6	6.5	11.5	12.5	10.0	0.6	7.0	12.5	18.0	15.0	0.8	8.0	18.5	25.5	22.5	0.8
0.39	394	6.0	9.5	10.0	7.5	0.6	5.0	12.0	18.0	15.0	0.6	7.0	14.0	18.0	15.0	0.8	9.0	19.0	25.5	22.5	0.8
0.47	474	6.5	10.0	10.0	7.5	0.6	5.5	12.0	18.0	15.0	0.6	8.0	14.5	18.0	15.0	0.8	10.0	20.0	25.5	22.5	0.8
0.56	564	5.5	10.5	12.5	10.0	0.6	6.0	12.5	18.0	15.0	0.6	7.0	14.0	25.5	22.5	0.8	11.0	21.0	25.5	22.5	0.8
0.68	684	5.5	11.0	12.5	10.0	0.6	6.5	13.0	18.0	15.0	0.8	7.5	14.5	25.5	22.5	0.8	12.0	22.5	25.5	22.5	0.8
0.82	824	6.0	11.5	12.5	10.0	0.6	7.0	14.0	18.0	15.0	0.8	7.5	16.0	25.5	22.5	0.8	12.0	22.5	30.5	27.5	0.8
1.0	105	6.5	12.0	12.5	10.0	0.6	7.5	14.5	18.0	15.0	0.8	8.5	17.0	25.5	22.5	0.8	13.5	24.0	30.5	27.5	0.8
1.2	125	5.5	12.0	18.0	15.0	0.8	8.5	15.0	18.0	15.0	0.8	9.5	18.0	25.5	22.5	0.8	15.0	25.0	30.5	27.5	0.8
1.5	155	6.0	12.5	18.0	15.0	0.8	9.0	16.0	18.0	15.0	0.8	9.0	18.0	30.5	27.5	0.8	16.5	27.0	30.5	27.5	0.8
1.8	185	6.5	13.0	18.0	15.0	0.8	8.0	15.0	25.5	22.5	0.8	10.0	19.0	30.5	27.5	0.8	18.5	29.0	30.5	27.5	0.8
2.2	225	7.0	14.0	18.0	15.0	0.8	9.0	16.0	25.5	22.5	0.8	11.0	20.0	30.5	27.5	0.8	21.5	31.5	30.5	27.5	0.8
2.7	275	8.0	14.5	18.0	15.0	0.8	10.0	17.0	25.5	22.5	0.8										
3.3	335	8.5	16.0	18.0	15.0	0.8	11.0	18.0	25.5	22.5	0.8										
3.9	395	7.5	14.5	25.5	22.5	0.8	11.5	20.0	25.5	22.5	0.8										
4.7	475	7.5	16.5	25.5	22.5	0.8	12.5	21.0	25.5	22.5	0.8										
5.6	565	8.5	17.0	25.5	22.5	0.8	12.0	21.0	30.5	27.5	0.8										
6.8	685	9.5	18.5	25.5	22.5	0.8	14.0	22.0	30.5	27.5	0.8										
8.2	825	11.0	20.0	25.5	22.5	0.8	15.0	23.0	30.5	27.5	0.8										
10.0	106	11.5	21.0	25.5	22.5	0.8	16.5	25.0	30.5	27.5	0.8										

Product symbol : (Example) MDDSA Series 100V.DC 0.47 μ F $\pm 10\%$

MDDSA 2A 474 K

— Type of series
 — Rated voltage code
 — Capacitance code
 — Capacitance tolerance code

For taping, ask us for further information.