


MTBS, MTB Series (Tape Wrapped Metallized Polyester Film Capacitors)

This series offers metallized film capacitors that have axial leads and exhibit excellent heat resistance and moisture resistance. These capacitors employ a metallized polyester film dielectric and have a polyester-taped outer covering and resin-sealed ends.

Outline of drawings and dimensions

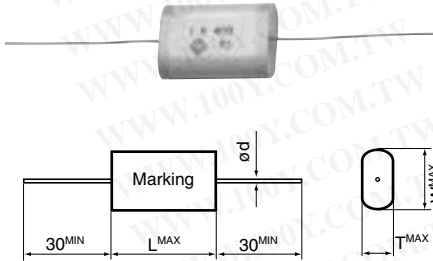

Product symbol : (Example) MTB Series 630V.DC 0.1 μ F \pm 10%

MTB 2J 104 K

Type of series: MTB
 Capacitance code: 104
 Capacitance tolerance code: J
 Rated voltage code: K

Product symbol : (Example) MTBS Series 100V.DC 1.0 μ F \pm 10%

MTBS 2A 105 K

Type of series: MTBS
 Specify as MTBS when ordering 100V DC items

Product Specifications

Items	Specifications
Temperature range	-40°C ~ +85°C
Rated voltage	100 ~ 630 V.DC
Capacitance tolerance	\pm 5% (J), \pm 10% (K), \pm 20% (M)
Withstanding voltage	Rated voltage (V.DC) \cdot 1.4 for one min.
Dielectric dissipation factor	0.8% or less (20°C, 1KHz)
Insulation resistance (Between terminals)	C_R 0.33 μ F 7,500M ω or more C_R > 0.33 μ F 2,500M ω \cdot μ F or more
Related standard	Subject to JIS C 5101-1 and JIS C 5101-2.

Standard value and case size


(Unit : mm)

Capacitance	MTBS				MTB												
	μ F	Code	Rated voltage (Code)														
			100V.DC (2A)				250V.DC (2E)				400V.DC (2G)				630V.DC(2J)		
T	W	L	d	T	W	L	d	T	W	L	d	T	W	L	d		
0.022	223									4.0	7.0	14.0	0.6	4.5	9.0	16.0	0.6
0.033	333									4.0	7.5	16.0	0.6	5.5	9.0	16.0	0.6
0.047	473							4.0	7.5	14.0	0.6			4.5	9.5	22.0	0.6
0.068	683							4.0	7.5	16.0	0.6			5.5	10.5	22.0	0.6
0.10	104							4.5	9.0	16.0	0.6			6.5	13.0	22.0	0.6
0.12	124							5.0	9.5	16.0	0.6			7.0	13.5	22.0	0.6
0.15	154							5.5	10.5	16.0	0.6			6.5	11.5	29.0	0.8
0.18	184							6.0	11.0	16.0	0.6			6.5	13.0	29.0	0.8
0.22	224							5.0	10.0	22.0	0.6			7.5	14.0	29.0	0.8
0.27	274	4.0	8.0	14.0	0.6	5.5	10.5	22.0	0.6	8.0	14.5	22.0	0.6	7.5	17.0	29.0	0.8
0.33	334	4.5	8.5	14.0	0.6	6.0	11.0	22.0	0.6	7.0	13.5	29.0	0.8	8.0	17.5	31.0	0.8
0.39	394	5.0	9.0	14.0	0.6	7.0	11.5	22.0	0.6	7.5	14.0	29.0	0.8	9.0	18.5	31.0	0.8
0.47	474	5.5	9.5	14.0	0.6	7.5	12.5	22.0	0.6	8.5	14.5	29.0	0.8	9.5	19.0	31.0	0.8
0.56	564	4.5	9.5	20.0	0.6	6.0	12.0	29.0	0.8	8.0	17.5	29.0	0.8	11.0	20.5	31.0	0.8
0.68	684	5.0	9.5	20.0	0.6	6.5	13.0	29.0	0.8	9.0	18.5	29.0	0.8	11.0	23.5	31.0	0.8
0.82	824	5.0	10.0	20.0	0.6	7.0	13.5	29.0	0.8	10.0	19.5	29.0	0.8	12.5	25.0	31.0	0.8
1.0	105	6.0	10.5	20.0	0.6	7.0	16.5	29.0	0.8	11.5	21.0	29.0	0.8	14.0	26.5	31.0	0.8
1.2	125	6.5	11.5	20.0	0.6	8.0	17.5	29.0	0.8	12.0	21.5	31.0	0.8	12.5	25.0	43.0	1.0
1.5	155	7.0	12.5	20.0	0.6	9.0	18.5	29.0	0.8	14.0	23.5	31.0	0.8	14.0	26.5	43.0	1.0
1.8	185	7.0	12.0	22.0	0.8	10.0	19.5	29.0	0.8	12.5	22.0	43.0	1.0	15.5	28.5	43.0	1.0
2.2	225	7.5	13.0	22.0	0.8	11.0	21.0	29.0	0.8	14.0	24.0	43.0	1.0	15.5	28.0	52.0	1.0
2.7	275	8.5	14.0	22.0	0.8	9.5	19.0	43.0	1.0	14.0	24.0	43.0	1.0				
3.3	335	9.0	16.0	22.0	0.8	10.5	20.5	43.0	1.0	16.0	28.5	43.0	1.0				
3.9	395	10.0	17.0	22.0	0.8	12.0	21.5	43.0	1.0	16.5	32.5	43.0	1.0				
4.7	475	11.0	17.5	22.0	0.8	13.5	23.0	43.0	1.0	15.5	31.0	52.0	1.0				
5.6	565	11.0	17.5	26.0	0.8	13.0	22.5	52.0	1.0								
6.8	685	12.0	18.5	26.0	0.8	14.5	24.0	52.0	1.0								
8.2	825	11.5	18.5	29.0	0.8	16.0	25.5	52.0	1.0								
10.0	106	12.5	20.5	29.0	0.8	16.5	29.5	52.0	1.0								

WMTB, WMTB-P Series (High-frequency Large-current Tape-wrapped Capacitors) (For Snubbers)

The WMTB / WMTB-P series offers tape-wrapped capacitors which are developed for applications where high-frequency current is essential. Being small and lightweight, these capacitors are ideal for use in high-frequency large-current circuits for high-frequency surge suppressors, various inverter circuits, snubber circuits, and the like.

Outline of drawings and dimensions

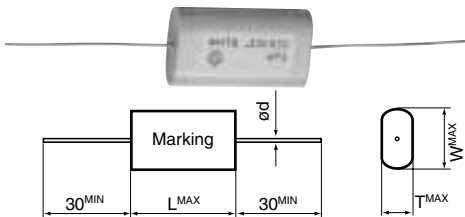

Product symbol : (Example) WMTB-P Series 1200V.DC 0.1 μ F \pm 10%

WMTB-P 1200 104 K

Type of series: WMTB-P
 Capacitance code: 104
 Capacitance tolerance code: K
 Rated voltage code: 1200

WMTB, and WMTB-P Type Product Specifications

Items	Specifications	
Type of Series	WMTB Type	WMTB-P Type
Dielectric	Metallized polyester	Metallized polypropylene
Temperature range	-40°C ~ +85°C	-40°C ~ +85°C
Rated voltage	630V.DC	1,200V.DC
Capacitance tolerance	\pm 10% (K)	\pm 10% (K)
Withstanding voltage	Rated voltage (V.DC) \cdot 1.5 for one min.	Rated voltage (V.DC) \cdot 1.5 for one min.
Dielectric dissipation factor	0.8% or less (20°C, 1KHz)	0.1% or less (20°C, 1KHz)
Insulation resistance (Between terminals)	C_R 0.33 μ F 9,000M ω or more C_R > 0.33 μ F 3,000M ω \cdot μ F or more	C_R 0.33 μ F 30,000M ω or more C_R > 0.33 μ F 10,000M ω \cdot μ F or more

WMTB, and WMTB-P Type Standard value and case size

(Unit : mm)

Capacitance	μ F	Code	Rated voltage									
			630V.DC (WMTB Type)				1200V.DC (WMTB-P Type)					
T	W	L	d	T	W	L	d	T	W	L	d	
0.10	104				11.0	20.0	36.0	0.8				
0.15	154				13.5	23.0	36.0	0.8				
0.22	224	10.5	20.0	29.0	0.8	17.0	26.0	36.0	0.8			
0.33	334	12.0	18.5	33.0	0.8	15.5	25.0	41.0	1.0			
0.47	474	13.0	22.5	33.0	0.8	20.0	29.0	41.0	1.0			
0.68	684	14.0	24.0	41.0	1.0	23.5	33.0	41.0	1.0			
1.0	105	16.5	27.5	41.0	1.0	21.0	35.5	54.0	1.0			
1.5	155	18.0	27.5	52.0	1.0							
2.2	225	21.0	33.5	52.0	1.0							