


HSIANG NENG DC GEARED MOTOR
HN-GH35GMA TYPE

DC MOTORS TEST LIST-WE ALSO COULD DESIGN VARIOUS SPEEDS,TORQUE PARAMETERS & DYNAMIC CHARACTERICS FOR YOU IF YOUR REQUIREMENTS ARE NOT ON THE FOLLOWING TEST LIST

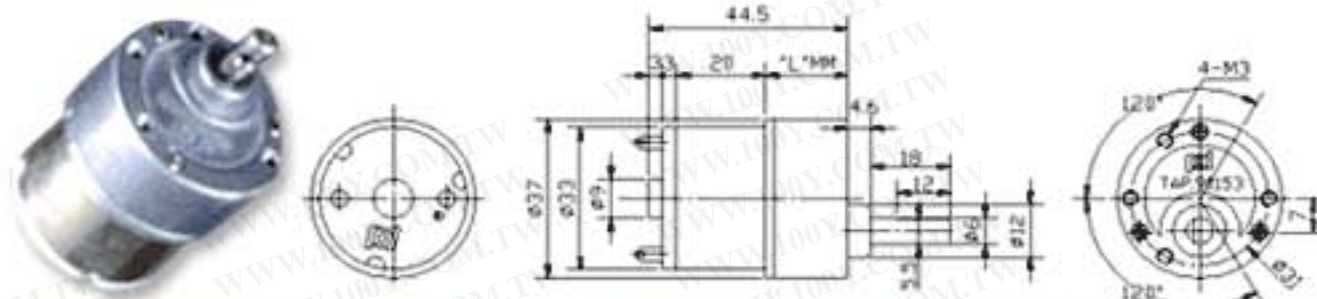

TYPE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R
RATIO	6	10	18	30	50	60	75	90	100	150	170	300	500	810	900	1000	1500	3000
DIM "L"MM	18	18	18	18	18	18	18	18	18	21	21	21	24	24	24	24	27	27
EFF %	81	81	73	73	66	66	66	66	66	59	59	59	59	53	53	53	48	48
ALLOWABLE TORQUE kg-cm	0.7	0.7	1.0	1.3	2.3	3	4	4	5	6	6	6	6	6	6	6	6	6

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL		
	OPERATING	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	EFF	TORQUE		
	RANGE	VDC	rpm	mA	rpm	mA	OZ-IN g-cm	W	%	OZ-IN	g-cm	
HN-35 GB-1632T	3-12	3	1500	35	950	135	0.26	19	0.19	46	0.63	45
HN-35 GB-1632T	4.5-12	6	3180	45	1980	280	0.68	49	1.0	61	1.39	100
HN-35 GB-1345T	4.5-12	6	2230	40	1210	185	0.53	38	0.48	45	0.97	70
HN-35 GB-1345T	4.5-12	12	4550	65	3090	230	0.78	56	1.8	67	2.08	150
HN-35 GB-1251T	4.5-12	12	4000	50	2640	195	0.78	56	1.54	66	2.22	160
HN-35 GB-1060Y	6-12	12	1780	40	885	75	0.36	26	0.24	29	0.97	70
HN-35 GB-1640Y	4.5-12	12	3030	45	2390	95	0.43	31	0.77	73	2.08	150
HN-35 GB-1632Y	6-12	12	3550	45	2560	160	0.65	47	1.25	68	2.22	160
HN-35 GB-1632T	4.5-12	12	6530	65	5160	280	0.67	48	2.54	77	2.5	180
HN-35 GB-1345Y	6-24	24	5100	40	4150	100	0.47	34	1.48	67	2.5	180
HN-35 GB-1060Y	6-24	24	3620	45	2420	95	0.69	50	1.24	57	1.53	110
HN-35 GB-1640Y	6-24	24	6000	50	4980	125	0.74	53	2.73	76	3.47	250

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)