

Rainbow cables

UL & CSA GRADE:

UL STYLE:2651

Rate temperature:105°C

Rate voltage:300V

Flame Test:vw-1

CSA STYLE:C22.2 NO.210.2

Rate temperature:105°C

Rate voltage:300V

Flame Test:FT1,FT2

PHYSICAL PROPERTIES:

after 7 days air oven at 136°C

Average tensile strength;1500 lbf/inch²

Percent of original:70% at least

Average elongation :200%

Percent of original:65% at least


勝特力材料 886-3-5753170

勝特力电子(上海) 86-21-54151736

勝特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

CONSTRUCTION DRAWING:

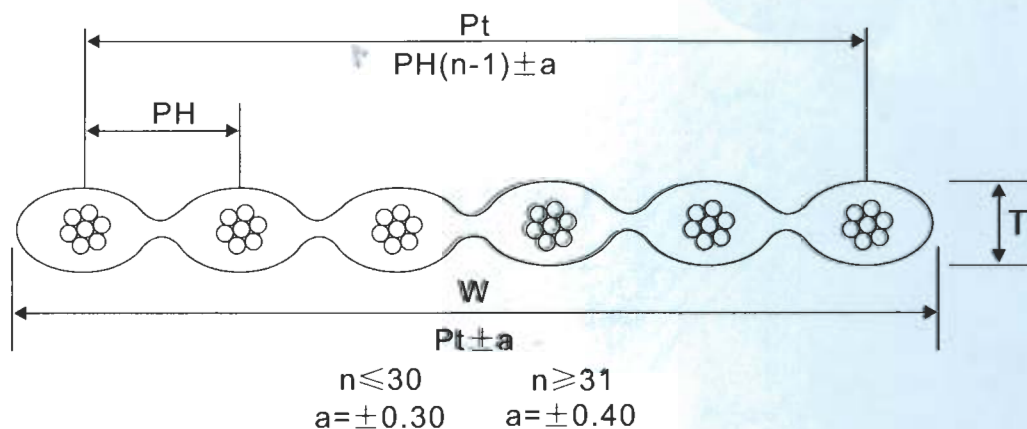

USAGE:

car, elevator, communication (switch machine), digital control facilities, apparatus and clock, inspection machine and so on