


HEATSINKS

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

ACCESSORIES
INFORMATION


HS01

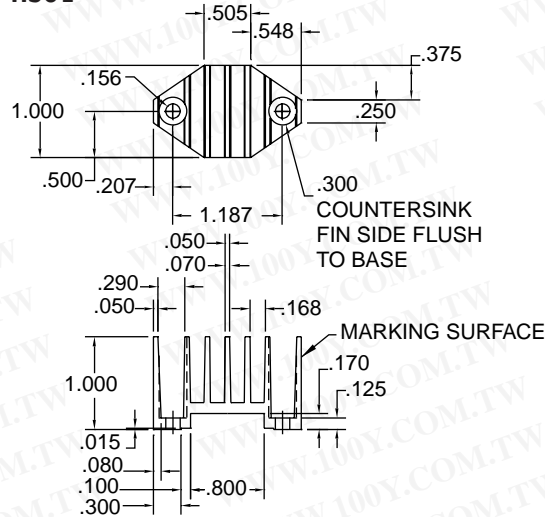

NOTES:

FINISH TO BE BLACK ANODIZE PER
 MIL-A-8625, TYPE II, CLASS 2.
 FOR REFERENCE, TYPICAL BREAKDOWN
 VOLTAGE >300V

TOLERANCES- UNLESS OTHERWISE SPECIFIED	.XX= ±.01 .XXX= ±.02 ANG.= ±.5°
---	---------------------------------------

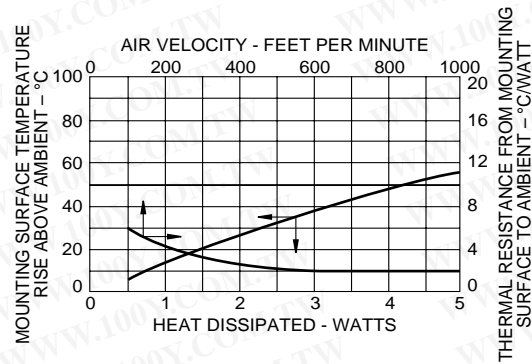

4


3

2


1

D

D

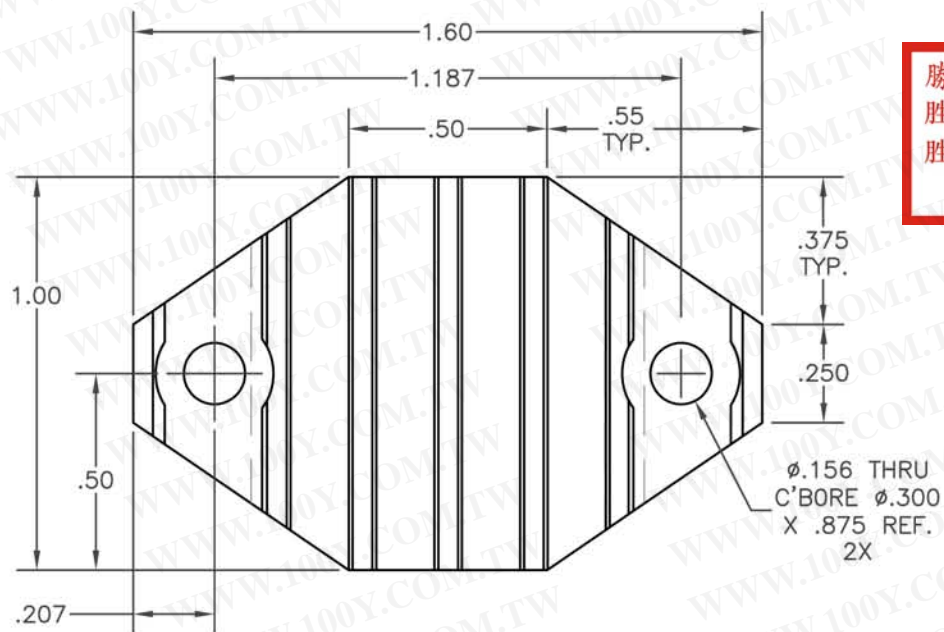


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

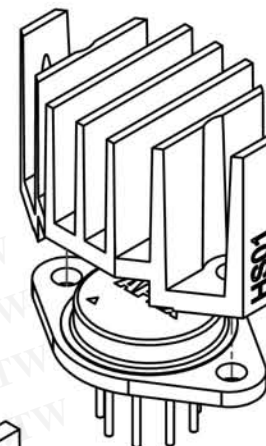


C

C

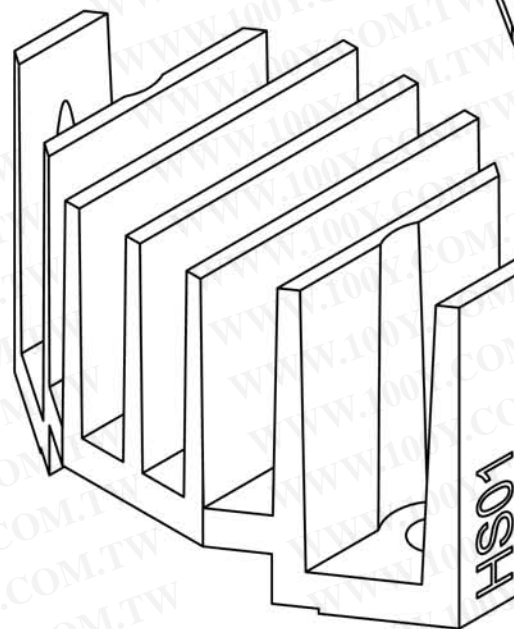

B

B

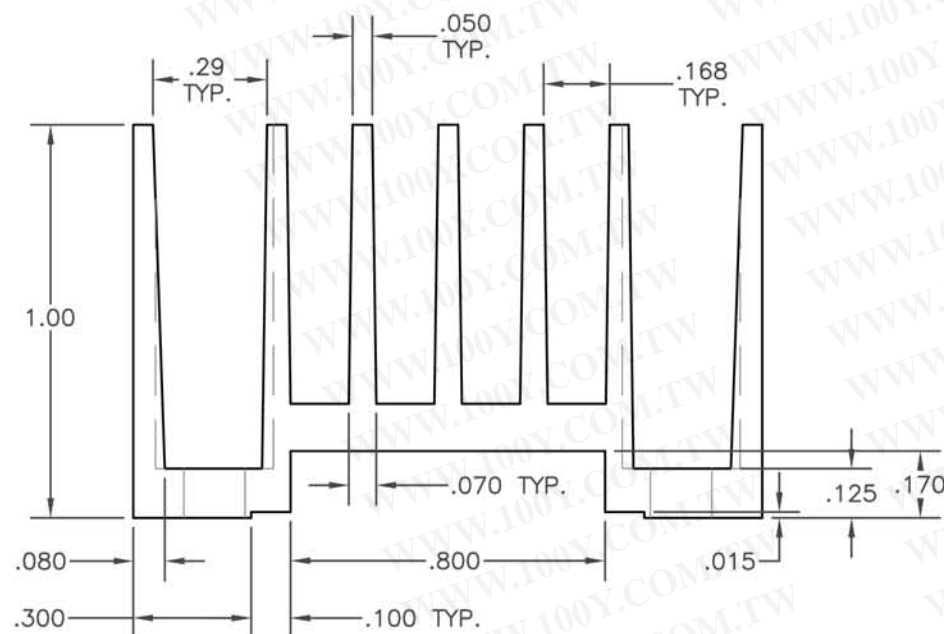

NOTES:

1. Unless otherwise noted, all dimensions are in inches.
2. Break all sharp edges, de-burr & remove loose chips.
3. Material: Aluminum (M/F AAVID Thermalloy NP971944)
4. Finish: Anodize per MIL-A-8625, Type II, Class 2, Black
Typical breakdown voltage > 300V
5. Mark with contrasting ink as shown, if specified by P.O.
6. Approximate Weight: 0.6 oz [17g]

A

A

TOLERANCES - UNLESS OTHERWISE SPECIFIED	
.XX	= $\pm .01$
.XXX	= $\pm .005$
ANG.	= $\pm .5^\circ$

TITLE		PART NO.	
HEATSINK, TO3		HS01	
SUBJECT MECHANICAL DRAWING			
ENG. D-M	TECH/DRAW. D-M	QTY. 46411	REV. 1
DATE 10/13/04	FILENAME HS01-G	REV. G	DATE 10/13/04

4

3

2

1