

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

FCC 軟排線

. UL 2896

. UL 20624

. TYPE A.B.C.D.F

. PITCH 0.5 0.8 1.0 1.25




Connecting-Flexible Flat Cable

- 總厚度 — 0.17mm — 一般級
0.13mm — 超軟級
0.12mm — 極軟級
- EMI 處理 網印銀漿 Silver ink coating
 - 包導電布 Conductive fabric wrapping
 - 包導電布金屬 Conductive metal foil wrapping
 - 包導電網 Metal mesh

ADVANTAGES

- SIMPLIFY WIRING PROCESS
- SPACE SAVING
- LABOR SAVING
- THIN AND FLEXIBLE

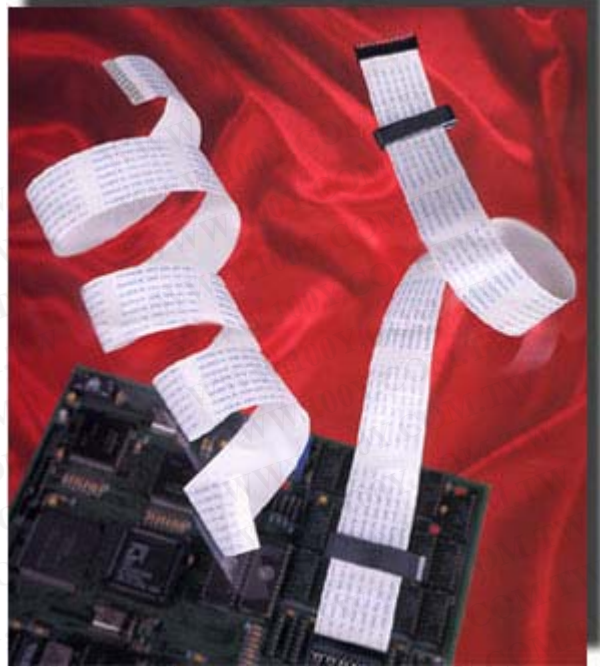

MERIT OF FPC

- Simplify wiring process
- Space saving
- Labor saving
- Thin and flexible

APPLICATION

- Super flex tape : DVD driver, CD rom driver, CDP, etc.
- General tape : audio, video, scanner, printer, cordless phone, fax m/c, note book P.C., car audio, home equipment, etc.
- Shield tape : EMI application
- Black color tape available

CUSTOM SERVICE

- Custom design—
 - No. of conductor & conductor dimension
 - Cable length
 - Cable pitch
 - Taping (Double side adhesive tape)
 - Folding / half stripping

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

● APPLICABLE UL NO.

UL NO.	VOLTAGE RATING	OPERATING TEMPERATURE	FILE NO.
UL 2896	30V	80°C	E 177886
UL 20624	60V	80°C	E 177886

● SELECTION GUIDE FOR CONDUCTORS

		PITCH			
		0.5	1.0	1.25	2.54
CONDUCTORS FOR TYPE B,C,D,F	Thickness	0.1 ~ 0.035	0.1 0.05	0.1	
	Width	0.3	0.65	0.8	1.27
CONDUCTOR FOR TYPE A	Thickness	- 0.1 (PBW)			
	Width	- 0.5 (PBW)			

TYPE	CONFIGURATION
A	
B	
C	
D	
F	