

扁平形电缆 (P=1.27mm)屏蔽, 带外层 Shielded, Jacketed	<h1>2651-V-SX</h1>
扁平形电缆 Flat cable	

- 额定 Rating 105°C, 300V
- 标准 Standard UL Subject 758
- 日立标准规格书 Hitachi Specification : SP23-90870

■ 特长


1. 对扁平形电缆 (UL2651) 施加了铝、聚酯屏蔽和PVC外层的电缆。
2. 耐噪性能好

◆ Features

1. AL / PET film shielded, PVC jacketed flat cable.
2. Excellent noise reduction characteristics.

■ 构造和性能

◆ Construction, Properties

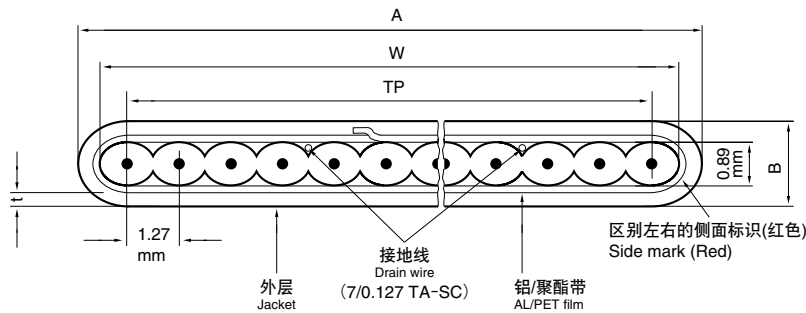

电缆芯数 No. of conductors	导体 Conductor			尺寸 Dimensions					最大导体电阻 Max. cond. resistance at 20°C (Ω/km)	概算质量 Approx. mass (kg/km)		
	AWG 型号 Size	构成 Stranding (No./mm)	材质 Material	TP (mm)	W (mm)	A (mm)	B (mm)	t (mm)				
10	28	7/0.127	TA	11.43	12.7	14.5	2.7	0.89	223	55		
20				24.13	25.4	27.2						
26				31.75	33.02	34.8						
30				36.83	38.1	39.9						
34				41.91	43.18	45.7	3.4	1.27			223	219
40				49.53	50.8	53.3						
50				62.23	63.5	66.0						
60				74.93	76.2	79.5						

备注

1. TA: 镀锡软铜线, TASC: 绞线整体镀锡导体
2. 电气特性
最小绝缘电阻 (20°C时): 100MΩ·km
耐电压: A.C.2000V/1min.
3. 产品形状: 30m/线盘

Note

1. TA : Stranded conductor, TASC : Hi-wrap wire
2. Electrical properties
Insulation resistance (at 20°C) : Min. 100MΩ·km
Dielectric withstanding voltage : A.C. 2000V/1min
3. Packing : 30m / coil

■ 品名略号 (例)

UL2651-V-SX 40x28AWG (7/0.127) LF

◆ Ordering description (ex.)

UL2651-V-SX 40x28AWG (7/0.102) LF

■ 品名代码: 185

◆ Product I.D. : 185