

IEEE 1394/4 PIN/RECEPTACLE/DIP 90° TYPE

MATERIAL SPECIFICATION

SHELL	STELL
HOUSING	THERMOPLASTIC,UL94V-0
COLOR	BLACK
CONTACT	COPPER ALLOY



ELECTRICAL CHARACTERISTIC



VOLTAGE CURRENT RATING	0.5AMP,5V AC
INSULATION RESISTANCE	100 mΩ Min.
CONTACT RESISTANCE	50mΩ Max.
DIELECTRIC WITHSTANDING VOLTAGE	AC 100V R.M.S.
TEMPERATURE RANGE	-20°C TO +85°C

PART NO.SPECIFICATION



I E N F - 04 * N - B R 0 0

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

1 : Au 1U"
6 : Au 30U"



P.C.B LAYOUT

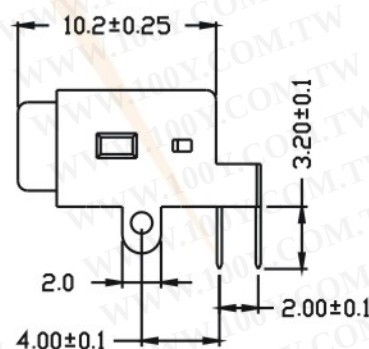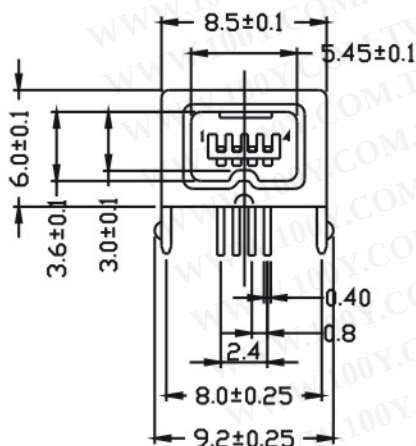

IEEE 1394 CONNECTOR

IEEE 1394/4 PIN/RECEPTACLE/DIP 90° TYPE

MATERIAL SPECIFICATION

SHELL	STELL
HOUSING	THERMOPLASTIC, UL94V-0
COLOR	BLACK
CONTACT	COPPER ALLOY

ELECTRICAL CHARACTERISTIC

VOLTAGE CURRENT RATING	0.5AMP, 5V AC
INSULATION RESISTANCE	100 mΩ Min.
CONTACT RESISTANCE	50mΩ Max.
DIELECTRIC WITHSTANDING VOLTAGE	AC 100V R.M.S.
TEMPERATURE RANGE	-20°C TO +85°C





PART NO. SPECIFICATION


I E N F - 04 * N - B R 05

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

1 : Au 1U"
 6 : Au 30U"

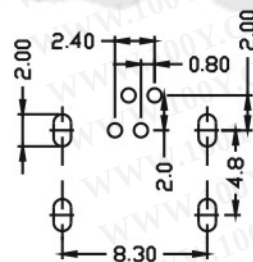

P.C.B LAYOUT

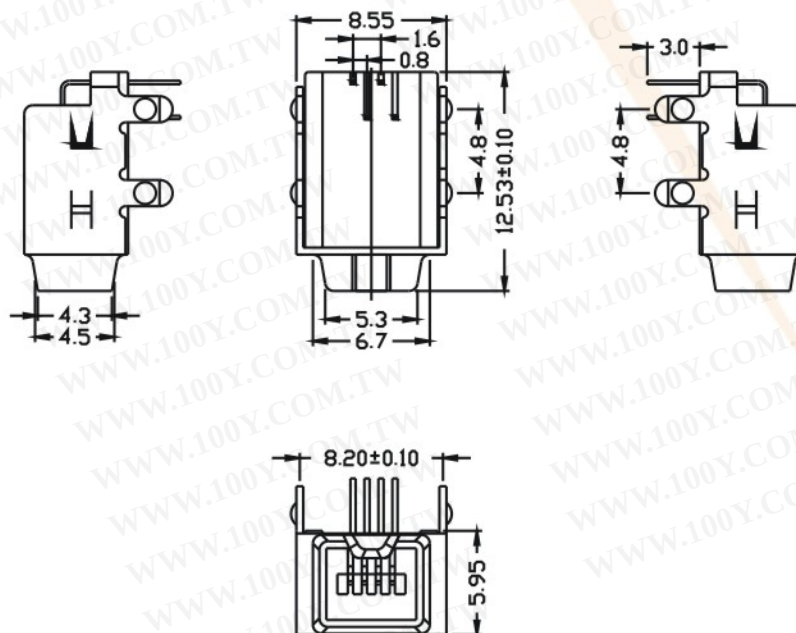

IEEE 1394/4 PIN/RECEPTACLE/SMT 90° TYPE

MATERIAL SPECIFICATION

SHELL	STELL
HOUSING	THERMOPLASTIC, UL94V-0
COLOR	BLACK
CONTACT	COPPER ALLOY

ELECTRICAL CHARACTERISTIC






VOLTAGE CURRENT RATING	0.5AMP, 5V AC
INSULATION RESISTANCE	100 mΩ Min.
CONTACT RESISTANCE	50mΩ Max.
DIELECTRIC WITHSTANDING VOLTAGE	AC 100V R.M.S.
TEMPERATURE RANGE	-20°C TO +85°C

PART NO. SPECIFICATION

I E N F - 04 * N - B H 0 5

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

1 : Au 1U"
6 : Au 30U"

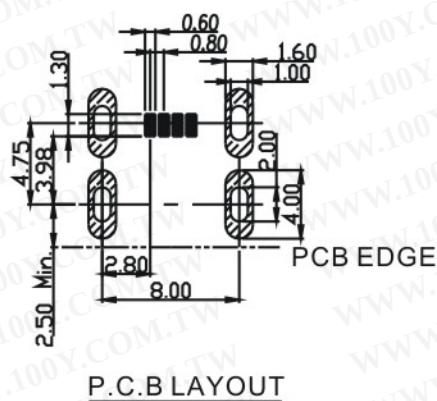

IEEE 1394 CONNECTOR

IEEE 1394/4 PIN/RECEPTACLE/DIP 180° TYPE

MATERIAL SPECIFICATION

SHELL	STELL
HOUSING	THERMOPLASTIC,UL94V-0
COLOR	BLACK
CONTACT	COPPER ALLOY

ELECTRICAL CHARACTERISTIC

VOLTAGE CURRENT RATING	0.5AMP,5V AC
INSULATION RESISTANCE	100 mΩ Min.
CONTACT RESISTANCE	50mΩ Max.
DIELECTRIC WITHSTANDING VOLTAGE	AC 100V R.M.S.
TEMPERATURE RANGE	-20°C TO +85°C




PART NO.SPECIFICATION

I E N F - 04 * N - B P 00

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

1 : Au 1U"
 6 : Au 30U"



P.C.B LAYOUT

