




SPECIFICATIONS:

1. Rating: 100mA @ 12VDC (resistive load)
2. Contact Resistance: 20m-ohms max.
3. Insulation Resistance: 100M-ohms @ 500VDC.
4. Dielectric Strength: 600VAC min. for 1 minute.
5. Electrical Life: 500,000 operations min.
6. Switch Function: OFF-(ON).
7. Operating Force: 180±50gf.
8. Travel: Pretravel 2.90mm, Overtravel 1.40mm, total travel 4.30mm.

MATERIALS:

1. Lower Housing: PA66+30%GF.
2. Terminal: Phosphor bronze, SnNi plated.
3. Movable Contact: Brass, AuNi plated.
4. LED: Red, Green, Blue, White.
5. LED Cover: PA66.
6. Upper Housing: PA66.
7. Diffuser: PC.
8. Sculpture Cap: PC, available with many color options.

REV. 更改	DESCRIPTION 說明	ENG. 修改人	APPROVE 審核

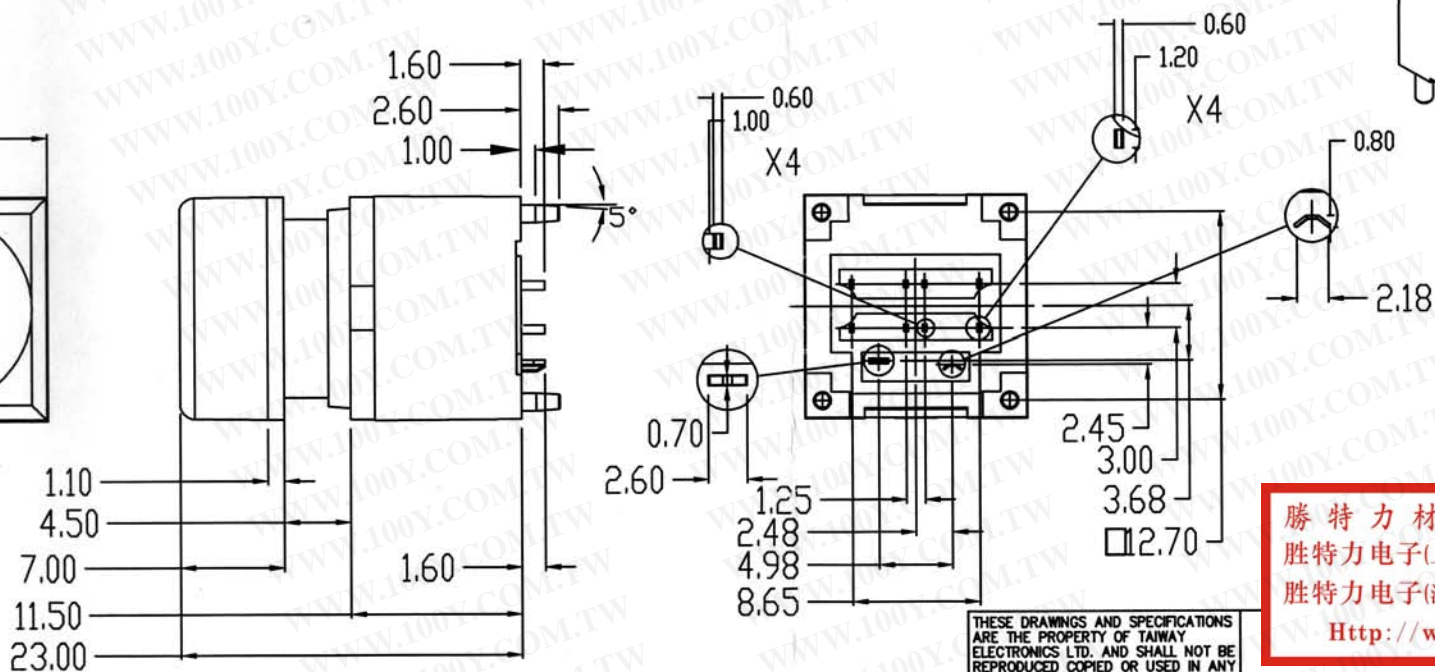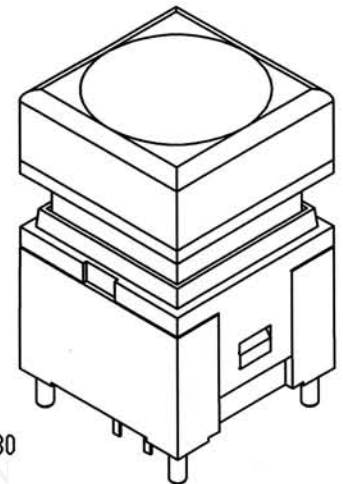

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TAIWAY ELECTRONICS LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF TAIWAY ELECTRONICS LTD.

DIMENSIONS	TOLERANCE
0.00 TO 30.00mm	±0.20mm
30.01 TO 80.00mm	±0.25mm
80.01 TO 150.00mm	±0.30mm
150.01	±0.40mm

USED 用途	IP	APPD. 審核	Amy 2007/05/10
FINISH 處理		CHKD. 校對	Amy 2007/05/10
SCALE 比例	1 / 1	DR. 製圖	Amy 2007/05/10
TITLE 名稱	LED PUSHBUTTON SWITCH		
DWG NO. 圖號	IP-SP9-P1-S-0-RGBW-RE		SIZE 圖紙
FILE NAME 檔案名稱	IP-SP9.dwg	SHEET 張	1 / 1
		REV. 更改	1